



# 日立照明器具 照明特性


|                                                                                                            |          |             |      |             |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
|------------------------------------------------------------------------------------------------------------|----------|-------------|------|-------------|------|------|------|------|------|------|------|------|------|------|------|------|----|----|
| 形式： NLE32401W-JZU14A                                                                                       |          | 反<br>射<br>率 | 天井   | 80%         |      |      | 70%  |      |      |      | 50%  |      |      | 30%  |      |      | 0% |    |
| <高出力タイプ>                                                                                                   |          |             | 壁    | 70%         | 50%  | 30%  | 70%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0% |    |
| <白色相当>                                                                                                     |          |             | 床    | 10%         |      |      |      |      |      |      |      |      |      |      |      |      |    | 0% |
| <初期照度補正、連続調光共用形>                                                                                           |          |             | 室指数  | 照明率 S/H=1.0 |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| <div>姿図</div> <div></div> |          | 0.6         | 0.59 | 0.48        | 0.40 | 0.58 | 0.47 | 0.40 | 0.35 | 0.46 | 0.39 | 0.35 | 0.45 | 0.39 | 0.34 | 0.33 |    |    |
|                                                                                                            |          | 0.8         | 0.69 | 0.58        | 0.50 | 0.67 | 0.57 | 0.50 | 0.45 | 0.56 | 0.49 | 0.44 | 0.54 | 0.49 | 0.44 | 0.42 |    |    |
|                                                                                                            |          | 1           | 0.75 | 0.65        | 0.58 | 0.74 | 0.64 | 0.57 | 0.52 | 0.63 | 0.56 | 0.52 | 0.61 | 0.56 | 0.51 | 0.49 |    |    |
|                                                                                                            |          | 1.25        | 0.81 | 0.72        | 0.65 | 0.79 | 0.71 | 0.64 | 0.59 | 0.69 | 0.63 | 0.59 | 0.67 | 0.62 | 0.58 | 0.56 |    |    |
|                                                                                                            |          | 1.5         | 0.85 | 0.77        | 0.71 | 0.84 | 0.76 | 0.70 | 0.65 | 0.74 | 0.69 | 0.64 | 0.72 | 0.68 | 0.64 | 0.62 |    |    |
|                                                                                                            |          | 2           | 0.91 | 0.84        | 0.78 | 0.89 | 0.83 | 0.78 | 0.73 | 0.81 | 0.76 | 0.72 | 0.79 | 0.75 | 0.72 | 0.69 |    |    |
|                                                                                                            |          | 2.5         | 0.94 | 0.88        | 0.83 | 0.93 | 0.87 | 0.82 | 0.78 | 0.85 | 0.81 | 0.77 | 0.83 | 0.80 | 0.76 | 0.74 |    |    |
|                                                                                                            |          | 3           | 0.96 | 0.91        | 0.87 | 0.95 | 0.90 | 0.86 | 0.82 | 0.88 | 0.84 | 0.81 | 0.86 | 0.83 | 0.80 | 0.77 |    |    |
| 光 源                                                                                                        |          | 4           | 0.99 | 0.95        | 0.91 | 0.98 | 0.94 | 0.90 | 0.87 | 0.92 | 0.89 | 0.86 | 0.89 | 0.87 | 0.85 | 0.82 |    |    |
| 品名                                                                                                         | LED      | 5           | 1.01 | 0.98        | 0.95 | 1.00 | 0.96 | 0.94 | 0.91 | 0.94 | 0.92 | 0.89 | 0.92 | 0.90 | 0.88 | 0.85 |    |    |
| 形式                                                                                                         |          | 7           | 1.03 | 1.01        | 0.99 | 1.02 | 1.00 | 0.98 | 0.96 | 0.97 | 0.96 | 0.94 | 0.95 | 0.94 | 0.92 | 0.90 |    |    |
| 光束                                                                                                         | 7,640 lm | 10          | 1.05 | 1.04        | 1.02 | 1.04 | 1.02 | 1.01 | 1.00 | 1.00 | 0.99 | 0.98 | 0.98 | 0.97 | 0.96 | 0.93 |    |    |

|                 |      |      |
|-----------------|------|------|
| 器具効率 Ft= 100.0% |      |      |
| 上方光束 Fu= 0.0%   |      |      |
| 下方光束 Fd= 100.0% |      |      |
| 配光分類            |      |      |
| BZ-             |      |      |
| 最大取付間隔          |      |      |
| A-A             | 1.32 | H    |
| B-B             | 1.14 | H    |
| 保守率             | 良    | 0.86 |
|                 | 中    | 0.81 |
|                 | 否    | 0.72 |

単体照度分布(初期)

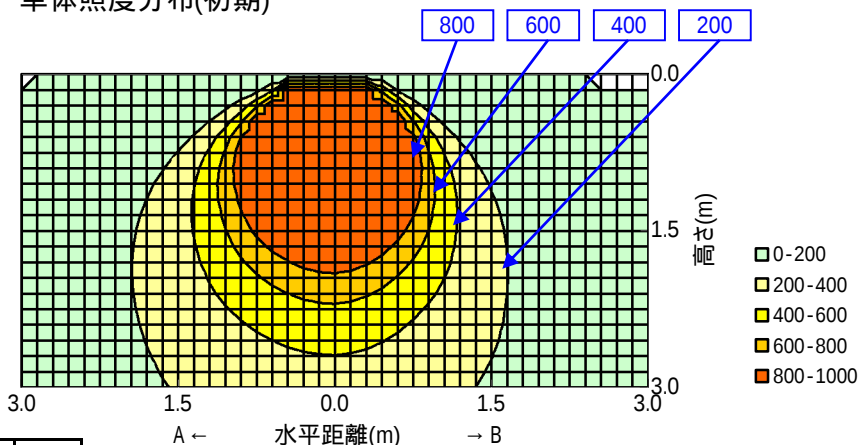

配光曲線

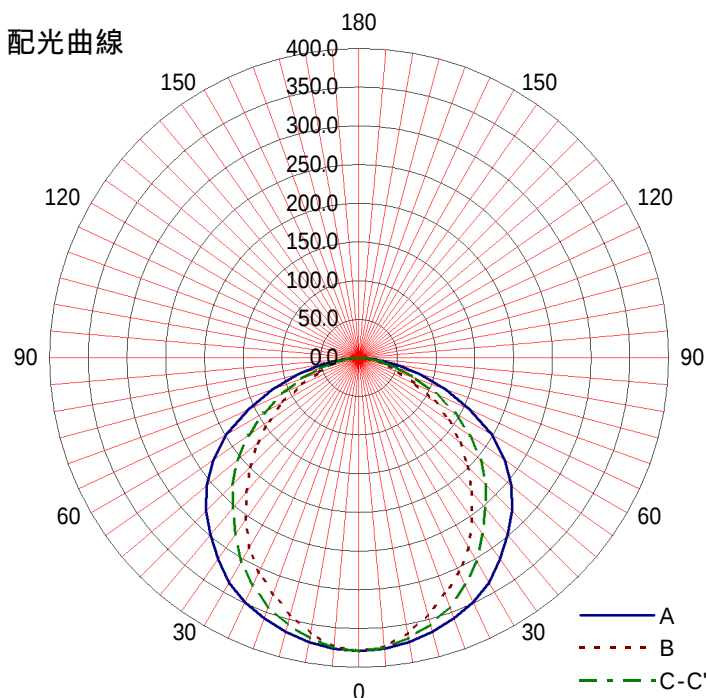

| 光度 (cd/1000 lm) |     |     |     |      |      |
|-----------------|-----|-----|-----|------|------|
|                 | A-0 | B-B | C-0 | A'-0 | C'-0 |
| 0               | 379 | 379 | 379 |      |      |
| 10              | 373 | 361 | 367 |      |      |
| 20              | 358 | 325 | 342 |      |      |
| 30              | 336 | 284 | 304 |      |      |
| 40              | 299 | 226 | 254 |      |      |
| 50              | 257 | 171 | 206 |      |      |
| 60              | 198 | 113 | 143 |      |      |
| 70              | 119 | 55  | 79  |      |      |
| 80              | 49  | 26  | 31  |      |      |
| 90              |     |     |     |      |      |
| 100             |     |     |     |      |      |
| 110             |     |     |     |      |      |
| 120             |     |     |     |      |      |
| 130             |     |     |     |      |      |
| 140             |     |     |     |      |      |
| 150             |     |     |     |      |      |
| 160             |     |     |     |      |      |
| 170             |     |     |     |      |      |
| 180             |     |     |     |      |      |