
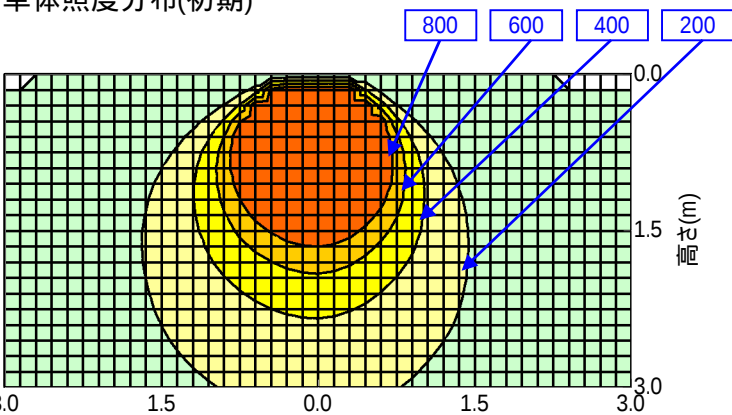
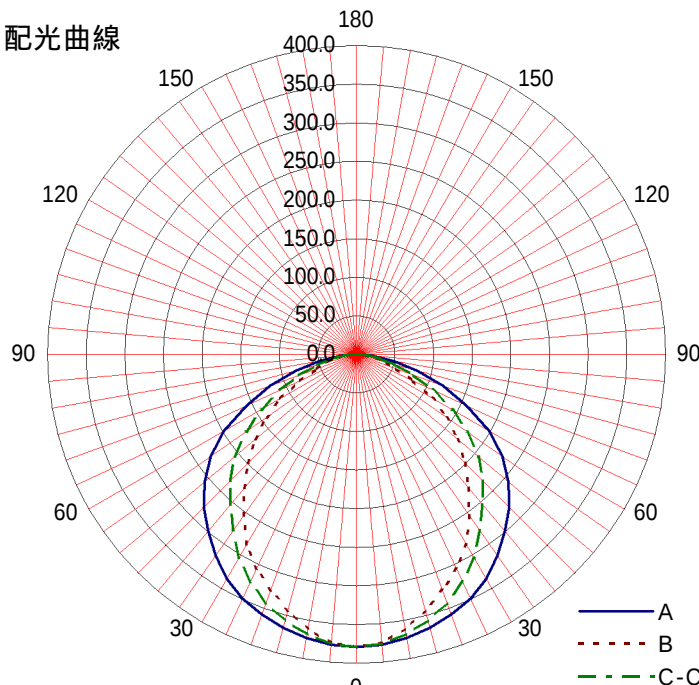


日立照明器具 照明特性

形式: NLE32401WW-JZ14 <定格出力タイプ> <温白色相当> <照度補正、連続調光共用形>		天井 反射率	80%			70%				50%			30%			0%																	
			壁	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																	
床	10%																0%																
	室指数																	照明率 S/H=1.0															
																		0.6	0.59	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.34	0.33	
0.8																		0.69	0.58	0.50	0.67	0.57	0.50	0.45	0.56	0.49	0.44	0.54	0.49	0.44	0.42		
1																		0.75	0.65	0.58	0.74	0.64	0.57	0.52	0.63	0.56	0.52	0.61	0.56	0.51	0.49		
1.25																		0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.69	0.63	0.59	0.67	0.62	0.58	0.56		
1.5																		0.85	0.77	0.71	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.62		
2																		0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.72	0.79	0.75	0.72	0.69		
2.5																		0.94	0.88	0.83	0.93	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.80	0.76	0.74		
3																		0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.77		
光源																		4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.92	0.89	0.86	0.89	0.87	0.85	0.82	
品名																		LED	5	1.01	0.98	0.95	1.00	0.96	0.94	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85
形式		7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.97	0.96	0.94	0.95	0.94	0.92	0.90																	
光束	5,760 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.93																	

器具効率 Ft= 100.0%			単体照度分布(初期)  0-200 200-400 400-600 600-800 800-1000													
上方光束 Fu= 0.0%																
下方光束 Fd= 100.0%																
配光分類																
BZ-																
最大取付間隔																
A-A 1.32 H																
B-B 1.14 H																
保守率	良	0.81														
	中	0.77														
	否	0.68														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	379	379	379													
10	373	361	367													
20	358	325	342													
30	336	284	304													
40	299	226	254													
50	257	171	206													
60	198	113	143													
70	119	55	79													
80	49	26	31													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																

配光曲線		
		
A B C-C'		