
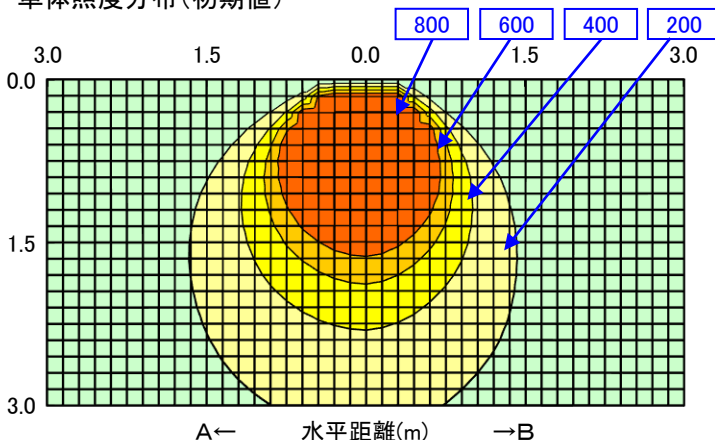
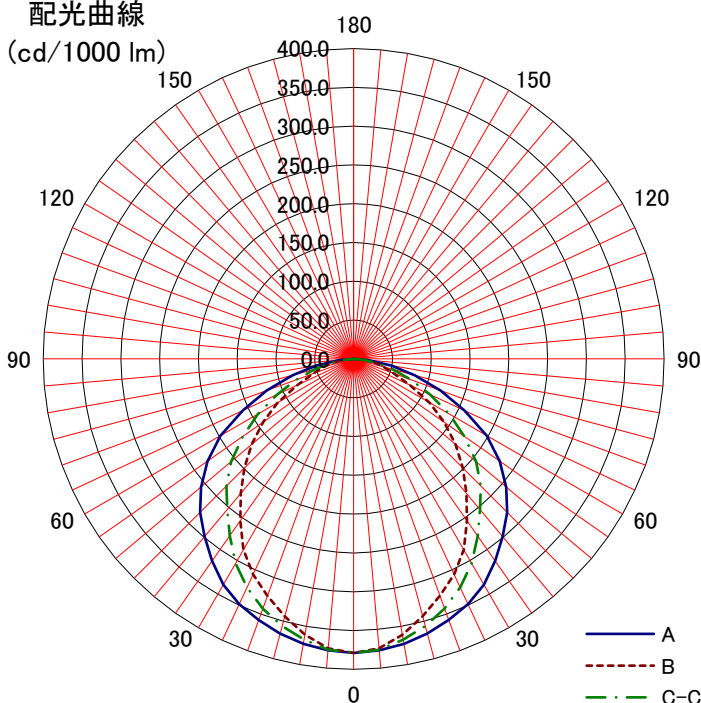


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: NLE324AL-JZ14A	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.59	0.47	0.40	0.58	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.34	0.33	
	0.8	0.69	0.58	0.50	0.67	0.57	0.50	0.45	0.56	0.49	0.44	0.54	0.49	0.44	0.42	
姿図 	1	0.75	0.65	0.58	0.74	0.64	0.57	0.52	0.63	0.56	0.52	0.61	0.56	0.51	0.49	
	1.25	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.69	0.63	0.59	0.67	0.62	0.58	0.56	
	1.5	0.85	0.77	0.70	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.62	
	2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.72	0.79	0.75	0.72	0.69	
	2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74	
	3	0.96	0.91	0.86	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.77	
光源形式 -	4	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.89	0.86	0.89	0.87	0.85	0.82	
	5	1.01	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85	
器具光束 5,620 lm	7	1.03	1.01	0.98	1.02	1.00	0.98	0.96	0.97	0.96	0.94	0.95	0.94	0.92	0.90	
	10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.32 H																
B-B 1.14 H																
保守率	良	0.86														
	中	0.81														
	否	0.72														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	379	379	379													
10	373	361	367													
20	358	325	342													
30	336	284	304													
40	299	226	254													
50	257	171	206													
60	198	113	143													
70	119	55	79													
80	49	26	31													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																
配光曲線 (cd/1000 lm)																
		A B C-C'														