
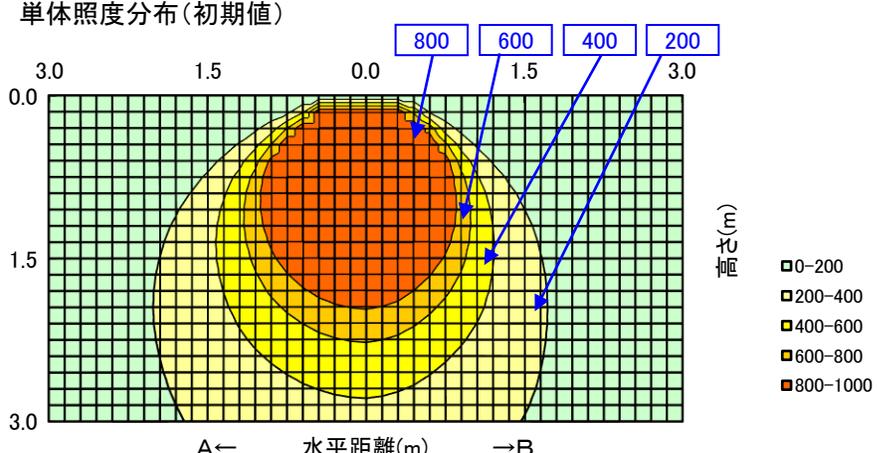


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	80%			70%				50%			30%			0%
		天井	壁	床	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: NLE324AN-JZU14A		固有照明率 S/H=1.0													
<備考>	室指数	固有照明率 S/H=1.0													
	0.6	0.59	0.47	0.40	0.58	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.34	0.33
姿図 	0.8	0.69	0.58	0.50	0.67	0.57	0.50	0.45	0.56	0.49	0.44	0.54	0.49	0.44	0.42
	1	0.75	0.65	0.58	0.74	0.64	0.57	0.52	0.63	0.56	0.52	0.61	0.56	0.51	0.49
	1.25	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.69	0.63	0.59	0.67	0.62	0.58	0.56
	1.5	0.85	0.77	0.70	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.62
	2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.72	0.79	0.75	0.72	0.69
	2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74
光源形式	4	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.89	0.86	0.89	0.87	0.85	0.82
器具光束 8,200 lm	5	1.01	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85
	7	1.03	1.01	0.98	1.02	1.00	0.98	0.96	0.97	0.96	0.94	0.95	0.94	0.92	0.90
器具効率 Ft= 100%	10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93
上方光束 Fu= 0%	単体照度分布(初期値) 														
下方光束 Fd= 100%															
最大取付間隔															
A-A		1.32	H												
B-B		1.14	H												
保守率	良	0.86													
	中	0.81													
	否	0.72													
光度 (cd/1000 lm)															
	A-0	B-B	C-0	A'-0	C'-0										
0	379	379	379												
10	373	361	367												
20	358	325	342												
30	336	284	304												
40	299	226	254												
50	257	171	206												
60	198	113	143												
70	119	55	79												
80	49	26	31												
90															
100															
110															
120															
130															
140															
150															
160															
170															
180															
配光曲線 (cd/1000 lm)		