
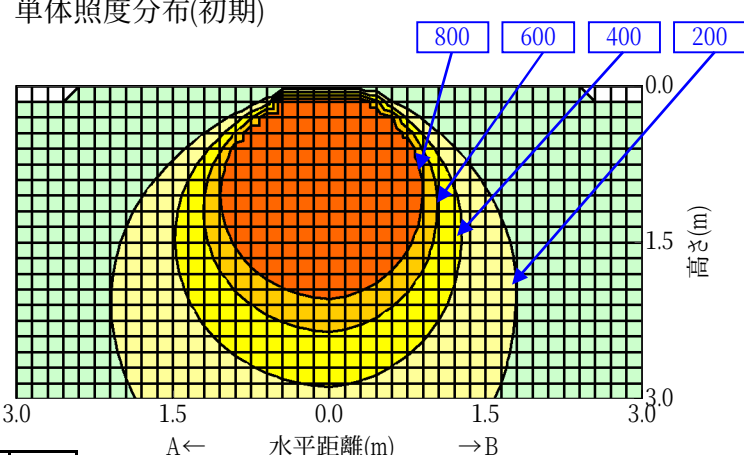
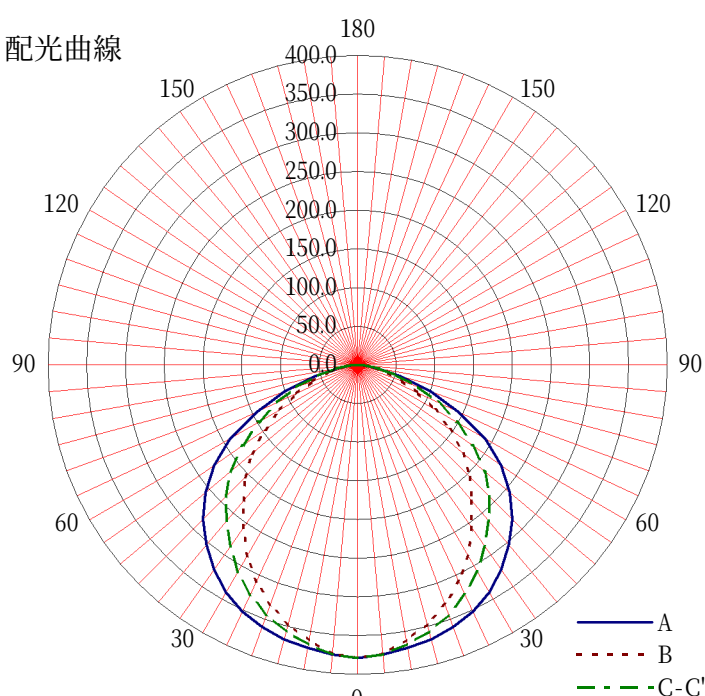


日立照明器具 照明特性

形式: NLE45401D-JZ14A		天井	80%			70%				50%			30%			0%
<定格出力タイプ>		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
<昼光色相当>		床	10%													0%
<初期照度補正、連続調光共用形>		室指数	照明率 S/H=1.0													
姿図 		0.6	0.60	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33
		0.8	0.69	0.58	0.51	0.68	0.58	0.50	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43
		1	0.76	0.66	0.58	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.62	0.56	0.52	0.50
		1.25	0.82	0.72	0.66	0.80	0.72	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.57
		1.5	0.86	0.78	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.65	0.73	0.69	0.65	0.62
		2	0.92	0.85	0.79	0.90	0.84	0.79	0.74	0.82	0.77	0.73	0.80	0.76	0.73	0.70
		2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75
		3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78
光源		4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83
品名	LED	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86
形式		7	1.04	1.02	0.99	1.03	1.00	0.98	0.97	0.98	0.96	0.95	0.96	0.95	0.93	0.90
光束	8,770 lm	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.94

器具効率 Ft= 100.0%			単体照度分布(初期) 				
上方光束 Fu= 0.0%							
下方光束 Fd= 100.0%							
配光分類							
BZ-							
最大取付間隔							
A-A 1.34 H							
B-B 1.14 H							
保守率	良	0.86					
	中	0.81					
	否	0.72					
光度 (cd/1000 lm)							
	A-0	B-B	C-0	A'-0	C'-0		
0	379	379	379				
10	372	361	366				
20	361	330	344				
30	339	286	309				
40	304	229	263				
50	256	178	215				
60	190	116	148				
70	101	62	84				
80	27	23	28				
90							
100							
110							
120							
130							
140							
150							
160							
170							
180							

配光曲線	
	A B C-C'