



日立照明器具 照明特性

形式: NLE45401D-JZU14		反射率	天井	80%			70%				50%			30%			0%
<高出力タイプ> <昼光色相当> <照度補正、連続調光共用形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
		室指数	照明率 S/H=1.0														
姿図 		0.6	0.60	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33	
		0.8	0.69	0.58	0.51	0.68	0.58	0.50	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43	
		1	0.76	0.66	0.58	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.62	0.56	0.52	0.50	
		1.25	0.82	0.72	0.66	0.80	0.72	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.57	
		1.5	0.86	0.78	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.65	0.73	0.69	0.65	0.62	
		2	0.92	0.85	0.79	0.90	0.84	0.79	0.74	0.82	0.77	0.73	0.80	0.76	0.73	0.70	
		2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75	
		3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78	
光源		4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83	
品名	LED	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86	
形式		7	1.04	1.02	0.99	1.03	1.00	0.98	0.97	0.98	0.96	0.95	0.96	0.95	0.93	0.90	
光束	11,580 lm	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.94	
器具効率 Ft= 100.0%			単体照度分布(初期)  800600400200 0.01.53.0 3.01.50.01.53.0 水平距離(m) 高さ(m) 0-200 200-400 400-600 600-800 800-1000														
上方光束 Fu= 0.0%																	
下方光束 Fd= 100.0%																	
配光分類																	
BZ-																	
最大取付間隔																	
A-A 1.34 H																	
B-B 1.14 H																	
保守率	良	0.81															
	中	0.77															
	否	0.68															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	379	379	379														
10	372	361	366														
20	361	330	344														
30	339	286	309														
40	304	229	263														
50	256	178	215														
60	190	116	148														
70	101	62	84														
80	27	23	28														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	

配光曲線		
180	150	150
400.0	350.0	300.0
250.0	200.0	150.0
100.0	50.0	0.0
0.0	0.0	0.0
90	120	120
60	30	30
30	0	0
0	30	30
30	60	60
60	90	90
90	120	120
120	150	150
150	180	180
A B C-C'		

配光曲線

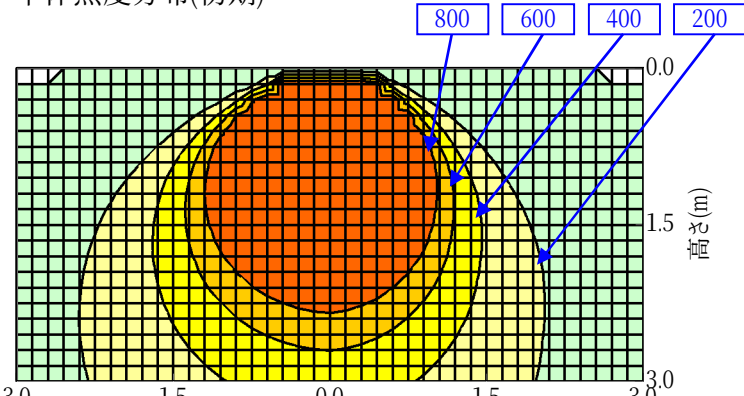