
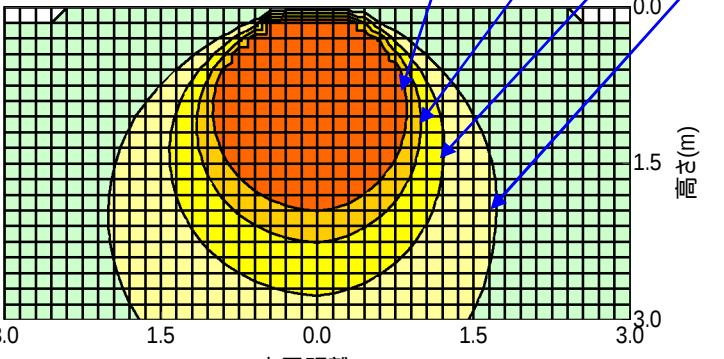
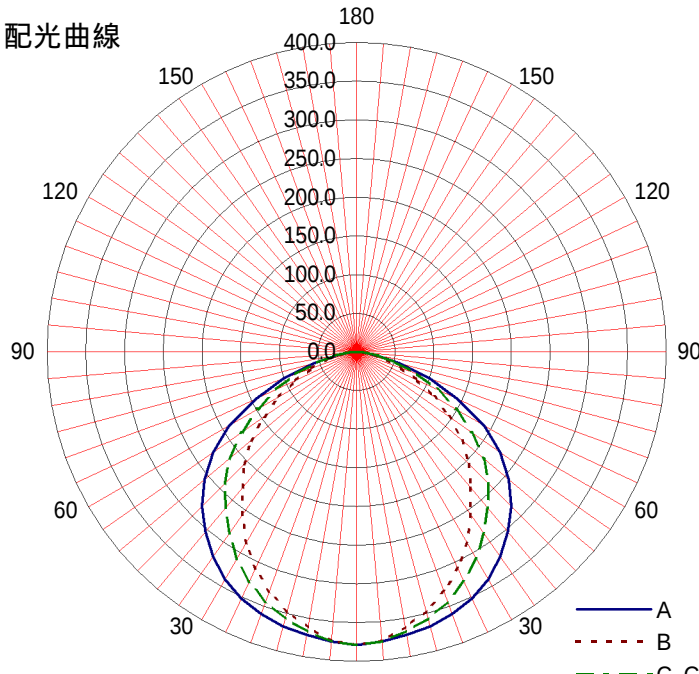


日立照明器具 照明特性

形式: NLE45401L-JZ14A		天井	80%			70%				50%			30%			0%
<定格出力タイプ>		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
<電球色相当>		床	10%													0%
<初期照度補正、連続調光共用形>		室指数	照明率 S/H=1.0													
姿図 		0.6	0.60	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33
		0.8	0.69	0.58	0.51	0.68	0.58	0.50	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43
		1	0.76	0.66	0.58	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.62	0.56	0.52	0.50
		1.25	0.82	0.72	0.66	0.80	0.72	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.57
		1.5	0.86	0.78	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.65	0.73	0.69	0.65	0.62
		2	0.92	0.85	0.79	0.90	0.84	0.79	0.74	0.82	0.77	0.73	0.80	0.76	0.73	0.70
		2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75
		3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78
		4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83
		品名	LED	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91
形式		7	1.04	1.02	0.99	1.03	1.00	0.98	0.97	0.98	0.96	0.95	0.96	0.95	0.93	0.90
光束	8,060 lm	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.94

器具効率 Ft= 100.0%			単体照度分布(初期) 													
上方光束 Fu= 0.0%																
下方光束 Fd= 100.0%																
配光分類																
BZ-																
最大取付間隔			配光曲線 													
A-A 1.34 H																
B-B 1.14 H																
保守率	良	0.86	光度 (cd/1000 lm)													
			A-0	B-B	C-0	A'-0	C'-0									
			0	379	379	379										
			10	372	361	366										
			20	361	330	344										
			30	339	286	309										
			40	304	229	263										
			50	256	178	215										
			60	190	116	148										
			70	101	62	84										
			80	27	23	28										
			90													
			100													
			110													
			120													
			130													
			140													
			150													
			160													
			170													
			180													