



# 日立照明器具 照明特性

|                                                                                                 |           |             |      |             |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
|-------------------------------------------------------------------------------------------------|-----------|-------------|------|-------------|------|------|------|------|------|------|------|------|------|------|------|------|----|----|
| 形式： NLE45401N-JZU14A                                                                            |           | 反<br>射<br>率 | 天井   | 80%         |      |      | 70%  |      |      |      | 50%  |      |      | 30%  |      |      | 0% |    |
| <高出力タイプ>                                                                                        |           |             | 壁    | 70%         | 50%  | 30%  | 70%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0% |    |
| <昼白色相当>                                                                                         |           |             | 床    | 10%         |      |      |      |      |      |      |      |      |      |      |      |      |    | 0% |
| <初期照度補正、連続調光共用形>                                                                                |           |             | 室指数  | 照明率 S/H=1.0 |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| <div>姿図</div>  |           | 0.6         | 0.60 | 0.48        | 0.40 | 0.58 | 0.47 | 0.40 | 0.35 | 0.46 | 0.40 | 0.35 | 0.45 | 0.39 | 0.35 | 0.33 |    |    |
|                                                                                                 |           | 0.8         | 0.69 | 0.58        | 0.51 | 0.68 | 0.58 | 0.50 | 0.45 | 0.56 | 0.50 | 0.45 | 0.55 | 0.49 | 0.45 | 0.43 |    |    |
|                                                                                                 |           | 1           | 0.76 | 0.66        | 0.58 | 0.74 | 0.65 | 0.58 | 0.53 | 0.63 | 0.57 | 0.52 | 0.62 | 0.56 | 0.52 | 0.50 |    |    |
|                                                                                                 |           | 1.25        | 0.82 | 0.72        | 0.66 | 0.80 | 0.72 | 0.65 | 0.60 | 0.70 | 0.64 | 0.59 | 0.68 | 0.63 | 0.59 | 0.57 |    |    |
|                                                                                                 |           | 1.5         | 0.86 | 0.78        | 0.71 | 0.84 | 0.77 | 0.71 | 0.66 | 0.75 | 0.70 | 0.65 | 0.73 | 0.69 | 0.65 | 0.62 |    |    |
|                                                                                                 |           | 2           | 0.92 | 0.85        | 0.79 | 0.90 | 0.84 | 0.79 | 0.74 | 0.82 | 0.77 | 0.73 | 0.80 | 0.76 | 0.73 | 0.70 |    |    |
|                                                                                                 |           | 2.5         | 0.95 | 0.89        | 0.84 | 0.93 | 0.88 | 0.83 | 0.79 | 0.86 | 0.82 | 0.78 | 0.84 | 0.80 | 0.77 | 0.75 |    |    |
|                                                                                                 |           | 3           | 0.97 | 0.92        | 0.87 | 0.95 | 0.91 | 0.87 | 0.83 | 0.89 | 0.85 | 0.82 | 0.87 | 0.84 | 0.81 | 0.78 |    |    |
| 光源                                                                                              |           | 4           | 1.00 | 0.96        | 0.92 | 0.98 | 0.95 | 0.91 | 0.88 | 0.92 | 0.90 | 0.87 | 0.90 | 0.88 | 0.86 | 0.83 |    |    |
| 品名                                                                                              | LED       | 5           | 1.02 | 0.98        | 0.95 | 1.00 | 0.97 | 0.94 | 0.92 | 0.95 | 0.93 | 0.90 | 0.93 | 0.91 | 0.89 | 0.86 |    |    |
| 形式                                                                                              |           | 7           | 1.04 | 1.02        | 0.99 | 1.03 | 1.00 | 0.98 | 0.97 | 0.98 | 0.96 | 0.95 | 0.96 | 0.95 | 0.93 | 0.90 |    |    |
| 光束                                                                                              | 11,950 lm | 10          | 1.06 | 1.04        | 1.03 | 1.04 | 1.03 | 1.02 | 1.00 | 1.01 | 1.00 | 0.98 | 0.99 | 0.98 | 0.97 | 0.94 |    |    |

|          |        |
|----------|--------|
| 器具効率 Ft= | 100.0% |
| 上方光束 Fu= | 0.0%   |
| 下方光束 Fd= | 100.0% |
| 配光分類     | BZ-    |
| 最大取付間隔   |        |
| A-A      | 1.34 H |
| B-B      | 1.14 H |
| 保守率      | 良 0.86 |
|          | 中 0.81 |
|          | 否 0.72 |

単体照度分布(初期)

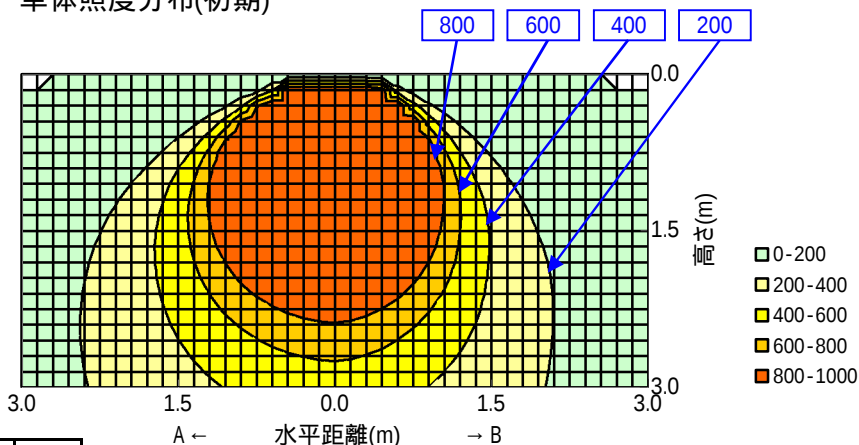

| 光度 (cd/1000 lm) | A-0 | B-B | C-0 | A'-0 | C'-0 |
|-----------------|-----|-----|-----|------|------|
| 0               | 379 | 379 | 379 |      |      |
| 10              | 372 | 361 | 366 |      |      |
| 20              | 361 | 330 | 344 |      |      |
| 30              | 339 | 286 | 309 |      |      |
| 40              | 304 | 229 | 263 |      |      |
| 50              | 256 | 178 | 215 |      |      |
| 60              | 190 | 116 | 148 |      |      |
| 70              | 101 | 62  | 84  |      |      |
| 80              | 27  | 23  | 28  |      |      |
| 90              |     |     |     |      |      |
| 100             |     |     |     |      |      |
| 110             |     |     |     |      |      |
| 120             |     |     |     |      |      |
| 130             |     |     |     |      |      |
| 140             |     |     |     |      |      |
| 150             |     |     |     |      |      |
| 160             |     |     |     |      |      |
| 170             |     |     |     |      |      |
| 180             |     |     |     |      |      |

配光曲線

