


日立照明器具 照明特性

形式: NLE45401W-JZ14A		天井	80%			70%				50%			30%			0%
<定格出力タイプ> <白色相当> <初期照度補正、連続調光共用形>		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
		室指数	照明率 S/H=1.0													
姿図 		0.6	0.60	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33
		0.8	0.69	0.58	0.51	0.68	0.58	0.50	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43
		1	0.76	0.66	0.58	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.62	0.56	0.52	0.50
		1.25	0.82	0.72	0.66	0.80	0.72	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.57
		1.5	0.86	0.78	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.65	0.73	0.69	0.65	0.62
		2	0.92	0.85	0.79	0.90	0.84	0.79	0.74	0.82	0.77	0.73	0.80	0.76	0.73	0.70
		2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75
		3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78
		4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83
		5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86
品名	LED	7	1.04	1.02	0.99	1.03	1.00	0.98	0.97	0.98	0.96	0.95	0.96	0.95	0.93	0.90
形式		10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.94
光束	8,680 lm															

器具効率 Ft= 100.0%

上方光束 Fu= 0.0%

下方光束 Fd= 100.0%

配光分類

BZ-

最大取付間隔

A-A 1.34 H

B-B 1.14 H

保守率

良 0.86


中 0.81

否 0.72

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	379	379	379		
10	372	361	366		
20	361	330	344		
30	339	286	309		
40	304	229	263		
50	256	178	215		
60	190	116	148		
70	101	62	84		
80	27	23	28		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

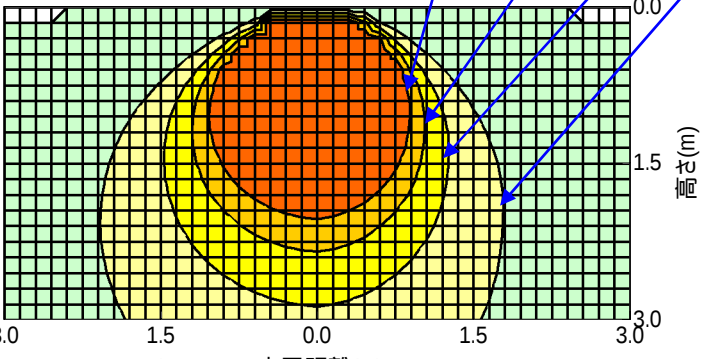

800 600 400 200


0.0 1.5 3.0

3.0 1.5 0.0 1.5 3.0

A ← 水平距離(m) → B

0-200
200-400
400-600
600-800
800-1000

配光曲線

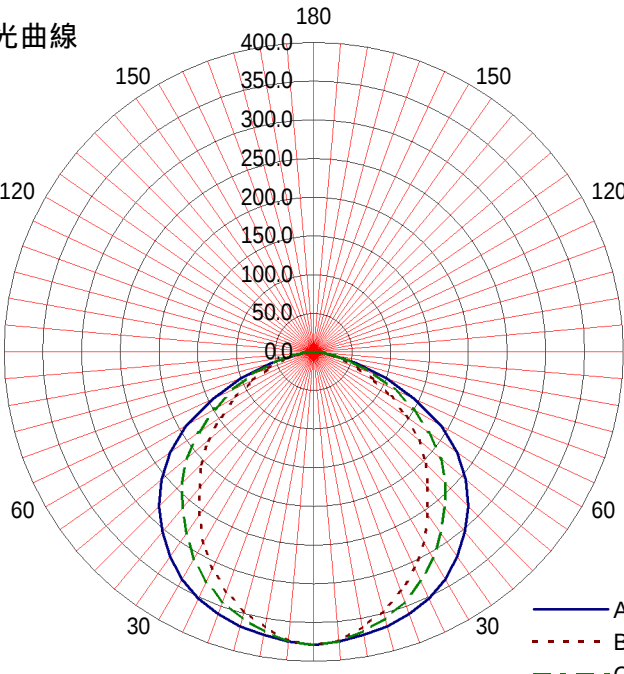

180 150 120 90 60 30 0

400.0 350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0

0 30 60 90 120 150 180

A
B
C-C'