
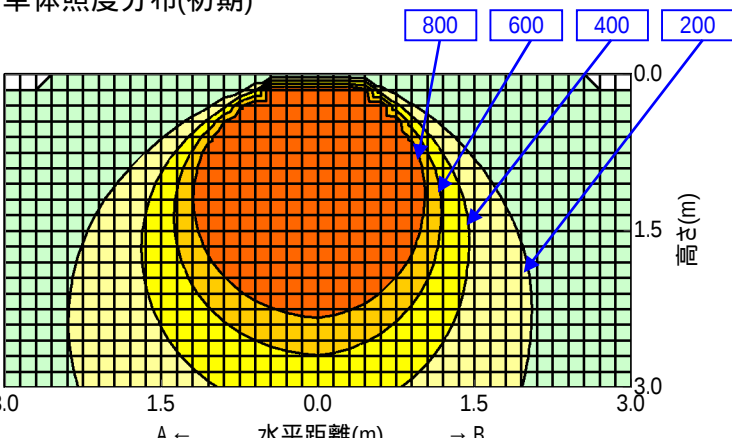
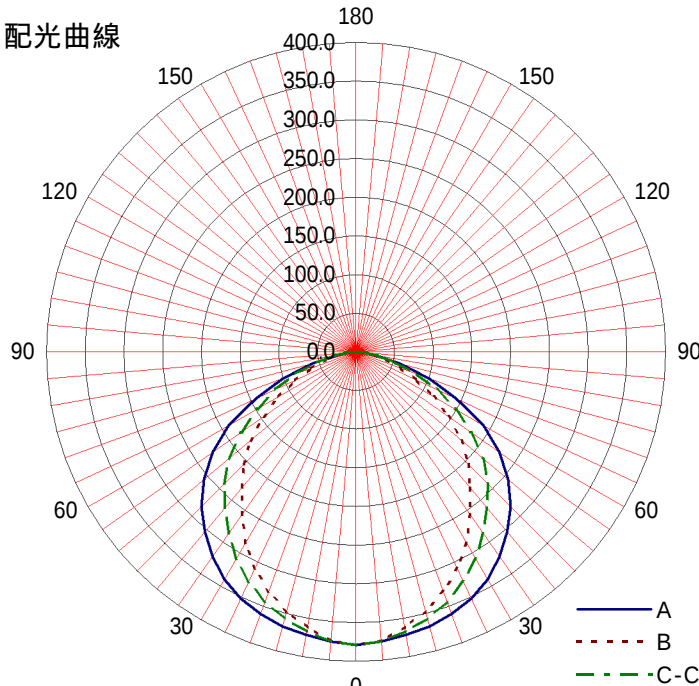


日立照明器具 照明特性

形式: NLE45401W-JZU14		反 射 率	天井	80%			70%				50%			30%			0%		
<高出力タイプ> <白色相当> <照度補正、連続調光共用形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.60	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33			
		0.8	0.69	0.58	0.51	0.68	0.58	0.50	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43			
		1	0.76	0.66	0.58	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.62	0.56	0.52	0.50			
		1.25	0.82	0.72	0.66	0.80	0.72	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.57			
		1.5	0.86	0.78	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.65	0.73	0.69	0.65	0.62			
		2	0.92	0.85	0.79	0.90	0.84	0.79	0.74	0.82	0.77	0.73	0.80	0.76	0.73	0.70			
		2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75			
		3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78			
		4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83			
		品名	LED	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86	
形式		7	1.04	1.02	0.99	1.03	1.00	0.98	0.97	0.98	0.96	0.95	0.96	0.95	0.93	0.90			
光束	11,460 lm	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.94			

器具効率 Ft= 100.0%			単体照度分布(初期) 					
上方光束 Fu= 0.0%								
下方光束 Fd= 100.0%								
配光分類								
BZ-								
最大取付間隔			配光曲線 					
A-A 1.34 H								
B-B 1.14 H								
保守率	良	0.81						
	中	0.77						
	否	0.68						
光度 (cd/1000 lm)								
	A-0	B-B	C-0	A'-0	C'-0			
0	379	379	379					
10	372	361	366					
20	361	330	344					
30	339	286	309					
40	304	229	263					
50	256	178	215					
60	190	116	148					
70	101	62	84					
80	27	23	28					
90								
100								
110								
120								
130								
140								
150								
160								
170								
180								