
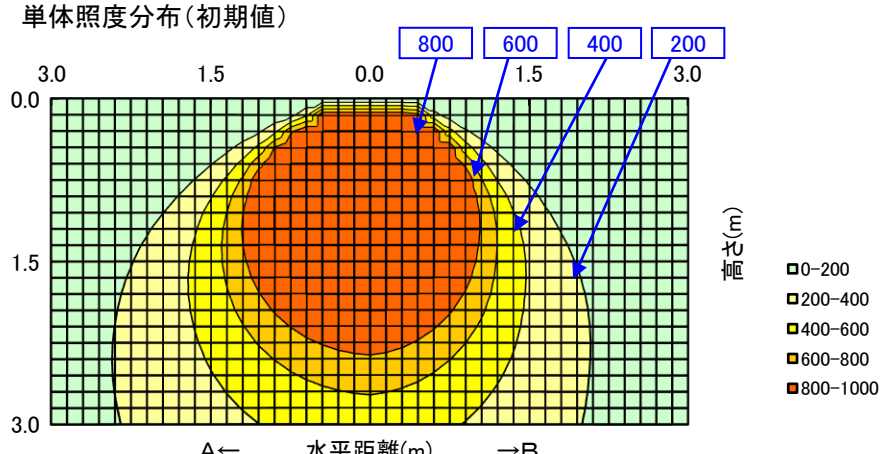


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: NLE454AD-JZU14A	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.60	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33	
	0.8	0.69	0.58	0.51	0.68	0.58	0.50	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43	
姿図 	1	0.76	0.66	0.58	0.74	0.65	0.58	0.52	0.63	0.57	0.52	0.62	0.56	0.52	0.50	
	1.25	0.82	0.72	0.65	0.80	0.71	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.57	
	1.5	0.86	0.78	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.65	0.73	0.69	0.65	0.62	
	2	0.91	0.85	0.79	0.90	0.84	0.78	0.74	0.82	0.77	0.73	0.80	0.76	0.73	0.70	
	2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75	
	3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.78	
	4	1.00	0.96	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.83	
光源形式 -	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86	
	7	1.04	1.01	0.99	1.03	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.90	
器具光束 11,800 lm	10	1.06	1.04	1.03	1.04	1.03	1.01	1.00	1.01	0.99	0.98	0.99	0.98	0.97	0.94	
	器具効率 Ft= 100%															
上方光束 Fu= 0%		単体照度分布(初期値)														
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.34 H																
B-B 1.14 H																
保守率	良	0.86														
	中	0.81														
	否	0.72														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	379	379	379													
10	372	361	366													
20	361	330	344													
30	339	286	309													
40	304	229	263													
50	256	178	215													
60	190	116	148													
70	101	62	84													
80	27	23	28													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																
		配光曲線 (cd/1000 lm)														
		