
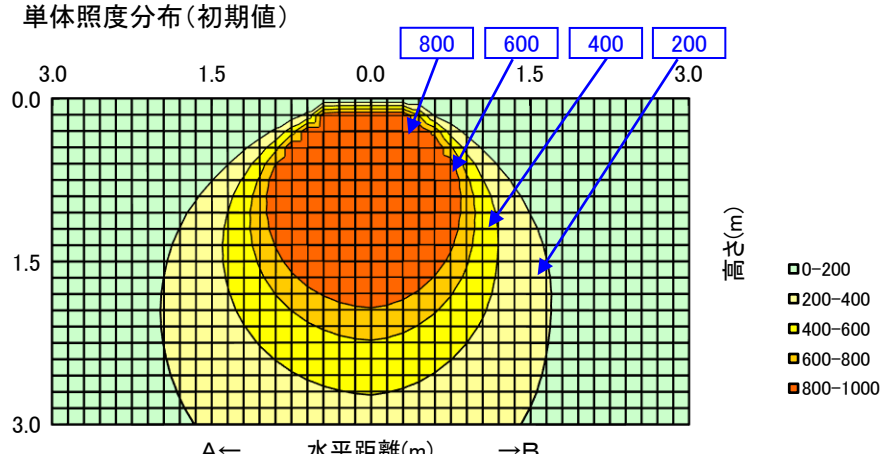
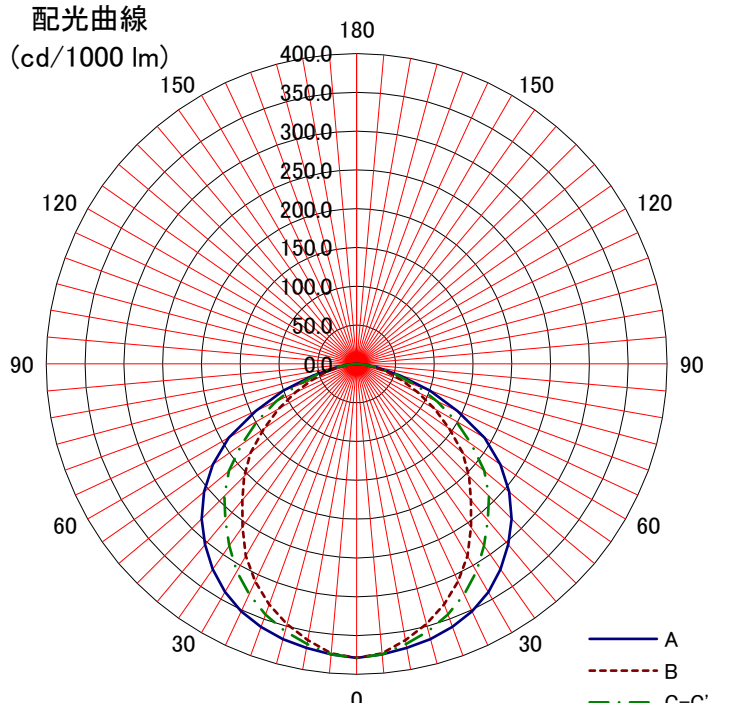


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
形式: NLE454AL-JZ14A	室指数	固有照明率 S/H=1.0															
＜備考＞	0.6	0.60	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33		
	0.8	0.69	0.58	0.51	0.68	0.58	0.50	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43		
姿図 	1	0.76	0.66	0.58	0.74	0.65	0.58	0.52	0.63	0.57	0.52	0.62	0.56	0.52	0.50		
	1.25	0.82	0.72	0.65	0.80	0.71	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.57		
	1.5	0.86	0.78	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.65	0.73	0.69	0.65	0.62		
	2	0.91	0.85	0.79	0.90	0.84	0.78	0.74	0.82	0.77	0.73	0.80	0.76	0.73	0.70		
	2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75		
	3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.78		
	4	1.00	0.96	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.83		
光源形式 -	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86		
	7	1.04	1.01	0.99	1.03	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.90		
器具光束 7,870 lm	10	1.06	1.04	1.03	1.04	1.03	1.01	1.00	1.01	0.99	0.98	0.99	0.98	0.97	0.94		
	器具効率 Ft= 100%																
上方光束 Fu= 0%		単体照度分布(初期値) 															
下方光束 Fd= 100%																	
最大取付間隔																	
A-A 1.34 H																	
B-B 1.14 H																	
保守率	良	0.86															
	中	0.81															
	否	0.72															
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 															
	A-0	B-B	C-0	A'-0	C'-0												
0	379	379	379														
10	372	361	366														
20	361	330	344														
30	339	286	309														
40	304	229	263														
50	256	178	215														
60	190	116	148														
70	101	62	84														
80	27	23	28														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	