
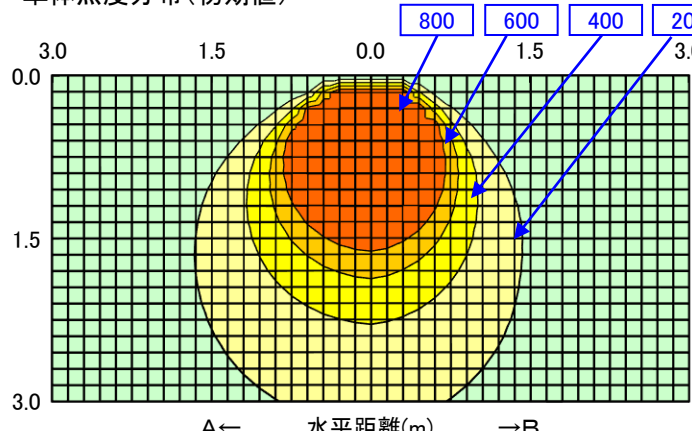
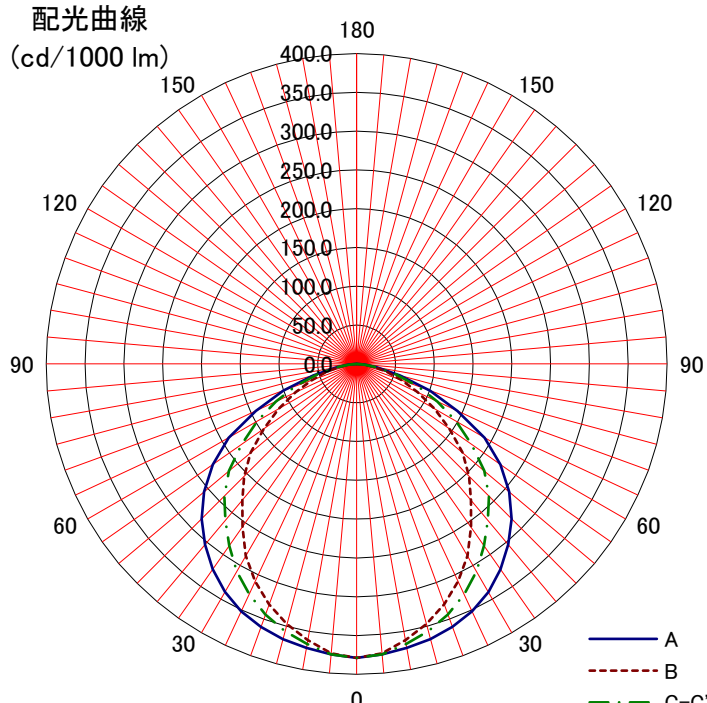


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%																																																																																																																							
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																							
		床	10%														0%																																																																																																																						
形式: NLE454AWW-JZL14A	室指数	固有照明率 S/H=1.0																																																																																																																																					
<備考> 姿図 	0.6	0.60	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33																																																																																																																								
	0.8	0.69	0.58	0.51	0.68	0.58	0.50	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43																																																																																																																								
	1	0.76	0.66	0.58	0.74	0.65	0.58	0.52	0.63	0.57	0.52	0.62	0.56	0.52	0.50																																																																																																																								
	1.25	0.82	0.72	0.65	0.80	0.71	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.57																																																																																																																								
	1.5	0.86	0.78	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.65	0.73	0.69	0.65	0.62																																																																																																																								
	2	0.91	0.85	0.79	0.90	0.84	0.78	0.74	0.82	0.77	0.73	0.80	0.76	0.73	0.70																																																																																																																								
	2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75																																																																																																																								
光源形式	3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.78																																																																																																																								
	4	1.00	0.96	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.83																																																																																																																								
器具光束 5,540 lm	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86																																																																																																																								
	7	1.04	1.01	0.99	1.03	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.90																																																																																																																								
	10	1.06	1.04	1.03	1.04	1.03	1.01	1.00	1.01	0.99	0.98	0.99	0.98	0.97	0.94																																																																																																																								
器具効率 Ft= 100%		単体照度分布(初期値)  800 600 400 200 3.0 1.5 0.0 1.5 3.0 0.0 1.5 3.0 水平距離(m) 0-200 200-400 400-600 600-800 800-1000																																																																																																																																					
上方光束 Fu= 0%																																																																																																																																							
下方光束 Fd= 100%																																																																																																																																							
最大取付間隔		配光曲線 (cd/1000 lm)  180 150 120 90 60 30 0 400.0 350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0 A B C-C'																																																																																																																																					
A-A 1.34 H																																																																																																																																							
B-B 1.14 H																																																																																																																																							
保守率																																																																																																																																							
良	0.86	光度 (cd/1000 lm) <table><thead><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr></thead><tbody><tr><td>0</td><td>379</td><td>379</td><td>379</td><td></td><td></td></tr><tr><td>10</td><td>372</td><td>361</td><td>366</td><td></td><td></td></tr><tr><td>20</td><td>361</td><td>330</td><td>344</td><td></td><td></td></tr><tr><td>30</td><td>339</td><td>286</td><td>309</td><td></td><td></td></tr><tr><td>40</td><td>304</td><td>229</td><td>263</td><td></td><td></td></tr><tr><td>50</td><td>256</td><td>178</td><td>215</td><td></td><td></td></tr><tr><td>60</td><td>190</td><td>116</td><td>148</td><td></td><td></td></tr><tr><td>70</td><td>101</td><td>62</td><td>84</td><td></td><td></td></tr><tr><td>80</td><td>27</td><td>23</td><td>28</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>															A-0	B-B	C-0	A'-0	C'-0	0	379	379	379			10	372	361	366			20	361	330	344			30	339	286	309			40	304	229	263			50	256	178	215			60	190	116	148			70	101	62	84			80	27	23	28			90						100						110						120						130						140						150						160						170						180					
	A-0															B-B	C-0	A'-0	C'-0																																																																																																																				
0	379															379	379																																																																																																																						
10	372															361	366																																																																																																																						
20	361	330	344																																																																																																																																				
30	339	286	309																																																																																																																																				
40	304	229	263																																																																																																																																				
50	256	178	215																																																																																																																																				
60	190	116	148																																																																																																																																				
70	101	62	84																																																																																																																																				
80	27	23	28																																																																																																																																				
90																																																																																																																																							
100																																																																																																																																							
110																																																																																																																																							
120																																																																																																																																							
130																																																																																																																																							
140																																																																																																																																							
150																																																																																																																																							
160																																																																																																																																							
170																																																																																																																																							
180																																																																																																																																							
中	0.81																																																																																																																																						
否	0.72																																																																																																																																						