

日立照明器具 照明特性

形式： HNM11103V-EN1		反 射 率	天井	80%			70%				50%			30%			0%		
姿図 			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
光源 品名 蛍光ランプ 形式 FLR110HEX-N/A/100 光束 9,220 lm		0.6	0.48	0.35	0.28	0.45	0.34	0.26	0.21	0.30	0.24	0.19	0.27	0.22	0.18	0.14			
		0.8	0.56	0.44	0.36	0.53	0.42	0.34	0.29	0.37	0.31	0.26	0.33	0.28	0.24	0.19			
		1	0.62	0.50	0.42	0.58	0.48	0.40	0.34	0.43	0.36	0.31	0.38	0.33	0.28	0.23			
		1.25	0.67	0.57	0.48	0.63	0.54	0.46	0.40	0.48	0.42	0.37	0.43	0.38	0.33	0.27			
		1.5	0.71	0.61	0.54	0.67	0.58	0.51	0.46	0.52	0.46	0.42	0.47	0.42	0.38	0.31			
光源 品名 蛍光ランプ 形式 FLR110HEX-N/A/100 光束 9,220 lm		2	0.77	0.68	0.61	0.73	0.65	0.58	0.53	0.58	0.53	0.48	0.52	0.48	0.44	0.36			
		2.5	0.81	0.73	0.66	0.76	0.69	0.63	0.58	0.62	0.57	0.53	0.56	0.52	0.48	0.40			
		3	0.83	0.76	0.70	0.79	0.72	0.67	0.62	0.65	0.61	0.57	0.58	0.55	0.51	0.43			
		4	0.86	0.81	0.76	0.82	0.77	0.72	0.68	0.69	0.65	0.62	0.62	0.59	0.56	0.47			
		5	0.89	0.84	0.79	0.84	0.80	0.76	0.72	0.72	0.69	0.66	0.65	0.62	0.60	0.50			
光源 品名 蛍光ランプ 形式 FLR110HEX-N/A/100 光束 9,220 lm		7	0.91	0.88	0.84	0.87	0.84	0.80	0.78	0.76	0.73	0.71	0.68	0.66	0.64	0.54			
		10	0.94	0.91	0.88	0.89	0.87	0.84	0.82	0.79	0.77	0.75	0.71	0.69	0.68	0.57			

器具効率 $F_t = 97.5\%$
 上方光束 $F_u = 29.9\%$
 下方光束 $F_d = 67.5\%$

配光分類

BZ-

最大取付間隔

A-A 1.68 H


B-B 1.28 H

保守率	良	0.74
	中	0.70
	否	0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	140	140	140
10	142	138	140
20	145	131	139
30	151	119	135
40	155	103	133
50	155	84	127
60	149	61	118
70	137	37	103
80	124	14	86
90	117	1	77
100	118		80
110	120		86
120	119		75
130	96		43
140	53		1
150	1		
160			
170			
180			

単体照度分布(初期)

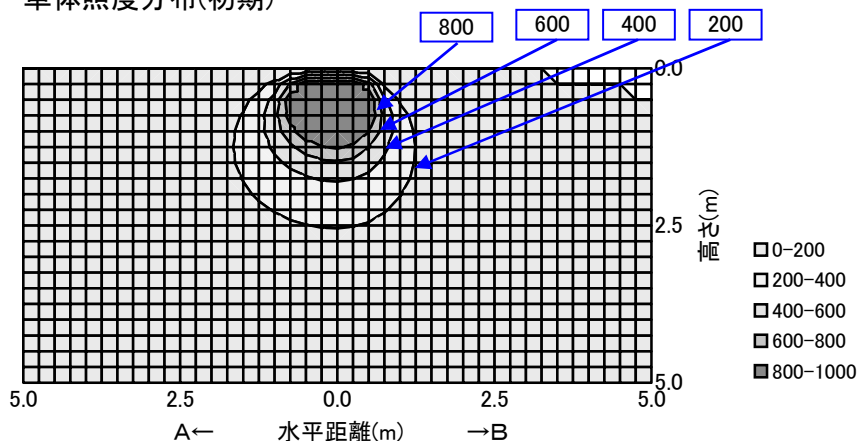

配光曲線

