

## 日立照明器具 照明特性

| 形式：NM2203V-G                                                                      |            | 反<br>射<br>率 | 天井          | 80%  |      |      | 70%  |      |      |      | 50%  |      |      | 30%  |      |      | 0% |
|-----------------------------------------------------------------------------------|------------|-------------|-------------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|
|                                                                                   |            |             | 壁           | 70%  | 50%  | 30%  | 70%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0% |
|                                                                                   |            |             | 床           | 10%  |      |      |      |      |      |      |      |      |      |      |      |      |    |
|                                                                                   |            | 室指数         | 照明率 S/H=1.0 |      |      |      |      |      |      |      |      |      |      |      |      |      |    |
|  |            | 0.6         | 0.46        | 0.35 | 0.27 | 0.44 | 0.33 | 0.27 | 0.22 | 0.31 | 0.25 | 0.21 | 0.29 | 0.23 | 0.20 | 0.17 |    |
|                                                                                   |            | 0.8         | 0.54        | 0.43 | 0.35 | 0.52 | 0.41 | 0.34 | 0.29 | 0.38 | 0.32 | 0.27 | 0.35 | 0.30 | 0.26 | 0.22 |    |
|                                                                                   |            | 1           | 0.60        | 0.49 | 0.41 | 0.57 | 0.47 | 0.40 | 0.34 | 0.43 | 0.37 | 0.33 | 0.40 | 0.35 | 0.31 | 0.26 |    |
|                                                                                   |            | 1.25        | 0.65        | 0.55 | 0.47 | 0.62 | 0.53 | 0.46 | 0.40 | 0.49 | 0.43 | 0.38 | 0.45 | 0.40 | 0.36 | 0.31 |    |
|                                                                                   |            | 1.5         | 0.69        | 0.59 | 0.52 | 0.66 | 0.57 | 0.51 | 0.45 | 0.53 | 0.47 | 0.43 | 0.49 | 0.44 | 0.40 | 0.35 |    |
|                                                                                   |            | 2           | 0.74        | 0.66 | 0.59 | 0.71 | 0.63 | 0.57 | 0.52 | 0.59 | 0.54 | 0.49 | 0.54 | 0.50 | 0.46 | 0.41 |    |
|                                                                                   |            | 2.5         | 0.77        | 0.70 | 0.64 | 0.74 | 0.68 | 0.62 | 0.57 | 0.62 | 0.58 | 0.54 | 0.58 | 0.54 | 0.51 | 0.45 |    |
|                                                                                   |            | 3           | 0.80        | 0.73 | 0.68 | 0.76 | 0.70 | 0.66 | 0.61 | 0.65 | 0.61 | 0.57 | 0.60 | 0.57 | 0.54 | 0.47 |    |
| 光 源                                                                               |            | 4           | 0.83        | 0.77 | 0.73 | 0.79 | 0.75 | 0.70 | 0.67 | 0.69 | 0.66 | 0.62 | 0.64 | 0.61 | 0.58 | 0.52 |    |
| 品名                                                                                | 蛍光ランプ      | 5           | 0.85        | 0.80 | 0.76 | 0.81 | 0.77 | 0.74 | 0.70 | 0.72 | 0.69 | 0.66 | 0.67 | 0.64 | 0.62 | 0.55 |    |
| 形式                                                                                | FL20SSW/18 | 7           | 0.87        | 0.84 | 0.81 | 0.84 | 0.81 | 0.78 | 0.76 | 0.75 | 0.73 | 0.71 | 0.70 | 0.68 | 0.66 | 0.59 |    |
| 光束                                                                                | 2,460 lm   | 10          | 0.89        | 0.87 | 0.85 | 0.86 | 0.84 | 0.82 | 0.80 | 0.78 | 0.76 | 0.75 | 0.73 | 0.71 | 0.70 | 0.63 |    |

器具効率 Ft= 90.7%

上方光束 Fu= 18.5%

下方光束 Fd= 72.1%

配光分類

BZ-

最大取付間隔

A-A 1.50 H


B-B 1.28 H

| 保守率 | 良 | 0.74 |
|-----|---|------|
|     | 中 | 0.70 |
|     | 否 | 0.62 |

光度 (cd/1000 lm)

|     | A-0 | B-B | C-0 |
|-----|-----|-----|-----|
| 0   | 175 | 175 | 175 |
| 10  | 175 | 173 | 174 |
| 20  | 172 | 163 | 168 |
| 30  | 171 | 149 | 159 |
| 40  | 166 | 130 | 149 |
| 50  | 154 | 105 | 136 |
| 60  | 146 | 78  | 115 |
| 70  | 138 | 49  | 103 |
| 80  | 114 | 21  | 85  |
| 90  | 83  | 1   | 56  |
| 100 | 76  |     | 48  |
| 110 | 64  |     | 42  |
| 120 | 59  |     | 45  |
| 130 | 59  |     | 31  |
| 140 | 38  |     | 14  |
| 150 | 14  |     | 1   |
| 160 | 1   |     |     |
| 170 | 1   |     |     |
| 180 | 1   |     |     |

単体照度分布(初期)

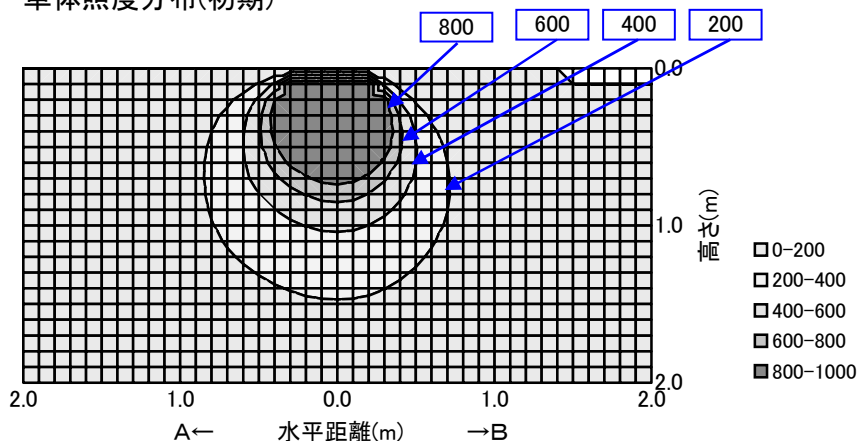

配光曲線

