

日立照明器具 照明特性


名称:直管形LED搭載器具		反 射 率	天井	80%			70%				50%			30%			0%
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
形式:NME11203-JL24AF		室指数	照明率 S/H=1.0														
<備考>		0.6	0.51	0.39	0.31	0.49	0.38	0.30	0.25	0.36	0.29	0.24	0.34	0.28	0.23	0.21	
		0.8	0.60	0.48	0.40	0.58	0.47	0.39	0.33	0.44	0.37	0.32	0.41	0.35	0.31	0.27	
姿図 		1	0.66	0.55	0.46	0.63	0.53	0.45	0.39	0.50	0.43	0.38	0.46	0.41	0.36	0.32	
		1.25	0.72	0.61	0.53	0.69	0.59	0.52	0.46	0.55	0.49	0.44	0.52	0.46	0.42	0.38	
		1.5	0.76	0.66	0.58	0.73	0.64	0.57	0.51	0.60	0.54	0.49	0.56	0.51	0.47	0.42	
		2	0.81	0.73	0.66	0.78	0.71	0.64	0.59	0.66	0.61	0.56	0.62	0.58	0.54	0.49	
		2.5	0.85	0.78	0.71	0.82	0.75	0.69	0.64	0.70	0.66	0.61	0.66	0.62	0.58	0.53	
		3	0.87	0.81	0.75	0.84	0.78	0.73	0.68	0.73	0.69	0.65	0.69	0.65	0.62	0.56	
		4	0.91	0.85	0.80	0.88	0.83	0.78	0.74	0.78	0.74	0.71	0.73	0.70	0.67	0.61	
品名	直管形LEDランプ	5	0.93	0.88	0.84	0.90	0.86	0.82	0.78	0.81	0.77	0.74	0.76	0.73	0.71	0.64	
形式	LDK110SS-N/34/45F	7	0.96	0.92	0.89	0.93	0.89	0.86	0.84	0.84	0.82	0.79	0.79	0.77	0.75	0.69	
光束	9,000 lm	10	0.98	0.95	0.93	0.95	0.93	0.90	0.88	0.87	0.86	0.84	0.82	0.81	0.80	0.73	

器具効率 F_t : 97.9%
 上方光束 F_u : 14.8%
 下方光束 F_d : 83.1%

最大取付間隔		
A-A	1.38	H
B-B	1.30	H
保守率	良	0.88
	中	0.86
	否	0.81

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	222	222	222		
10	217	221	221		
20	211	210	212		
30	201	192	197		
40	189	167	178		
50	174	137	155		
60	157	101	130		
70	140	61	105		
80	121	25	83		
90	92		56		
100	69		39		
110	56		32		
120	44		25		
130	35		21		
140	26		15		
150	17				
160	10				
170					
180					

単体照度分布 (初期値)

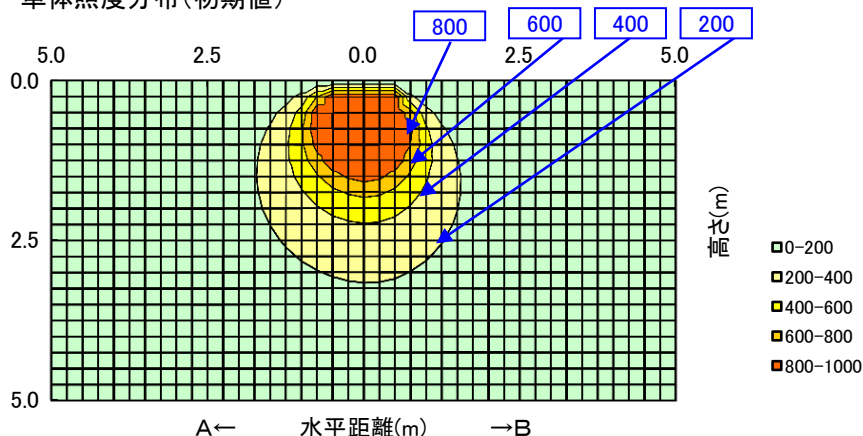

配光曲線
(cd/1000 lm)

