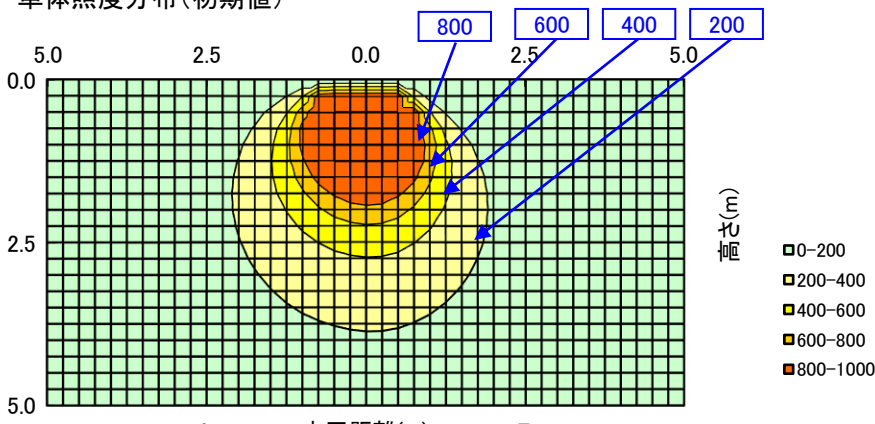
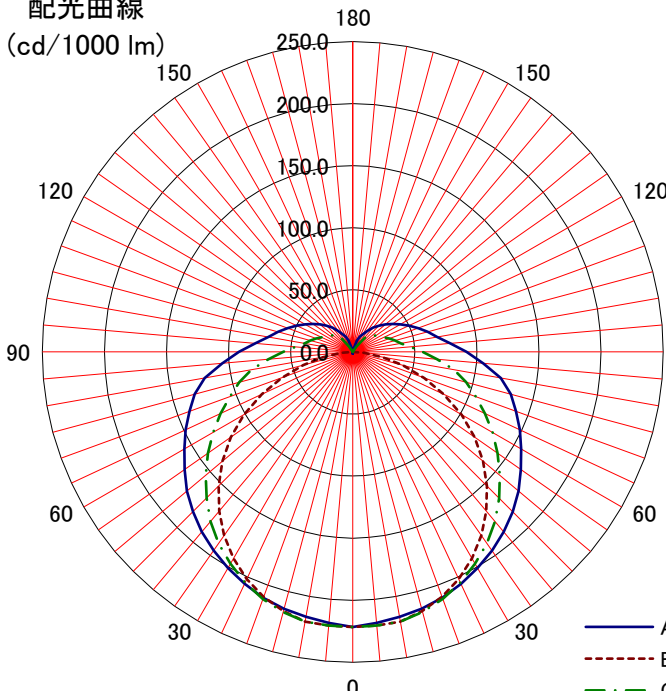


日立照明器具 照明特性																
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: NME11203-JM24AE	室指数	照明率 S/H=1.0														
<備考>	0.6	0.51	0.39	0.31	0.49	0.38	0.30	0.25	0.36	0.29	0.24	0.34	0.28	0.23	0.21	
	0.8	0.60	0.48	0.40	0.58	0.47	0.39	0.33	0.44	0.37	0.32	0.41	0.35	0.31	0.27	
姿図 	1	0.66	0.55	0.46	0.63	0.53	0.45	0.39	0.50	0.43	0.38	0.46	0.41	0.36	0.32	
	1.25	0.72	0.61	0.53	0.69	0.59	0.52	0.46	0.55	0.49	0.44	0.52	0.46	0.42	0.38	
	1.5	0.76	0.66	0.58	0.73	0.64	0.57	0.51	0.60	0.54	0.49	0.56	0.51	0.47	0.42	
	2	0.81	0.73	0.66	0.78	0.71	0.64	0.59	0.66	0.61	0.56	0.62	0.58	0.54	0.49	
	2.5	0.85	0.78	0.71	0.82	0.75	0.69	0.64	0.70	0.66	0.61	0.66	0.62	0.58	0.53	
	3	0.87	0.81	0.75	0.84	0.78	0.73	0.68	0.73	0.69	0.65	0.69	0.65	0.62	0.56	
光源	4	0.91	0.85	0.80	0.88	0.83	0.78	0.74	0.78	0.74	0.71	0.73	0.70	0.67	0.61	
品名 直管形LEDランプ	5	0.93	0.88	0.84	0.90	0.86	0.82	0.78	0.81	0.77	0.74	0.76	0.73	0.71	0.64	
形式 LDK110SS-D/42/67NE	7	0.96	0.92	0.89	0.93	0.89	0.86	0.84	0.84	0.82	0.79	0.79	0.77	0.75	0.69	
光束 13,460 lm	10	0.98	0.95	0.93	0.95	0.93	0.90	0.88	0.87	0.86	0.84	0.82	0.81	0.80	0.73	
器具効率 Ft= 97.9%		単体照度分布(初期値) 														
上方光束 Fu= 14.8%																
下方光束 Fd= 83.1%																
最大取付間隔		(m)														
A-A 1.38 H																
B-B 1.30 H																
保守率	良 0.88															
	中 0.86															
	否 0.81															
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 														
	A-0	B-B	C-0	A'-0	C'-0											
0	222	222	222													
10	217	221	221													
20	211	210	212													
30	201	192	197													
40	189	167	178													
50	174	137	155													
60	157	101	130													
70	140	61	105													
80	121	25	83													
90	92		56													
100	69		39													
110	56		32													
120	44		25													
130	35		21													
140	26		15													
150	17															
160	10															
170																
180																