


日立照明器具 照明特性

形式： NME11203-X24A		反 射 率	天井	80%			70%				50%			30%			0%	
姿図 			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
品名	LED直管ランプ		0.6	0.52	0.40	0.32	0.50	0.38	0.31	0.26	0.36	0.29	0.25	0.34	0.28	0.24	0.21	
			0.8	0.61	0.49	0.40	0.58	0.47	0.40	0.34	0.44	0.38	0.32	0.42	0.36	0.31	0.28	
			1	0.67	0.55	0.47	0.64	0.54	0.46	0.40	0.50	0.44	0.38	0.47	0.41	0.37	0.33	
			1.25	0.73	0.62	0.54	0.70	0.60	0.52	0.47	0.56	0.50	0.45	0.53	0.47	0.43	0.38	
			1.5	0.77	0.67	0.59	0.74	0.65	0.58	0.52	0.61	0.55	0.50	0.57	0.52	0.48	0.43	
			2	0.83	0.74	0.67	0.80	0.72	0.65	0.60	0.67	0.62	0.57	0.63	0.59	0.55	0.49	
			2.5	0.86	0.79	0.72	0.83	0.76	0.70	0.65	0.72	0.67	0.62	0.67	0.63	0.59	0.54	
			3	0.89	0.82	0.76	0.86	0.79	0.74	0.69	0.75	0.70	0.66	0.70	0.66	0.63	0.57	
光源			4	0.92	0.86	0.82	0.89	0.84	0.79	0.75	0.79	0.75	0.72	0.74	0.71	0.68	0.62	
品名	LED直管ランプ		5	0.94	0.90	0.85	0.91	0.87	0.83	0.79	0.82	0.79	0.75	0.77	0.74	0.72	0.65	
形式	LDK110SS-N/55/69		7	0.97	0.93	0.90	0.94	0.91	0.88	0.85	0.86	0.83	0.81	0.81	0.79	0.77	0.70	
器具光束	13,510 lm		10	0.99	0.97	0.94	0.96	0.94	0.92	0.90	0.89	0.87	0.85	0.84	0.82	0.81	0.74	

器具効率 Ft= 100.0%		
上方光束 Fu= 15.6%		
下方光束 Fd= 84.4%		
配光分類		
BZ-		
最大取付間隔		
A-A	1.38	H
B-B	1.30	H
保守率	良	0.86
	中	0.81
	否	0.72

単体照度分布(初期)

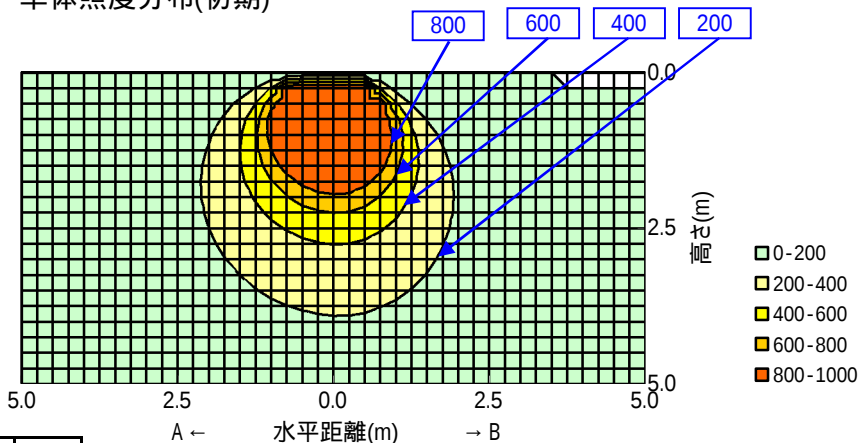

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	225	225	225		
10	220	224	224		
20	214	213	215		
30	204	195	200		
40	192	170	181		
50	177	139	157		
60	159	103	132		
70	142	62	107		
80	123	25	84		
90	93		57		
100	70		40		
110	57		32		
120	45		25		
130	35		21		
140	26		15		
150	17				
160	10				
170					
180					

配光曲線

