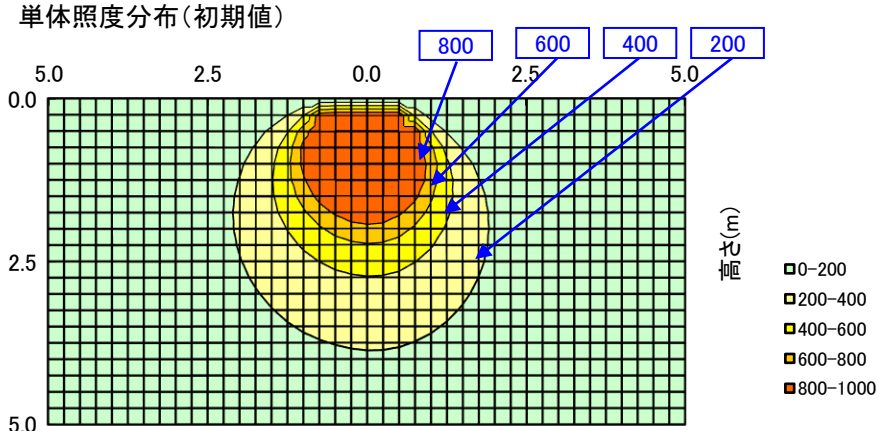
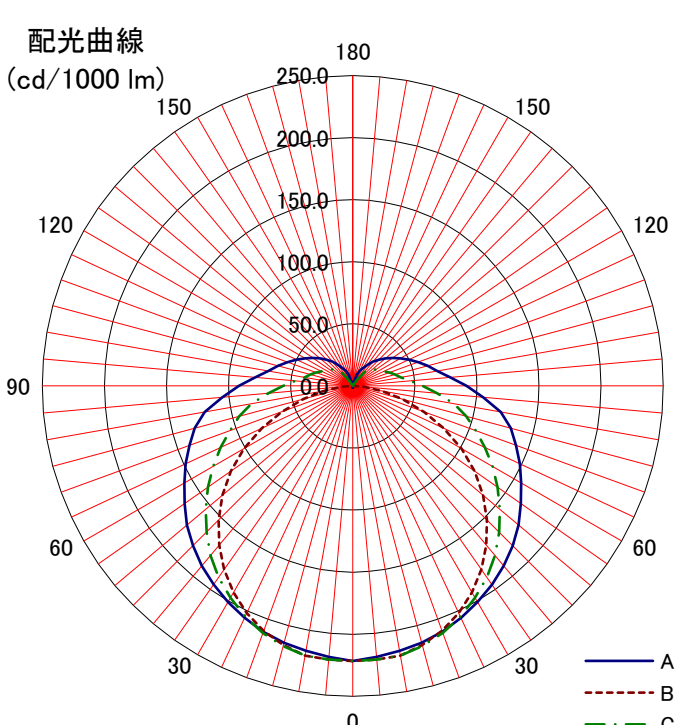


日立照明器具 照明特性																	
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
形式: NME11203-XM24E	室指数	照明率 S/H=1.0															
<備考>	0.6	0.51	0.39	0.31	0.49	0.38	0.30	0.25	0.36	0.29	0.24	0.34	0.28	0.23	0.21		
	0.8	0.60	0.48	0.40	0.58	0.47	0.39	0.33	0.44	0.37	0.32	0.41	0.35	0.31	0.27		
姿図 	1	0.66	0.55	0.46	0.63	0.53	0.45	0.39	0.50	0.43	0.38	0.46	0.41	0.36	0.32		
	1.25	0.72	0.61	0.53	0.69	0.59	0.52	0.46	0.55	0.49	0.44	0.52	0.46	0.42	0.38		
	1.5	0.76	0.66	0.58	0.73	0.64	0.57	0.51	0.60	0.54	0.49	0.56	0.51	0.47	0.42		
	2	0.81	0.73	0.66	0.78	0.71	0.64	0.59	0.66	0.61	0.56	0.62	0.58	0.54	0.49		
	2.5	0.85	0.78	0.71	0.82	0.75	0.69	0.64	0.70	0.66	0.61	0.66	0.62	0.58	0.53		
	3	0.87	0.81	0.75	0.84	0.78	0.73	0.68	0.73	0.69	0.65	0.69	0.65	0.62	0.56		
光源	4	0.91	0.85	0.80	0.88	0.83	0.78	0.74	0.78	0.74	0.71	0.73	0.70	0.67	0.61		
	5	0.93	0.88	0.84	0.90	0.86	0.82	0.78	0.81	0.77	0.74	0.76	0.73	0.71	0.64		
品名 直管形LEDランプ	7	0.96	0.92	0.89	0.93	0.89	0.86	0.84	0.84	0.82	0.79	0.79	0.77	0.75	0.69		
形式 LDK110SS-D/42/67NE	10	0.98	0.95	0.93	0.95	0.93	0.90	0.88	0.87	0.86	0.84	0.82	0.81	0.80	0.73		
光束 13,460 lm																	
器具効率 Ft= 97.9%		単体照度分布(初期値) 															
上方光束 Fu= 14.8%																	
下方光束 Fd= 83.1%																	
最大取付間隔		配光曲線 (cd/1000 lm) 															
A-A 1.38 H																	
B-B 1.30 H																	
保守率	良																0.88
	中																0.86
	否																0.81
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	222	222	222														
10	217	221	221														
20	211	210	212														
30	201	192	197														
40	189	167	178														
50	174	137	155														
60	157	101	130														
70	140	61	105														
80	121	25	83														
90	92		56														
100	69		39														
110	56		32														
120	44		25														
130	35		21														
140	26		15														
150	17																
160	10																
170																	
180																	