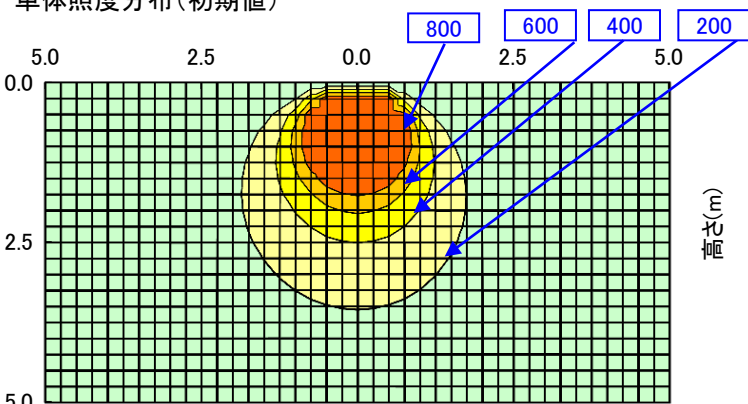
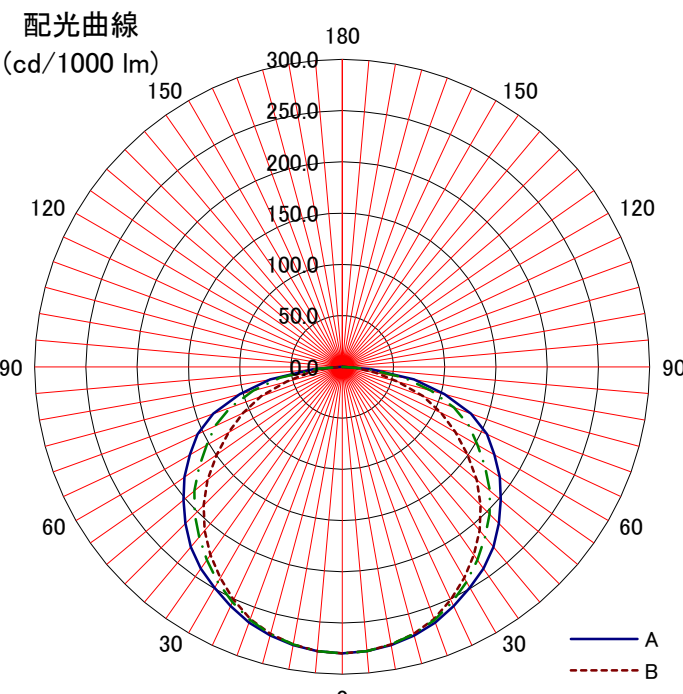


日立照明器具 照明特性

名称: 直管形LED搭載器具	天井	80%			70%				50%			30%			0%		
		反射率	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
形式: NME11220-JL24AF	室指数	照明率 S/H=1.0															
<備考>	0.6	0.52	0.40	0.33	0.50	0.40	0.33	0.28	0.39	0.32	0.27	0.38	0.32	0.27	0.25		
	0.8	0.60	0.49	0.42	0.59	0.49	0.41	0.36	0.47	0.41	0.36	0.46	0.40	0.36	0.34		
姿図 	1	0.66	0.56	0.48	0.65	0.55	0.48	0.43	0.53	0.47	0.42	0.52	0.46	0.42	0.40		
	1.25	0.72	0.62	0.55	0.70	0.61	0.55	0.49	0.60	0.54	0.49	0.58	0.53	0.48	0.46		
	1.5	0.76	0.67	0.61	0.74	0.66	0.60	0.55	0.64	0.59	0.54	0.63	0.58	0.54	0.51		
	2	0.81	0.74	0.68	0.80	0.73	0.68	0.63	0.71	0.66	0.62	0.69	0.65	0.61	0.59		
	2.5	0.85	0.78	0.73	0.83	0.77	0.72	0.68	0.75	0.71	0.67	0.73	0.70	0.66	0.64		
	3	0.87	0.82	0.77	0.86	0.80	0.76	0.72	0.78	0.74	0.71	0.76	0.73	0.70	0.67		
	4	0.90	0.86	0.82	0.89	0.85	0.81	0.77	0.82	0.79	0.76	0.80	0.78	0.75	0.73		
光源	4	0.90	0.86	0.82	0.89	0.85	0.81	0.77	0.82	0.79	0.76	0.80	0.78	0.75	0.73		
品名 直管形LEDランプ	5	0.92	0.88	0.85	0.91	0.87	0.84	0.81	0.85	0.82	0.80	0.83	0.81	0.79	0.76		
形式 LDK110SS-N/34/45F	7	0.95	0.92	0.89	0.93	0.91	0.88	0.86	0.89	0.87	0.85	0.87	0.85	0.83	0.81		
光束 9,000 lm	10	0.96	0.95	0.93	0.95	0.93	0.92	0.90	0.91	0.90	0.89	0.89	0.88	0.87	0.84		
器具効率 Ft= 92.3%		単体照度分布 (初期値) 															
上方光束 Fu= 0.0%																	
下方光束 Fd= 92.3%																	
最大取付間隔																	
A-A 1.34 H																	
B-B 1.28 H																	
保守率	良	0.86	配光曲線 (cd/1000 lm) 														
	中	0.81															
	否	0.72															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	280	280	280														
10	276	275	275														
20	266	262	263														
30	249	238	243														
40	230	209	217														
50	202	172	188														
60	172	127	152														
70	134	84	116														
80	71	33	62														
90	2	2	2														
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	