


日立照明器具 照明特性

形式: NME11220-X24A	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
	室指数		照明率 S/H=1.0													
姿図 	0.6	0.56	0.43	0.36	0.55	0.43	0.35	0.30	0.42	0.35	0.30	0.41	0.34	0.30	0.28	
	0.8	0.65	0.53	0.45	0.64	0.53	0.45	0.39	0.51	0.44	0.39	0.50	0.44	0.39	0.36	
	1	0.72	0.60	0.52	0.70	0.60	0.52	0.46	0.58	0.51	0.46	0.56	0.50	0.45	0.43	
	1.25	0.78	0.67	0.60	0.76	0.66	0.59	0.53	0.65	0.58	0.53	0.63	0.57	0.52	0.50	
	1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.59	0.70	0.64	0.59	0.68	0.63	0.58	0.56	
	2	0.88	0.80	0.74	0.87	0.79	0.73	0.68	0.77	0.72	0.67	0.75	0.70	0.67	0.64	
	2.5	0.92	0.85	0.79	0.90	0.84	0.78	0.74	0.82	0.77	0.73	0.79	0.75	0.72	0.69	
	3	0.94	0.88	0.83	0.93	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.73	
	4	0.98	0.93	0.88	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.81	0.79	
	5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.85	0.82	
光源	4	0.98	0.93	0.88	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.81	0.79	
品名 LED直管ランプ	5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.85	0.82	
形式 LDK110SS-N/55/69	7	1.02	0.99	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.87	
器具光束 12,730 lm	10	1.04	1.02	1.00	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.97	0.95	0.94	0.91	

器具効率 Ft=	100.0%
上方光束 Fu=	0.1%
下方光束 Fd=	99.9%
配光分類	BZ-
最大取付間隔	
A-A	1.34 H
B-B	1.28 H
保守率	良 0.86
	中 0.81
	否 0.72

単体照度分布(初期)

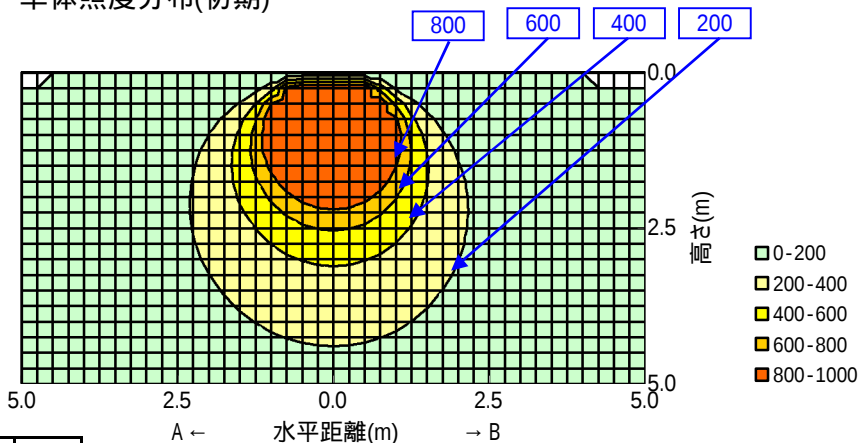

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	303	303	303		
10	299	298	298		
20	288	284	285		
30	270	258	263		
40	249	226	235		
50	219	186	204		
60	186	138	165		
70	145	91	126		
80	77	36	67		
90	2	2	2		
100					
110					
120					
130					
140					
150					
160					
170					
180					

配光曲線

