


日立照明器具 照明特性

名称:直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式:NME11220-XM24E	室指数	照明率 S/H=1.0														
<備考>	0.6	0.52	0.40	0.33	0.50	0.40	0.33	0.28	0.39	0.32	0.27	0.38	0.32	0.27	0.25	
	0.8	0.60	0.49	0.42	0.59	0.49	0.41	0.36	0.47	0.41	0.36	0.46	0.40	0.36	0.34	
	1	0.66	0.56	0.48	0.65	0.55	0.48	0.43	0.53	0.47	0.42	0.52	0.46	0.42	0.40	
	1.25	0.72	0.62	0.55	0.70	0.61	0.55	0.49	0.60	0.54	0.49	0.58	0.53	0.48	0.46	
	1.5	0.76	0.67	0.61	0.74	0.66	0.60	0.55	0.64	0.59	0.54	0.63	0.58	0.54	0.51	
	2	0.81	0.74	0.68	0.80	0.73	0.68	0.63	0.71	0.66	0.62	0.69	0.65	0.61	0.59	
	2.5	0.85	0.78	0.73	0.83	0.77	0.72	0.68	0.75	0.71	0.67	0.73	0.70	0.66	0.64	
姿図 	3	0.87	0.82	0.77	0.86	0.80	0.76	0.72	0.78	0.74	0.71	0.76	0.73	0.70	0.67	
	4	0.90	0.86	0.82	0.89	0.85	0.81	0.77	0.82	0.79	0.76	0.80	0.78	0.75	0.73	
	5	0.92	0.88	0.85	0.91	0.87	0.84	0.81	0.85	0.82	0.80	0.83	0.81	0.79	0.76	
	7	0.95	0.92	0.89	0.93	0.91	0.88	0.86	0.89	0.87	0.85	0.87	0.85	0.83	0.81	
	10	0.96	0.95	0.93	0.95	0.93	0.92	0.90	0.91	0.90	0.89	0.89	0.88	0.87	0.84	
	光源															
	品名:直管形LEDランプ															
形式:LDK110SS-N/42/69NE																
光束:13,900 lm																


器具効率 Ft= 92.3%					
上方光束 Fu= 0.0%					
下方光束 Fd= 92.3%					
最大取付間隔					
A-A		1.34 H			
B-B		1.28 H			
保守率	良	0.86			
	中	0.81			
	否	0.72			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	280	280	280		
10	276	275	275		
20	266	262	263		
30	249	238	243		
40	230	209	217		
50	202	172	188		
60	172	127	152		
70	134	84	116		
80	71	33	62		
90	2	2	2		
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布 (初期値)

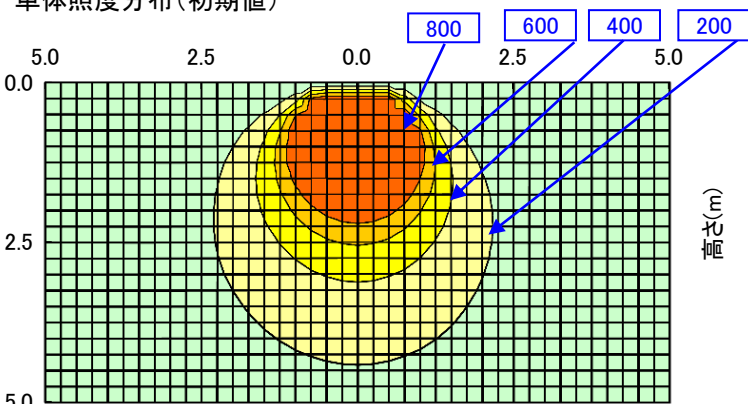

A← 水平距離(m) →B

配光曲線
(cd/1000 lm)

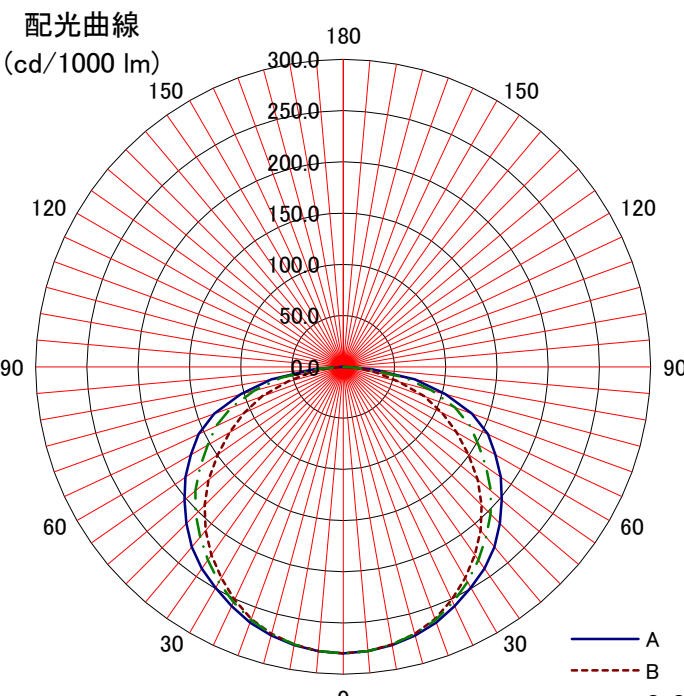

A
B
C-C'