
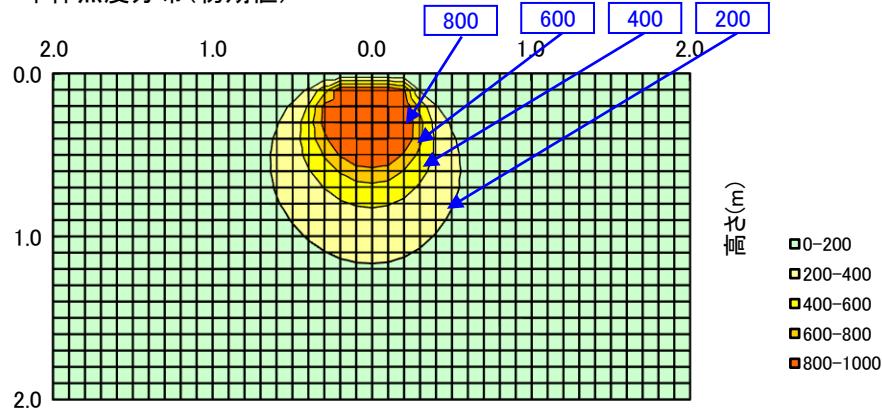


日立照明器具 照明特性

名称: 直管形LED搭載器具	反射率	天井	80%			70%			50%			30%			0%				
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%												0%				
形式: NME2103-J14AA		室指数 照明率 S/H=1.0																	
<備考>		0.6	0.51	0.39	0.31	0.49	0.37	0.30	0.25	0.35	0.28	0.24	0.33	0.27	0.23	0.20			
		0.8	0.59	0.48	0.39	0.57	0.46	0.38	0.33	0.43	0.36	0.31	0.40	0.34	0.30	0.26			
姿図		1	0.65	0.54	0.46	0.63	0.52	0.45	0.39	0.49	0.42	0.37	0.45	0.40	0.35	0.31			
		1.25	0.71	0.60	0.52	0.68	0.58	0.51	0.45	0.54	0.48	0.43	0.50	0.45	0.41	0.36			
		1.5	0.75	0.65	0.58	0.72	0.63	0.56	0.50	0.59	0.53	0.48	0.55	0.50	0.45	0.40			
		2	0.81	0.72	0.65	0.77	0.70	0.63	0.58	0.65	0.60	0.55	0.60	0.56	0.52	0.46			
		2.5	0.84	0.77	0.70	0.81	0.74	0.68	0.63	0.69	0.64	0.60	0.64	0.60	0.57	0.51			
		3	0.87	0.80	0.74	0.83	0.77	0.72	0.67	0.72	0.68	0.64	0.67	0.63	0.60	0.54			
光源		4	0.90	0.84	0.79	0.87	0.82	0.77	0.73	0.76	0.72	0.69	0.71	0.68	0.65	0.58			
品名	直管形LEDランプ	5	0.92	0.87	0.83	0.89	0.85	0.81	0.77	0.79	0.76	0.73	0.74	0.71	0.69	0.62			
形式	LDK20SS-D/10/12NA	7	0.95	0.91	0.88	0.92	0.88	0.85	0.82	0.83	0.80	0.78	0.77	0.75	0.73	0.66			
光束	1,260 lm	10	0.97	0.94	0.92	0.94	0.91	0.89	0.87	0.86	0.84	0.82	0.80	0.79	0.77	0.70			
器具効率 Ft= 97.8%		単体照度分布(初期値)																	
上方光束 Fu= 17.5%																			
下方光束 Fd= 80.3%																			
最大取付間隔																			
A-A 1.38 H																			
B-B 1.24 H																			
保守率	良	0.86																	
	中	0.81																	
	否	0.72																	
光度(cd/1000 lm)																			
	A-0	B-B	C-0	A'-0	C'-0														
0	215	215	215																
10	214	212	212																
20	208	197	204																
30	197	176	187																
40	187	154	169																
50	171	119	148																
60	156	90	126																
70	139	52	105																
80	119	22	83																
90	101		67																
100	84		53																
110	69		41																
120	53		35																
130	48		23																
140	24		1																
150	1		1																
160	1		1																
170	1		1																
180																			

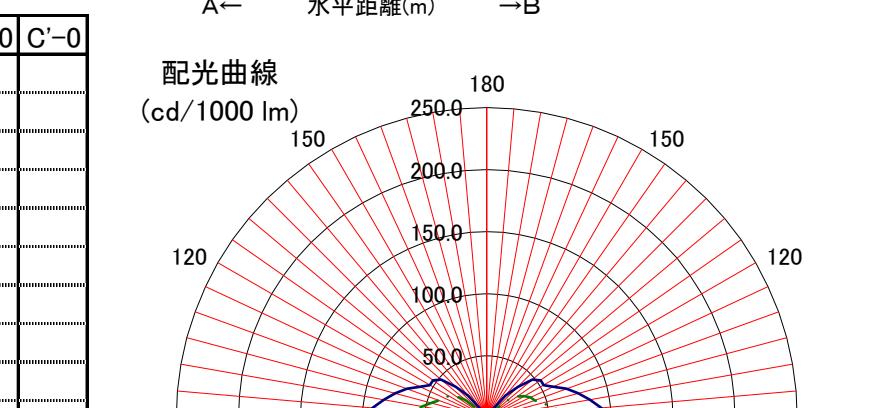