


日立照明器具 照明特性

名称: 直管形LED搭載器具	反射率	天井	80%			70%			50%			30%			0%					
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
		床	10%												0%					
形式: NME2203-J14AA		室指数 照明率 S/H=1.0																		
<備考>		0.6	0.49	0.38	0.30	0.47	0.36	0.29	0.24	0.34	0.28	0.23	0.32	0.26	0.22	0.19				
		0.8	0.58	0.46	0.38	0.55	0.45	0.37	0.32	0.42	0.35	0.31	0.39	0.34	0.29	0.26				
姿図		1	0.64	0.53	0.45	0.61	0.51	0.43	0.38	0.47	0.41	0.36	0.44	0.39	0.35	0.31				
		1.25	0.69	0.59	0.51	0.66	0.57	0.50	0.44	0.53	0.47	0.42	0.50	0.44	0.40	0.36				
		1.5	0.73	0.64	0.56	0.70	0.61	0.55	0.49	0.57	0.52	0.47	0.54	0.49	0.45	0.40				
		2	0.78	0.70	0.64	0.75	0.68	0.62	0.57	0.64	0.58	0.54	0.59	0.55	0.51	0.46				
		2.5	0.82	0.75	0.69	0.79	0.72	0.67	0.62	0.68	0.63	0.59	0.63	0.59	0.56	0.50				
		3	0.84	0.78	0.72	0.81	0.75	0.70	0.66	0.70	0.66	0.62	0.66	0.62	0.59	0.53				
光源		4	0.87	0.82	0.77	0.84	0.80	0.75	0.71	0.75	0.71	0.68	0.70	0.67	0.64	0.58				
品名	直管形LEDランプ	5	0.89	0.85	0.81	0.86	0.82	0.79	0.75	0.77	0.74	0.71	0.73	0.70	0.68	0.61				
形式	LDK20SS-D/10/12NA	7	0.92	0.89	0.86	0.89	0.86	0.83	0.81	0.81	0.79	0.76	0.76	0.74	0.72	0.66				
光束	2,520 lm	10	0.94	0.92	0.89	0.91	0.89	0.87	0.85	0.84	0.82	0.80	0.79	0.78	0.76	0.69				
器具効率 Ft= 94.5%		単体照度分布(初期値)																		
上方光束 Fu= 15.3%																				
下方光束 Fd= 79.2%																				
最大取付間隔																				
A-A 1.40 H																				
B-B 1.24 H																				
保守率	良	0.88																		
	中	0.86																		
	否	0.81																		
光度(cd/1000 lm)																				
	A-0	B-B	C-0	A'-0	C'-0															
0	212	212	212																	
10	210	207	209																	
20	205	195	201																	
30	196	176	187																	
40	185	149	170																	
50	171	122	150																	
60	154	88	126																	
70	138	50	104																	
80	117	21	84																	
90	81		53																	
100	68		43																	
110	59		36																	
120	47		30																	
130	39		24																	
140	28		10																	
150	8																			
160																				
170																				
180																				

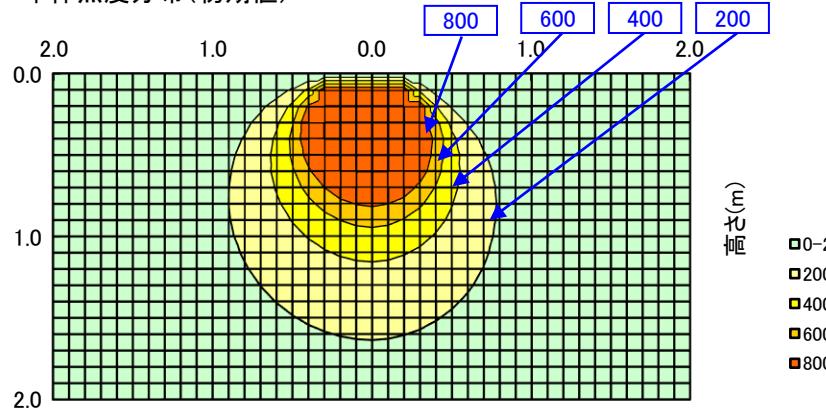