


日立照明器具 照明特性

名称: 直管形LED搭載器具	反射率	天井	80%			70%			50%			30%			0%				
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%												0%				
形式: NME2203-J14AA		室指数 照明率 S/H=1.0																	
<備考>		0.6	0.49	0.38	0.30	0.47	0.36	0.29	0.24	0.34	0.28	0.23	0.32	0.26	0.22	0.19			
		0.8	0.58	0.46	0.38	0.55	0.45	0.37	0.32	0.42	0.35	0.31	0.39	0.34	0.29	0.26			
姿図		1	0.64	0.53	0.45	0.61	0.51	0.43	0.38	0.47	0.41	0.36	0.44	0.39	0.35	0.31			
		1.25	0.69	0.59	0.51	0.66	0.57	0.50	0.44	0.53	0.47	0.42	0.50	0.44	0.40	0.36			
		1.5	0.73	0.64	0.56	0.70	0.61	0.55	0.49	0.57	0.52	0.47	0.54	0.49	0.45	0.40			
		2	0.78	0.70	0.64	0.75	0.68	0.62	0.57	0.64	0.58	0.54	0.59	0.55	0.51	0.46			
		2.5	0.82	0.75	0.69	0.79	0.72	0.67	0.62	0.68	0.63	0.59	0.63	0.59	0.56	0.50			
		3	0.84	0.78	0.72	0.81	0.75	0.70	0.66	0.70	0.66	0.62	0.66	0.62	0.59	0.53			
光源		4	0.87	0.82	0.77	0.84	0.80	0.75	0.71	0.75	0.71	0.68	0.70	0.67	0.64	0.58			
品名	直管形LEDランプ	5	0.89	0.85	0.81	0.86	0.82	0.79	0.75	0.77	0.74	0.71	0.73	0.70	0.68	0.61			
形式	LDK20SS-N/10/13NA	7	0.92	0.89	0.86	0.89	0.86	0.83	0.81	0.81	0.79	0.76	0.76	0.74	0.72	0.66			
光束	2,600 lm	10	0.94	0.92	0.89	0.91	0.89	0.87	0.85	0.84	0.82	0.80	0.79	0.78	0.76	0.69			
器具効率 Ft= 94.5%		単体照度分布(初期値)																	
上方光束 Fu= 15.3%																			
下方光束 Fd= 79.2%																			
最大取付間隔																			
A-A 1.40 H																			
B-B 1.24 H																			
保守率	良	0.88																	
	中	0.86																	
	否	0.81																	
光度(cd/1000 lm)																			
	A-0	B-B	C-0	A'-0	C'-0														
0	212	212	212																
10	210	207	209																
20	205	195	201																
30	196	176	187																
40	185	149	170																
50	171	122	150																
60	154	88	126																
70	138	50	104																
80	117	21	84																
90	81		53																
100	68		43																
110	59		36																
120	47		30																
130	39		24																
140	28		10																
150	8																		
160																			
170																			
180																			

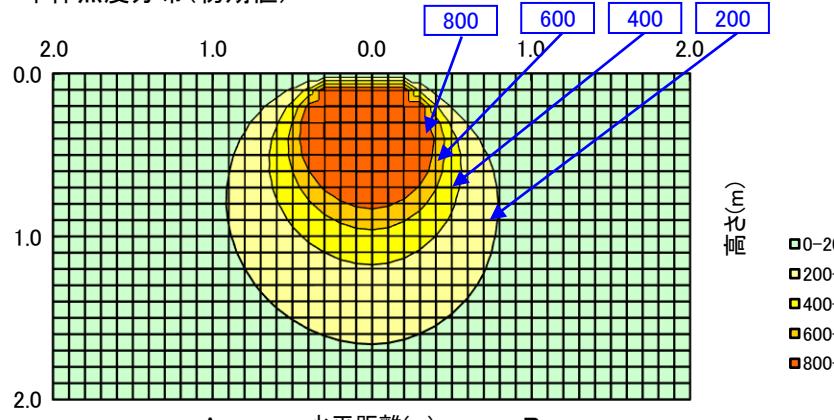