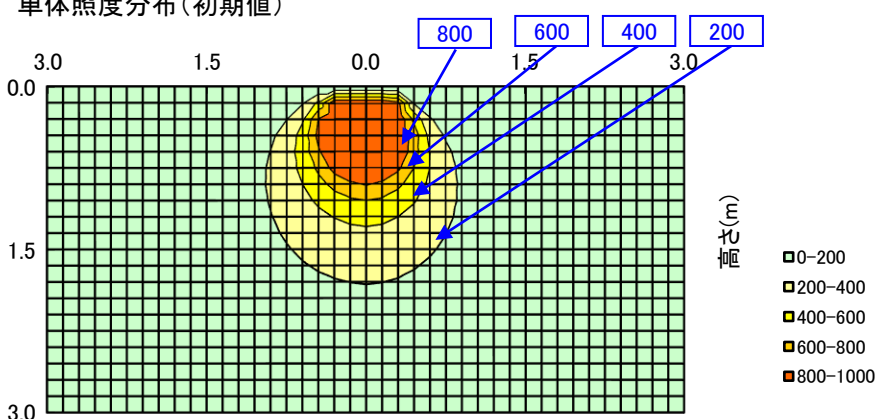
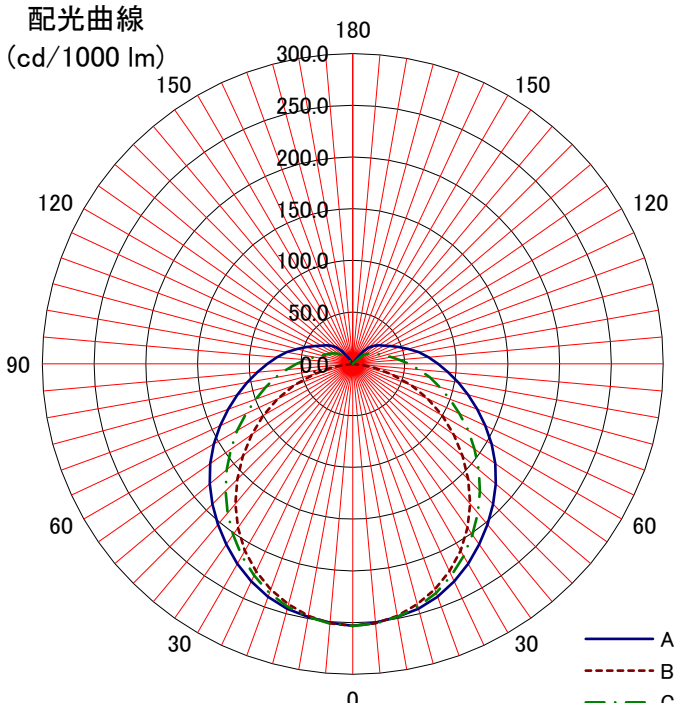
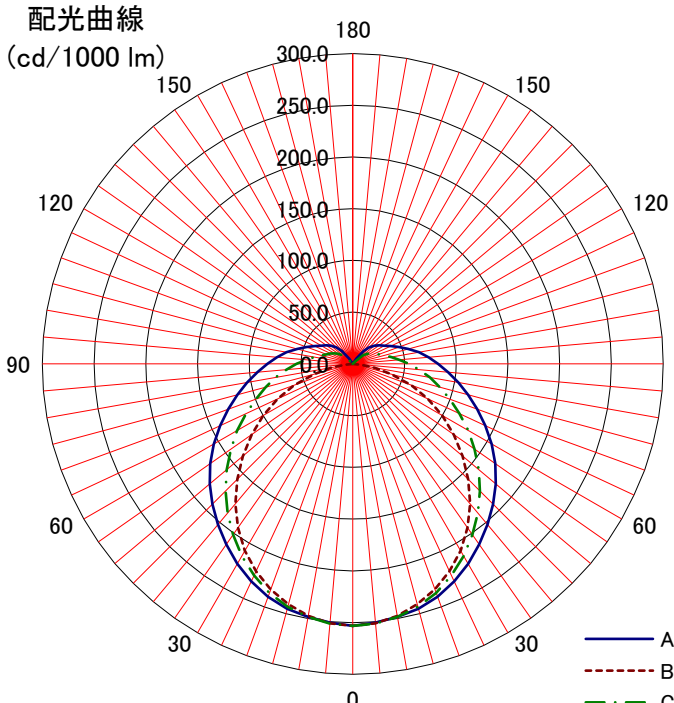


日立照明器具 照明特性																	
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
形式: NME4103-JM14AE	室指数	照明率 S/H=1.0															
<備考>	0.6	0.52	0.40	0.33	0.50	0.39	0.32	0.27	0.37	0.31	0.26	0.35	0.30	0.25	0.23		
	0.8	0.61	0.49	0.41	0.59	0.48	0.41	0.35	0.45	0.39	0.34	0.43	0.37	0.33	0.30		
姿図 	1	0.67	0.56	0.48	0.64	0.54	0.47	0.41	0.51	0.45	0.40	0.49	0.43	0.39	0.35		
	1.25	0.72	0.62	0.55	0.70	0.60	0.53	0.48	0.57	0.51	0.46	0.54	0.49	0.44	0.40		
	1.5	0.77	0.67	0.60	0.74	0.65	0.59	0.53	0.62	0.56	0.51	0.58	0.53	0.49	0.45		
	2	0.82	0.74	0.67	0.79	0.72	0.66	0.61	0.68	0.63	0.58	0.64	0.60	0.56	0.52		
	2.5	0.85	0.78	0.72	0.83	0.76	0.71	0.66	0.72	0.67	0.63	0.68	0.64	0.61	0.56		
	3	0.88	0.81	0.76	0.85	0.79	0.74	0.70	0.75	0.71	0.67	0.71	0.67	0.64	0.59		
光源	4	0.91	0.86	0.81	0.88	0.83	0.79	0.75	0.79	0.75	0.72	0.75	0.72	0.69	0.64		
品名 直管形LEDランプ	5	0.93	0.89	0.85	0.90	0.86	0.83	0.79	0.82	0.79	0.76	0.77	0.75	0.73	0.67		
形式 LDK40SS・D/17/26NE	7	0.96	0.92	0.89	0.93	0.90	0.87	0.84	0.85	0.83	0.81	0.81	0.79	0.77	0.71		
光束 2,620 lm	10	0.98	0.95	0.93	0.95	0.93	0.91	0.89	0.88	0.87	0.85	0.84	0.83	0.81	0.75		
器具効率 Ft= 96.9%		単体照度分布(初期値) 															
上方光束 Fu= 12.1%																	
下方光束 Fd= 84.9%																	
最大取付間隔		配光曲線 															
A-A 1.32 H																	
B-B 1.24 H																	
保守率	良																0.88
	中																0.86
	否																0.81
光度 (cd/1000 lm)																	配光曲線 
	A-0 253																
	B-B 253																
	C-0 253																
	A'-0																
	C'-0																
0	253																
10	248																
20	240																
30	223																
40	203																
50	180																
60	155																
70	128																
80	104																
90	82																
100	65																
110	48																
120	35																
130	27																
140	17																
150																	
160																	
170																	
180																	