


# 日立照明器具 照明特性

| 名称: 直管形LED搭載器具                                                                    | 反射率  | 天井   | 80%  |      |      | 70%  |      |      |      | 50%  |      |      | 30%  |      |      | 0% |
|-----------------------------------------------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|
|                                                                                   |      |      | 70%  | 50%  | 30%  | 70%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0% |
| 形式: NME4103-JM14AEOCP                                                             | 室指数  | 床    | 10%  |      |      |      |      |      |      |      |      |      |      |      |      |    |
| 照明率 S/H=1.0                                                                       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |    |
| 備考                                                                                | 0.6  | 0.52 | 0.40 | 0.33 | 0.50 | 0.39 | 0.32 | 0.27 | 0.37 | 0.31 | 0.26 | 0.35 | 0.30 | 0.25 | 0.23 |    |
| 姿図                                                                                | 0.8  | 0.61 | 0.49 | 0.41 | 0.59 | 0.48 | 0.41 | 0.35 | 0.45 | 0.39 | 0.34 | 0.43 | 0.37 | 0.33 | 0.30 |    |
|  | 1    | 0.67 | 0.56 | 0.48 | 0.64 | 0.54 | 0.47 | 0.41 | 0.51 | 0.45 | 0.40 | 0.49 | 0.43 | 0.39 | 0.35 |    |
|                                                                                   | 1.25 | 0.72 | 0.62 | 0.55 | 0.70 | 0.60 | 0.53 | 0.48 | 0.57 | 0.51 | 0.46 | 0.54 | 0.49 | 0.44 | 0.40 |    |
|                                                                                   | 1.5  | 0.77 | 0.67 | 0.60 | 0.74 | 0.65 | 0.59 | 0.53 | 0.62 | 0.56 | 0.51 | 0.58 | 0.53 | 0.49 | 0.45 |    |
|                                                                                   | 2    | 0.82 | 0.74 | 0.67 | 0.79 | 0.72 | 0.66 | 0.61 | 0.68 | 0.63 | 0.58 | 0.64 | 0.60 | 0.56 | 0.52 |    |
|                                                                                   | 2.5  | 0.85 | 0.78 | 0.72 | 0.83 | 0.76 | 0.71 | 0.66 | 0.72 | 0.67 | 0.63 | 0.68 | 0.64 | 0.61 | 0.56 |    |
|                                                                                   | 3    | 0.88 | 0.81 | 0.76 | 0.85 | 0.79 | 0.74 | 0.70 | 0.75 | 0.71 | 0.67 | 0.71 | 0.67 | 0.64 | 0.59 |    |
|                                                                                   | 4    | 0.91 | 0.86 | 0.81 | 0.88 | 0.83 | 0.79 | 0.75 | 0.79 | 0.75 | 0.72 | 0.75 | 0.72 | 0.69 | 0.64 |    |
| 光源                                                                                | 5    | 0.93 | 0.89 | 0.85 | 0.90 | 0.86 | 0.83 | 0.79 | 0.82 | 0.79 | 0.76 | 0.77 | 0.75 | 0.73 | 0.67 |    |
| 品名 直管形LEDランプ                                                                      | 7    | 0.96 | 0.92 | 0.89 | 0.93 | 0.90 | 0.87 | 0.84 | 0.85 | 0.83 | 0.81 | 0.81 | 0.79 | 0.77 | 0.71 |    |
| 形式 LDK40SS・D/15/23NE                                                              | 10   | 0.98 | 0.95 | 0.93 | 0.95 | 0.93 | 0.91 | 0.89 | 0.88 | 0.87 | 0.85 | 0.84 | 0.83 | 0.81 | 0.75 |    |
| 光束 2,330 lm                                                                       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |    |

器具効率 Ft= 96.9%

上方光束 Fu= 12.1%

下方光束 Fd= 84.9%

## 最大取付間隔


|     |      |   |
|-----|------|---|
| A-A | 1.32 | H |
| B-B | 1.24 | H |

|     |   |      |
|-----|---|------|
| 保守率 | 良 | 0.88 |
|     | 中 | 0.86 |
|     | 否 | 0.81 |

## 光度 (cd/1000 lm)

|     | A-0 | B-B | C-0 | A'-0 | C'-0 |
|-----|-----|-----|-----|------|------|
| 0   | 253 | 253 | 253 |      |      |
| 10  | 248 | 247 | 248 |      |      |
| 20  | 240 | 232 | 236 |      |      |
| 30  | 223 | 209 | 214 |      |      |
| 40  | 203 | 177 | 188 |      |      |
| 50  | 180 | 139 | 159 |      |      |
| 60  | 155 | 100 | 129 |      |      |
| 70  | 128 | 60  | 100 |      |      |
| 80  | 104 | 21  | 76  |      |      |
| 90  | 82  |     | 54  |      |      |
| 100 | 65  |     | 38  |      |      |
| 110 | 48  |     | 27  |      |      |
| 120 | 35  |     | 20  |      |      |
| 130 | 27  |     | 13  |      |      |
| 140 | 17  |     |     |      |      |
| 150 |     |     |     |      |      |
| 160 |     |     |     |      |      |
| 170 |     |     |     |      |      |
| 180 |     |     |     |      |      |

## 単体照度分布 (初期値)

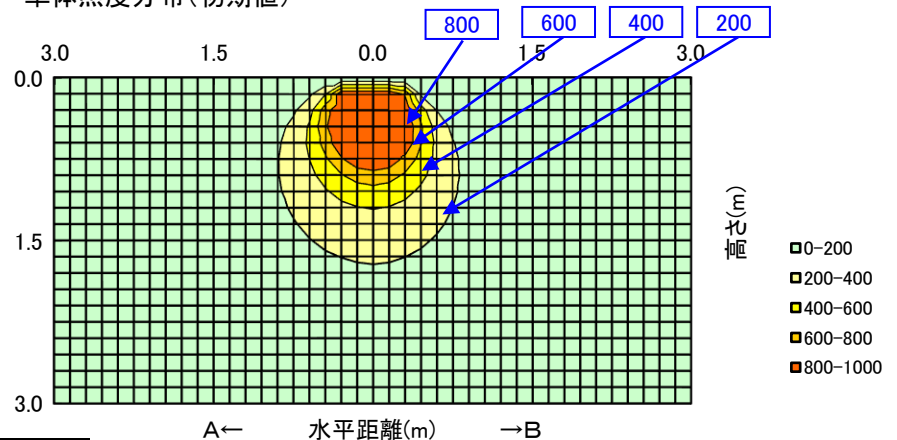

## 配光曲線 (cd/1000 lm)

