


日立照明器具 照明特性

形式: NME4103-X14A	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
	室指数		照明率 S/H=1.0													
姿図 	0.6		0.54	0.42	0.34	0.53	0.41	0.33	0.28	0.39	0.32	0.27	0.38	0.32	0.27	0.25
	0.8		0.64	0.51	0.43	0.62	0.50	0.42	0.37	0.48	0.41	0.36	0.47	0.40	0.35	0.33
	1		0.70	0.58	0.50	0.68	0.57	0.49	0.43	0.55	0.48	0.42	0.53	0.46	0.42	0.39
	1.25		0.76	0.65	0.57	0.73	0.63	0.56	0.50	0.61	0.54	0.49	0.59	0.53	0.48	0.45
	1.5		0.80	0.70	0.62	0.78	0.69	0.61	0.56	0.66	0.60	0.55	0.63	0.58	0.53	0.50
	2		0.86	0.77	0.70	0.84	0.76	0.69	0.64	0.73	0.67	0.63	0.70	0.65	0.61	0.58
	2.5		0.89	0.82	0.76	0.87	0.80	0.75	0.69	0.77	0.72	0.68	0.74	0.70	0.66	0.63
	3		0.92	0.85	0.80	0.90	0.84	0.78	0.74	0.80	0.76	0.72	0.77	0.74	0.70	0.66
	4		0.95	0.90	0.85	0.93	0.88	0.84	0.80	0.85	0.81	0.78	0.82	0.79	0.76	0.72
	5		0.98	0.93	0.89	0.95	0.91	0.87	0.84	0.88	0.85	0.82	0.85	0.82	0.80	0.76
光源	4		0.95	0.90	0.85	0.93	0.88	0.84	0.80	0.85	0.81	0.78	0.82	0.79	0.76	0.72
品名 LED直管ランプ	5		0.98	0.93	0.89	0.95	0.91	0.87	0.84	0.88	0.85	0.82	0.85	0.82	0.80	0.76
形式 LDK40SS-N/18/24	7		1.00	0.97	0.94	0.98	0.95	0.92	0.89	0.92	0.89	0.87	0.89	0.87	0.85	0.81
器具光束: 2,340 lm	10		1.03	1.00	0.98	1.01	0.98	0.96	0.94	0.95	0.93	0.91	0.92	0.90	0.89	0.85

器具効率 Ft= 100.0%		
上方光束 Fu= 16.7%		
下方光束 Fd= 83.3%		
配光分類		
BZ-		
最大取付間隔		
A-A	1.34	H
B-B	1.26	H
保守率	良	0.86
	中	0.81
	否	0.72

単体照度分布(初期)

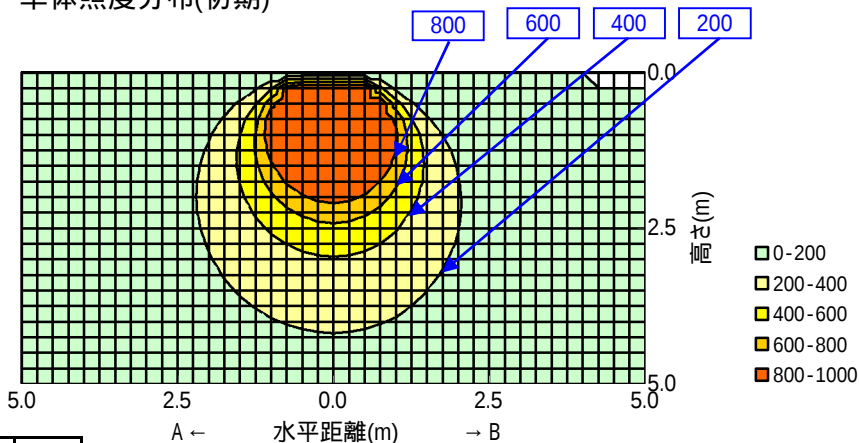

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	230	230	230		
10	227	226	226		
20	219	210	215		
30	209	188	199		
40	197	163	178		
50	179	125	154		
60	161	90	131		
70	141	56	107		
80	119	19	83		
90	99		66		
100	82		51		
110	65		39		
120	53		32		
130	42		22		
140	23		1		
150	1		1		
160	1		1		
170	1		1		
180					

配光曲線

