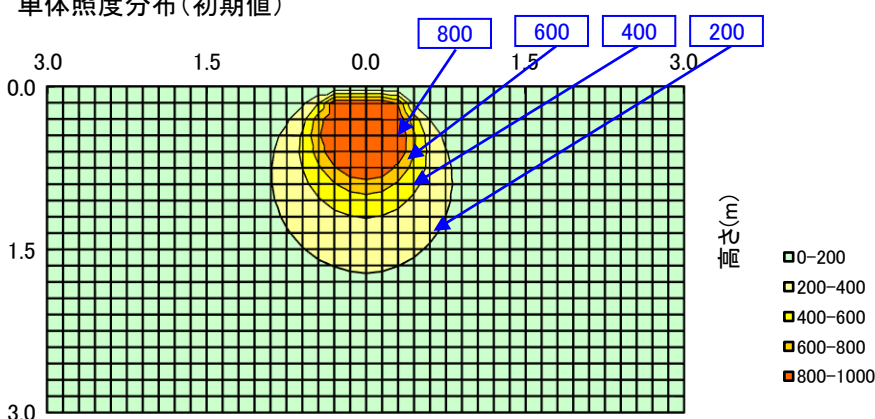
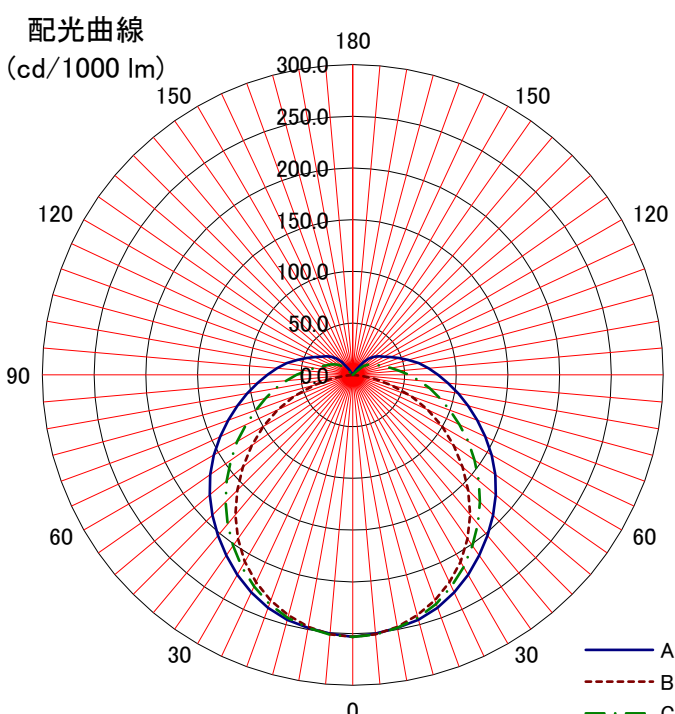


日立照明器具 照明特性																	
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
形式: NME4103-XM14E		床	10%														0%
<備考>	室指数	照明率 S/H=1.0															
		0.6	0.52	0.40	0.33	0.50	0.39	0.32	0.27	0.37	0.31	0.26	0.35	0.30	0.25	0.23	
姿図 	0.8	0.61	0.49	0.41	0.59	0.48	0.41	0.35	0.45	0.39	0.34	0.43	0.37	0.33	0.30		
	1	0.67	0.56	0.48	0.64	0.54	0.47	0.41	0.51	0.45	0.40	0.49	0.43	0.39	0.35		
	1.25	0.72	0.62	0.55	0.70	0.60	0.53	0.48	0.57	0.51	0.46	0.54	0.49	0.44	0.40		
	1.5	0.77	0.67	0.60	0.74	0.65	0.59	0.53	0.62	0.56	0.51	0.58	0.53	0.49	0.45		
	2	0.82	0.74	0.67	0.79	0.72	0.66	0.61	0.68	0.63	0.58	0.64	0.60	0.56	0.52		
	2.5	0.85	0.78	0.72	0.83	0.76	0.71	0.66	0.72	0.67	0.63	0.68	0.64	0.61	0.56		
	3	0.88	0.81	0.76	0.85	0.79	0.74	0.70	0.75	0.71	0.67	0.71	0.67	0.64	0.59		
光源	4	0.91	0.86	0.81	0.88	0.83	0.79	0.75	0.79	0.75	0.72	0.75	0.72	0.69	0.64		
品名 直管形LEDランプ	5	0.93	0.89	0.85	0.90	0.86	0.83	0.79	0.82	0.79	0.76	0.77	0.75	0.73	0.67		
形式 LDK40SS・D/15/23NE	7	0.96	0.92	0.89	0.93	0.90	0.87	0.84	0.85	0.83	0.81	0.81	0.79	0.77	0.71		
光束 2,330 lm	10	0.98	0.95	0.93	0.95	0.93	0.91	0.89	0.88	0.87	0.85	0.84	0.83	0.81	0.75		
器具効率 Ft= 96.9%		単体照度分布 (初期値) 															
上方光束 Fu= 12.1%																	
下方光束 Fd= 84.9%																	
最大取付間隔		配光曲線 (cd/1000 lm) 															
A-A 1.32 H																	
B-B 1.24 H																	
保守率	良 0.88 中 0.86 否 0.81																
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	253	253	253														
10	248	247	248														
20	240	232	236														
30	223	209	214														
40	203	177	188														
50	180	139	159														
60	155	100	129														
70	128	60	100														
80	104	21	76														
90	82		54														
100	65		38														
110	48		27														
120	35		20														
130	27		13														
140	17																
150																	
160																	
170																	
180																	