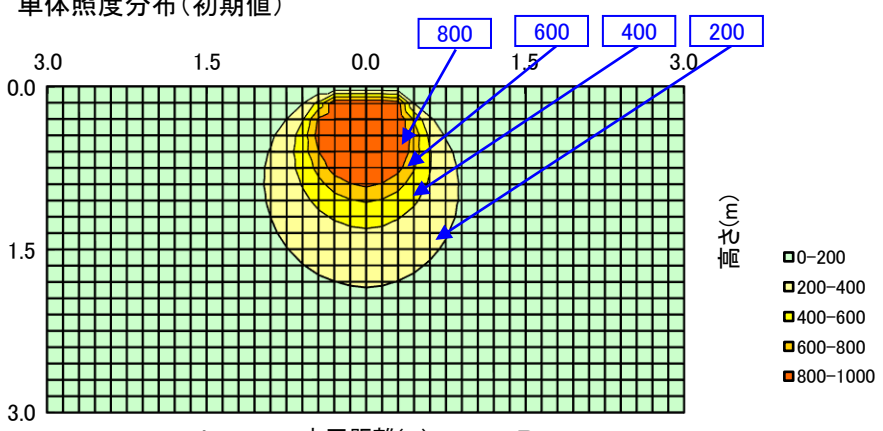
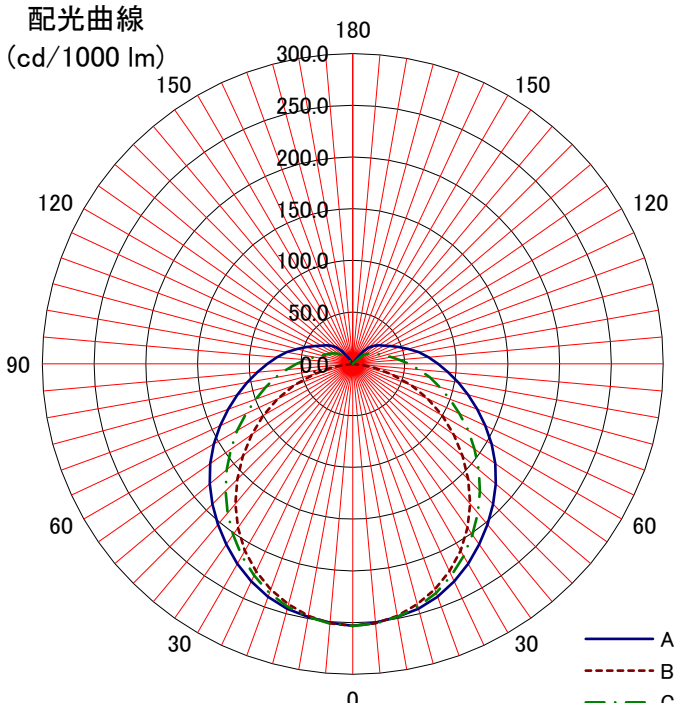
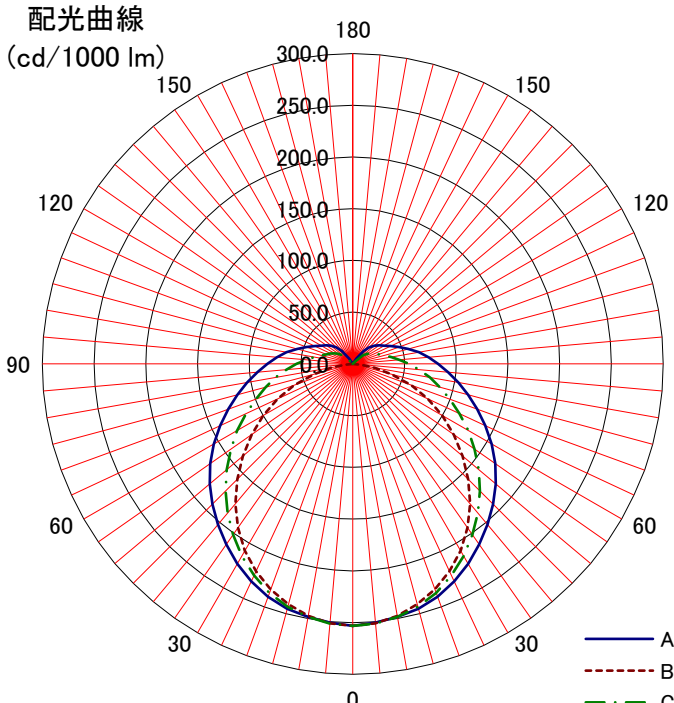


日立照明器具 照明特性																		
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%		
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
		床	10%														0%	
形式: NME4103-XM14E	室指数	照明率 S/H=1.0																
<備考>	0.6	0.52	0.40	0.33	0.50	0.39	0.32	0.27	0.37	0.31	0.26	0.35	0.30	0.25	0.23			
	0.8	0.61	0.49	0.41	0.59	0.48	0.41	0.35	0.45	0.39	0.34	0.43	0.37	0.33	0.30			
姿図 	1	0.67	0.56	0.48	0.64	0.54	0.47	0.41	0.51	0.45	0.40	0.49	0.43	0.39	0.35			
	1.25	0.72	0.62	0.55	0.70	0.60	0.53	0.48	0.57	0.51	0.46	0.54	0.49	0.44	0.40			
	1.5	0.77	0.67	0.60	0.74	0.65	0.59	0.53	0.62	0.56	0.51	0.58	0.53	0.49	0.45			
	2	0.82	0.74	0.67	0.79	0.72	0.66	0.61	0.68	0.63	0.58	0.64	0.60	0.56	0.52			
	2.5	0.85	0.78	0.72	0.83	0.76	0.71	0.66	0.72	0.67	0.63	0.68	0.64	0.61	0.56			
	3	0.88	0.81	0.76	0.85	0.79	0.74	0.70	0.75	0.71	0.67	0.71	0.67	0.64	0.59			
光源	4	0.91	0.86	0.81	0.88	0.83	0.79	0.75	0.79	0.75	0.72	0.75	0.72	0.69	0.64			
品名 直管形LEDランプ	5	0.93	0.89	0.85	0.90	0.86	0.83	0.79	0.82	0.79	0.76	0.77	0.75	0.73	0.67			
形式 LDK40SS・N/17/27NE	7	0.96	0.92	0.89	0.93	0.90	0.87	0.84	0.85	0.83	0.81	0.81	0.79	0.77	0.71			
光束 2,700 lm	10	0.98	0.95	0.93	0.95	0.93	0.91	0.89	0.88	0.87	0.85	0.84	0.83	0.81	0.75			
器具効率 Ft= 96.9%		単体照度分布(初期値) 																
上方光束 Fu= 12.1%																		
下方光束 Fd= 84.9%																		
最大取付間隔		配光曲線 (cd/1000 lm) 																
A-A 1.32 H																		
B-B 1.24 H																		
保守率	良																0.88	
	中																0.86	
	否																0.81	
光度 (cd/1000 lm)																	配光曲線 (cd/1000 lm) 	
	A-0 253 B-B 253 C-0 253																	
0	253	253	253															
10	248	247	248															
20	240	232	236															
30	223	209	214															
40	203	177	188															
50	180	139	159															
60	155	100	129															
70	128	60	100															
80	104	21	76															
90	82		54															
100	65		38															
110	48		27															
120	35		20															
130	27		13															
140	17																	
150																		
160																		
170																		
180																		