

日立照明器具 照明特性

形式: NME4105-J14A		天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
		室指数	照明率 S/H=1.0														
姿図 		0.6	0.52	0.39	0.31	0.50	0.38	0.30	0.25	0.35	0.29	0.24	0.33	0.27	0.23	0.20	
		0.8	0.61	0.48	0.40	0.58	0.47	0.39	0.33	0.44	0.37	0.32	0.41	0.35	0.30	0.26	
		1	0.67	0.55	0.47	0.64	0.53	0.45	0.39	0.49	0.43	0.37	0.46	0.40	0.36	0.31	
		1.25	0.72	0.61	0.53	0.69	0.59	0.52	0.46	0.55	0.49	0.44	0.51	0.46	0.41	0.36	
		1.5	0.77	0.67	0.59	0.73	0.64	0.57	0.51	0.60	0.54	0.49	0.56	0.50	0.46	0.41	
		2	0.82	0.74	0.67	0.79	0.71	0.65	0.59	0.66	0.61	0.56	0.62	0.57	0.53	0.47	
		2.5	0.86	0.78	0.72	0.83	0.76	0.70	0.65	0.70	0.65	0.61	0.65	0.61	0.58	0.52	
		3	0.88	0.82	0.76	0.85	0.79	0.73	0.69	0.73	0.69	0.65	0.68	0.65	0.61	0.55	
光源		4	0.92	0.86	0.81	0.88	0.83	0.79	0.74	0.78	0.74	0.70	0.72	0.69	0.66	0.59	
品名	LED直管ランプ	5	0.94	0.89	0.85	0.91	0.86	0.82	0.79	0.81	0.77	0.74	0.75	0.72	0.70	0.63	
形式	LDK40SS-N/18/24	7	0.97	0.93	0.90	0.94	0.90	0.87	0.84	0.84	0.82	0.79	0.79	0.77	0.75	0.67	
器具光束	2,310 lm	10	0.99	0.96	0.94	0.96	0.93	0.91	0.89	0.88	0.86	0.84	0.82	0.80	0.79	0.71	

器具効率 Ft= 100.0%

上方光束 Fu= 18.0%

下方光束 Fd= 82.0%

配光分類

BZ-

最大取付間隔

A-A 1.38 H

B-B 1.28 H

保守率

良 0.86

中 0.81

否 0.72

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	215	215	215		
10	213	212	212		
20	207	201	203		
30	197	183	190		
40	184	160	172		
50	171	128	152		
60	157	96	130		
70	138	58	108		
80	120	24	87		
90	102		68		
100	85		54		
110	69		43		
120	57		35		
130	45		23		
140	24		4		
150	3		1		
160	1		1		
170	1		1		
180					

単体照度分布(初期)

800 600 400 200

0.0 1.5 3.0 (m) 高さ

3.0 1.5 0.0 1.5 3.0 水平距離(m) A ← → B


0-200 200-400 400-600 600-800 800-1000

配光曲線

180 250.0 150 150 120 100.0 50.0 0.0 90 60 30 0

A B C-C'

単体照度分布(初期)

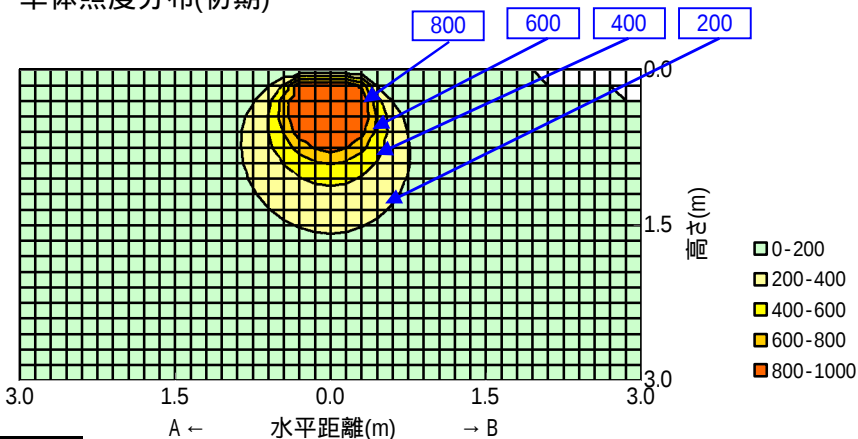

配光曲線

