
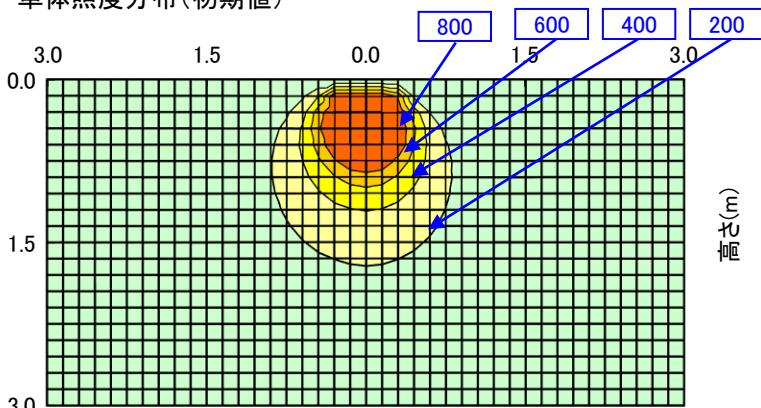
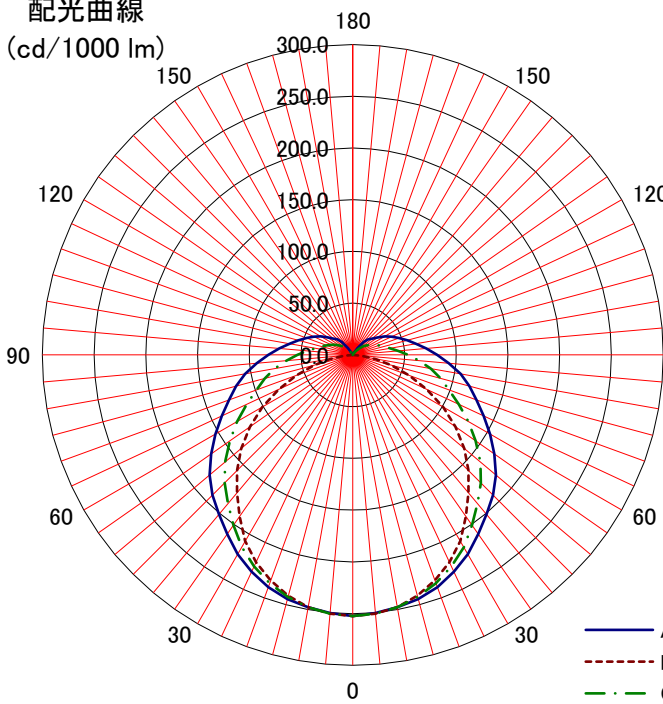


日立照明器具 照明特性																
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: NME4105-JM14AEOCP	室指数	照明率 S/H=1.0														
<備考>	0.6	0.52	0.40	0.33	0.50	0.39	0.32	0.27	0.37	0.31	0.26	0.35	0.30	0.25	0.23	
	0.8	0.61	0.49	0.41	0.59	0.48	0.41	0.35	0.45	0.39	0.34	0.43	0.37	0.33	0.30	
姿図 	1	0.67	0.56	0.48	0.64	0.54	0.47	0.41	0.51	0.45	0.40	0.49	0.43	0.38	0.35	
	1.25	0.72	0.62	0.54	0.70	0.60	0.53	0.48	0.57	0.51	0.46	0.54	0.49	0.44	0.40	
	1.5	0.76	0.67	0.60	0.74	0.65	0.58	0.53	0.62	0.56	0.51	0.58	0.53	0.49	0.45	
	2	0.82	0.74	0.67	0.79	0.72	0.66	0.61	0.68	0.63	0.58	0.64	0.60	0.56	0.51	
	2.5	0.85	0.78	0.72	0.83	0.76	0.71	0.66	0.72	0.67	0.63	0.68	0.64	0.61	0.56	
	3	0.88	0.81	0.76	0.85	0.79	0.74	0.70	0.75	0.71	0.67	0.71	0.67	0.64	0.59	
光源	4	0.91	0.86	0.81	0.88	0.83	0.79	0.75	0.79	0.75	0.72	0.75	0.72	0.69	0.64	
品名 直管形LEDランプ	5	0.93	0.89	0.85	0.90	0.86	0.83	0.79	0.82	0.79	0.76	0.77	0.75	0.73	0.67	
形式 LDK40SS・D/15/23NE	7	0.96	0.92	0.89	0.93	0.90	0.87	0.84	0.85	0.83	0.81	0.81	0.79	0.77	0.71	
光束 2,330 lm	10	0.98	0.95	0.93	0.95	0.93	0.91	0.89	0.88	0.87	0.85	0.84	0.82	0.81	0.75	
器具効率 Ft= 96.9%		単体照度分布(初期値)  (m) 中心 0-200 200-400 400-600 600-800 800-1000 A← 水平距離(m) →B														
上方光束 Fu= 12.1%																
下方光束 Fd= 84.8%																
最大取付間隔		配光曲線 (cd/1000 lm)  A B C-C'														
A-A 1.32 H																
B-B 1.24 H																
保守率 良 0.88 中 0.86 否 0.81																
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	252	252	252													
10	248	248	248													
20	239	232	235													
30	222	208	215													
40	201	174	187													
50	181	141	161													
60	153	101	129													
70	127	58	99													
80	106	22	77													
90	82		53													
100	62		37													
110	48		27													
120	36		19													
130	24		13													
140	17		5													
150	3															
160	1															
170	1															
180																