

日立照明器具 照明特性

名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: NME4105-JM14AEOCP	室指数	10%														
照明率 S/H=1.0																
照明率 S/H=1.0	0.6	0.52	0.40	0.33	0.50	0.39	0.32	0.27	0.37	0.31	0.26	0.35	0.30	0.25	0.23	
照明率 S/H=1.0	0.8	0.61	0.49	0.41	0.59	0.48	0.41	0.35	0.45	0.39	0.34	0.43	0.37	0.33	0.30	
照明率 S/H=1.0	1	0.67	0.56	0.48	0.64	0.54	0.47	0.41	0.51	0.45	0.40	0.49	0.43	0.38	0.35	
照明率 S/H=1.0	1.25	0.72	0.62	0.54	0.70	0.60	0.53	0.48	0.57	0.51	0.46	0.54	0.49	0.44	0.40	
照明率 S/H=1.0	1.5	0.76	0.67	0.60	0.74	0.65	0.58	0.53	0.62	0.56	0.51	0.58	0.53	0.49	0.45	
照明率 S/H=1.0	2	0.82	0.74	0.67	0.79	0.72	0.66	0.61	0.68	0.63	0.58	0.64	0.60	0.56	0.51	
照明率 S/H=1.0	2.5	0.85	0.78	0.72	0.83	0.76	0.71	0.66	0.72	0.67	0.63	0.68	0.64	0.61	0.56	
照明率 S/H=1.0	3	0.88	0.81	0.76	0.85	0.79	0.74	0.70	0.75	0.71	0.67	0.71	0.67	0.64	0.59	
照明率 S/H=1.0	4	0.91	0.86	0.81	0.88	0.83	0.79	0.75	0.79	0.75	0.72	0.75	0.72	0.69	0.64	
照明率 S/H=1.0	5	0.93	0.89	0.85	0.90	0.86	0.83	0.79	0.82	0.79	0.76	0.77	0.75	0.73	0.67	
照明率 S/H=1.0	7	0.96	0.92	0.89	0.93	0.90	0.87	0.84	0.85	0.83	0.81	0.81	0.79	0.77	0.71	
照明率 S/H=1.0	10	0.98	0.95	0.93	0.95	0.93	0.91	0.89	0.88	0.87	0.85	0.84	0.82	0.81	0.75	

器具効率 Ft= 96.9%

上方光束 Fu= 12.1%

下方光束 Fd= 84.8%

最大取付間隔


A-A	1.32	H
B-B	1.24	H

保守率	良	0.88
	中	0.86
	否	0.81

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	252	252	252		
10	248	248	248		
20	239	232	235		
30	222	208	215		
40	201	174	187		
50	181	141	161		
60	153	101	129		
70	127	58	99		
80	106	22	77		
90	82		53		
100	62		37		
110	48		27		
120	36		19		
130	24		13		
140	17		5		
150	3				
160	1				
170	1				
180					

単体照度分布 (初期値)

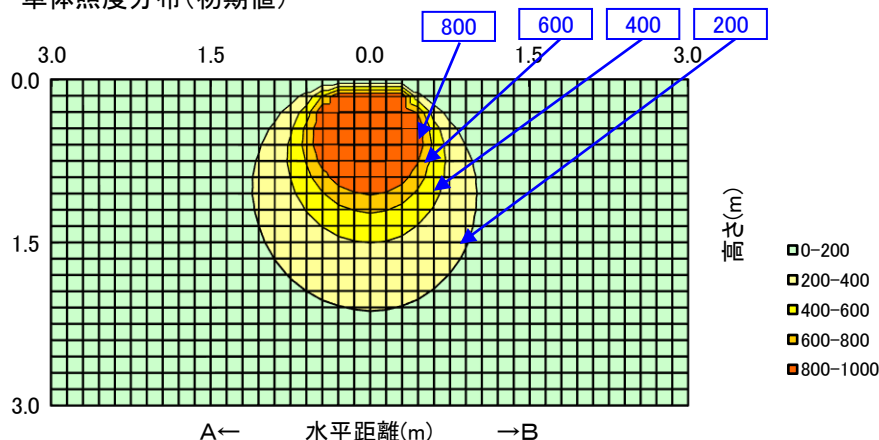

配光曲線 (cd/1000 lm)

