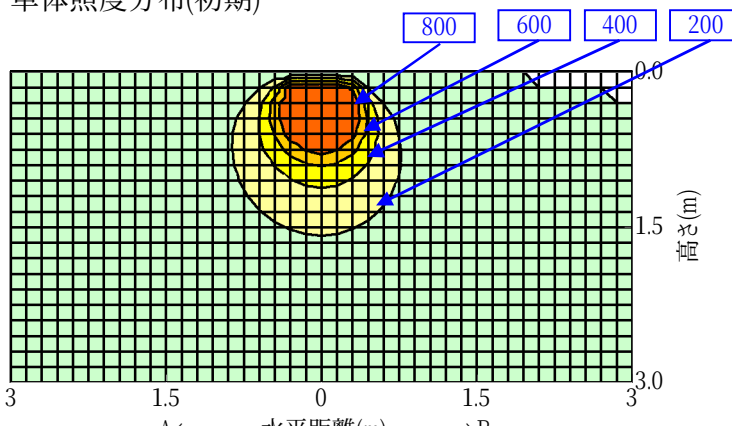
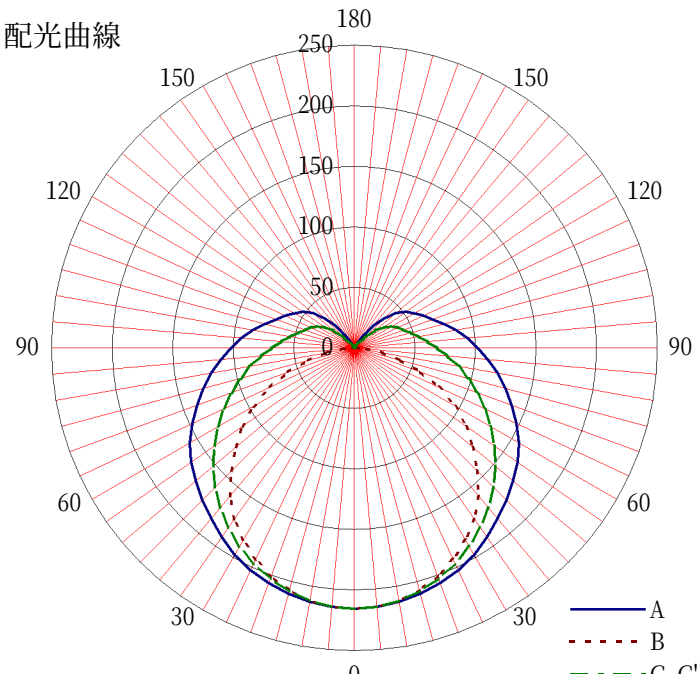


日立照明器具 照明特性

形式: NME4105-PK14		天井	80%			70%				50%			30%			0%	
		反射率	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
		室指数	照明率 S/H=1.0														
		0.6	0.52	0.39	0.31	0.50	0.38	0.30	0.25	0.35	0.29	0.24	0.33	0.27	0.23	0.20	
		0.8	0.61	0.48	0.40	0.58	0.47	0.39	0.33	0.44	0.37	0.32	0.41	0.35	0.30	0.26	
		1	0.67	0.55	0.47	0.64	0.53	0.45	0.39	0.49	0.43	0.37	0.46	0.40	0.36	0.31	
		1.25	0.72	0.61	0.53	0.69	0.59	0.52	0.46	0.55	0.49	0.44	0.51	0.46	0.41	0.36	
		1.5	0.77	0.67	0.59	0.73	0.64	0.57	0.51	0.60	0.54	0.49	0.56	0.50	0.46	0.41	
		2	0.82	0.74	0.67	0.79	0.71	0.65	0.59	0.66	0.61	0.56	0.62	0.57	0.53	0.47	
		2.5	0.86	0.78	0.72	0.83	0.76	0.70	0.65	0.70	0.65	0.61	0.65	0.61	0.58	0.52	
		3	0.88	0.82	0.76	0.85	0.79	0.73	0.69	0.73	0.69	0.65	0.68	0.65	0.61	0.55	
光源		4	0.92	0.86	0.81	0.88	0.83	0.79	0.74	0.78	0.74	0.70	0.72	0.69	0.66	0.59	
品名	LED直管ランプ	5	0.94	0.89	0.85	0.91	0.86	0.82	0.79	0.81	0.77	0.74	0.75	0.72	0.70	0.63	
形式	LDK40SS N/26L/24	7	0.97	0.93	0.90	0.94	0.90	0.87	0.84	0.84	0.82	0.79	0.79	0.77	0.75	0.67	
器具光束	2,310 lm	10	0.99	0.96	0.94	0.96	0.93	0.91	0.89	0.88	0.86	0.84	0.82	0.80	0.79	0.71	

器具効率 Ft= 100.0%			単体照度分布(初期) 							
上方光束 Fu= 18.0%										
下方光束 Fd= 82.0%										
配光分類										
BZ-										
最大取付間隔										
A-A 1.38 H										
B-B 1.28 H										
保守率	良	0.78								
	中	0.74								
	否	0.66								
光度 (cd/1000 lm)										
	A-0	B-B	C-0	A'-0	C'-0	配光曲線 				
0	215	215	215							
10	213	212	212							
20	207	201	203							
30	197	183	190							
40	184	160	172							
50	171	128	152							
60	157	96	130							
70	138	58	108							
80	120	24	87							
90	102		68							
100	85		54							
110	69		43							
120	57		35							
130	45		23							
140	24		4							
150	3		1							
160	1		1							
170	1		1							
180										