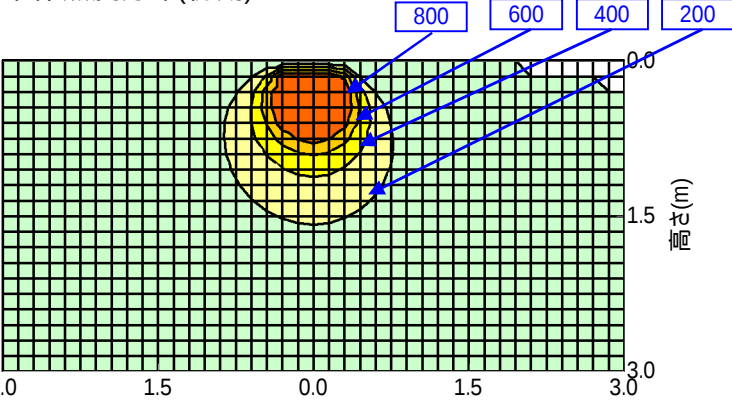
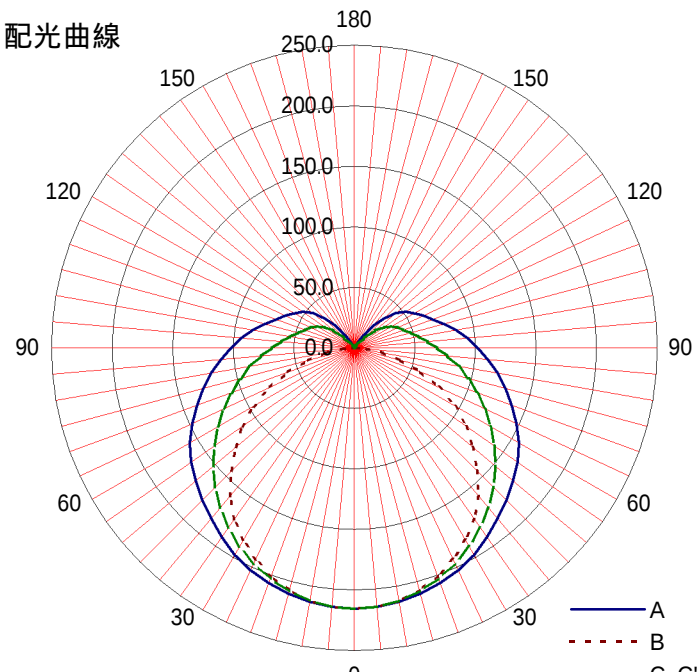


日立照明器具 照明特性

形式: NME4105-X14A		天井	80%			70%				50%			30%			0%																																																																																																																								
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
		床	10%														0%																																																																																																																							
		室指数	照明率 S/H=1.0																																																																																																																																					
		0.6	0.52	0.39	0.31	0.50	0.38	0.30	0.25	0.35	0.29	0.24	0.33	0.27	0.23	0.20																																																																																																																								
		0.8	0.61	0.48	0.40	0.58	0.47	0.39	0.33	0.44	0.37	0.32	0.41	0.35	0.30	0.26																																																																																																																								
		1	0.67	0.55	0.47	0.64	0.53	0.45	0.39	0.49	0.43	0.37	0.46	0.40	0.36	0.31																																																																																																																								
		1.25	0.72	0.61	0.53	0.69	0.59	0.52	0.46	0.55	0.49	0.44	0.51	0.46	0.41	0.36																																																																																																																								
		1.5	0.77	0.67	0.59	0.73	0.64	0.57	0.51	0.60	0.54	0.49	0.56	0.50	0.46	0.41																																																																																																																								
		2	0.82	0.74	0.67	0.79	0.71	0.65	0.59	0.66	0.61	0.56	0.62	0.57	0.53	0.47																																																																																																																								
		2.5	0.86	0.78	0.72	0.83	0.76	0.70	0.65	0.70	0.65	0.61	0.65	0.61	0.58	0.52																																																																																																																								
		3	0.88	0.82	0.76	0.85	0.79	0.73	0.69	0.73	0.69	0.65	0.68	0.65	0.61	0.55																																																																																																																								
光源		4	0.92	0.86	0.81	0.88	0.83	0.79	0.74	0.78	0.74	0.70	0.72	0.69	0.66	0.59																																																																																																																								
品名	LED直管ランプ	5	0.94	0.89	0.85	0.91	0.86	0.82	0.79	0.81	0.77	0.74	0.75	0.72	0.70	0.63																																																																																																																								
形式	LDK40SS-N/18/24	7	0.97	0.93	0.90	0.94	0.90	0.87	0.84	0.84	0.82	0.79	0.79	0.77	0.75	0.67																																																																																																																								
器具光束	2,310 lm	10	0.99	0.96	0.94	0.96	0.93	0.91	0.89	0.88	0.86	0.84	0.82	0.80	0.79	0.71																																																																																																																								
器具効率 Ft= 100.0%			単体照度分布(初期) 																																																																																																																																					
上方光束 Fu= 18.0%																																																																																																																																								
下方光束 Fd= 82.0%																																																																																																																																								
配光分類																																																																																																																																								
BZ-																																																																																																																																								
最大取付間隔			配光曲線 																																																																																																																																					
A-A 1.38 H																																																																																																																																								
B-B 1.28 H																																																																																																																																								
保守率	良	0.86																																																																																																																																						
	中	0.81																																																																																																																																						
	否	0.72																																																																																																																																						
光度 (cd/1000 lm)			<table><thead><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr></thead><tbody><tr><td>0</td><td>215</td><td>215</td><td>215</td><td></td><td></td></tr><tr><td>10</td><td>213</td><td>212</td><td>212</td><td></td><td></td></tr><tr><td>20</td><td>207</td><td>201</td><td>203</td><td></td><td></td></tr><tr><td>30</td><td>197</td><td>183</td><td>190</td><td></td><td></td></tr><tr><td>40</td><td>184</td><td>160</td><td>172</td><td></td><td></td></tr><tr><td>50</td><td>171</td><td>128</td><td>152</td><td></td><td></td></tr><tr><td>60</td><td>157</td><td>96</td><td>130</td><td></td><td></td></tr><tr><td>70</td><td>138</td><td>58</td><td>108</td><td></td><td></td></tr><tr><td>80</td><td>120</td><td>24</td><td>87</td><td></td><td></td></tr><tr><td>90</td><td>102</td><td></td><td>68</td><td></td><td></td></tr><tr><td>100</td><td>85</td><td></td><td>54</td><td></td><td></td></tr><tr><td>110</td><td>69</td><td></td><td>43</td><td></td><td></td></tr><tr><td>120</td><td>57</td><td></td><td>35</td><td></td><td></td></tr><tr><td>130</td><td>45</td><td></td><td>23</td><td></td><td></td></tr><tr><td>140</td><td>24</td><td></td><td>4</td><td></td><td></td></tr><tr><td>150</td><td>3</td><td></td><td>1</td><td></td><td></td></tr><tr><td>160</td><td>1</td><td></td><td>1</td><td></td><td></td></tr><tr><td>170</td><td>1</td><td></td><td>1</td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>															A-0	B-B	C-0	A'-0	C'-0	0	215	215	215			10	213	212	212			20	207	201	203			30	197	183	190			40	184	160	172			50	171	128	152			60	157	96	130			70	138	58	108			80	120	24	87			90	102		68			100	85		54			110	69		43			120	57		35			130	45		23			140	24		4			150	3		1			160	1		1			170	1		1			180					
	A-0	B-B															C-0	A'-0	C'-0																																																																																																																					
0	215	215															215																																																																																																																							
10	213	212															212																																																																																																																							
20	207	201															203																																																																																																																							
30	197	183															190																																																																																																																							
40	184	160															172																																																																																																																							
50	171	128															152																																																																																																																							
60	157	96															130																																																																																																																							
70	138	58															108																																																																																																																							
80	120	24															87																																																																																																																							
90	102																68																																																																																																																							
100	85																54																																																																																																																							
110	69																43																																																																																																																							
120	57																35																																																																																																																							
130	45																23																																																																																																																							
140	24																4																																																																																																																							
150	3																1																																																																																																																							
160	1																1																																																																																																																							
170	1		1																																																																																																																																					
180																																																																																																																																								