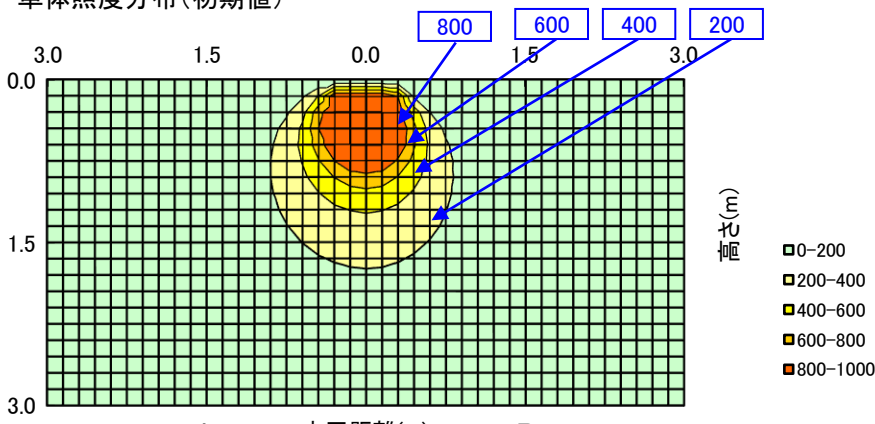
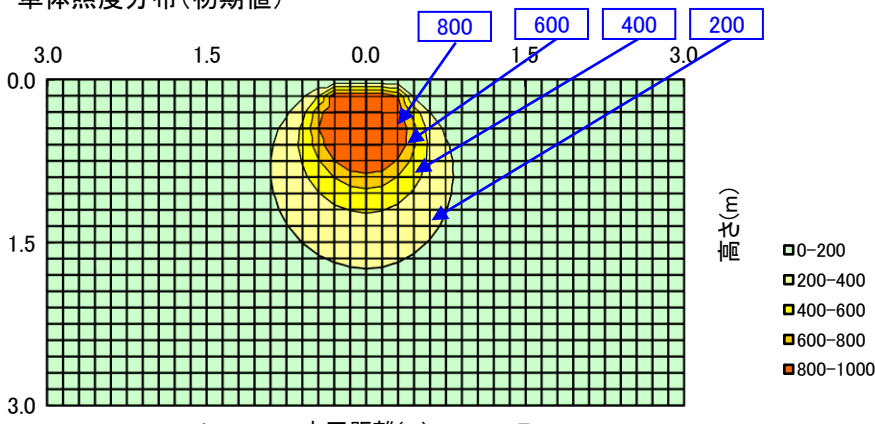
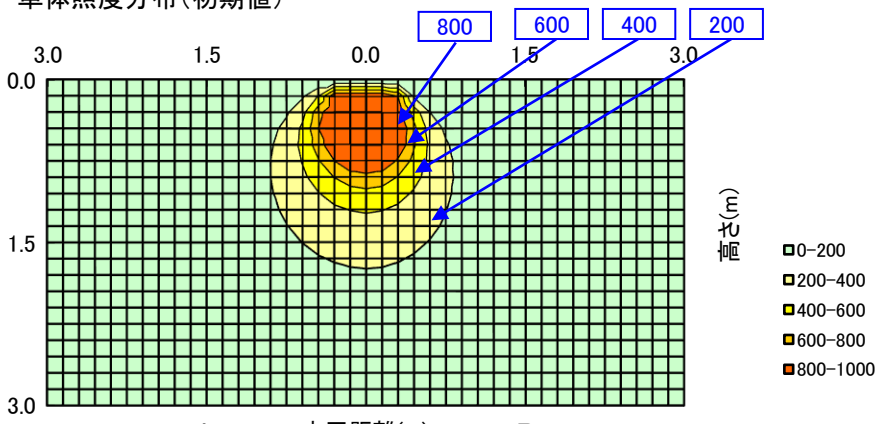
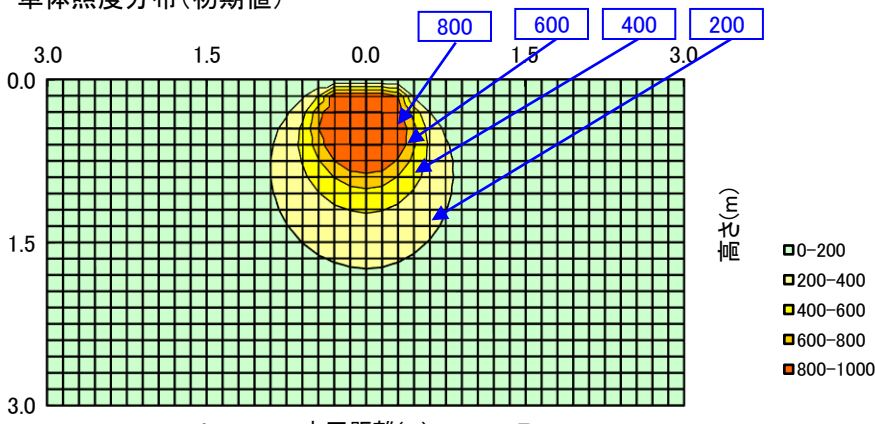
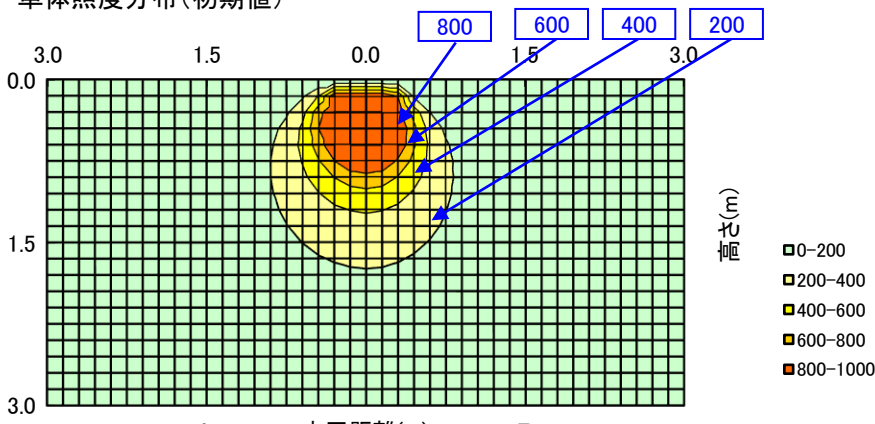
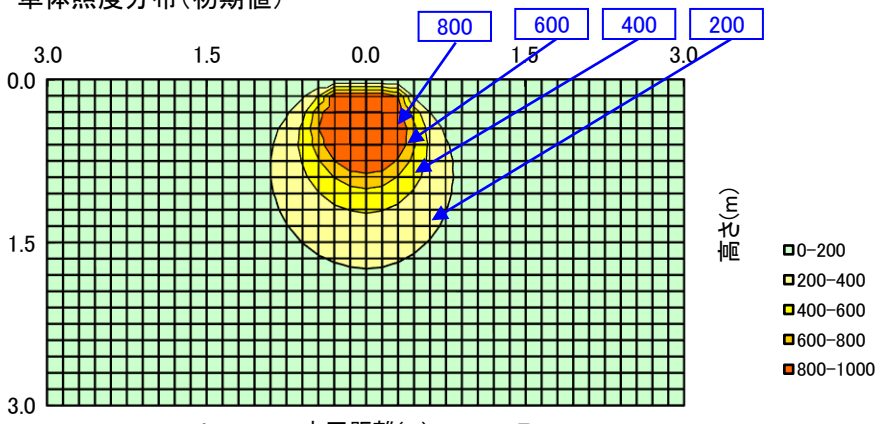


日立照明器具 照明特性																				
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%				
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
		床	10%													0%				
形式: NME4105-XM14E	室指数	照明率 S/H=1.0																		
<備考>	0.6	0.52	0.40	0.33	0.50	0.39	0.32	0.27	0.37	0.31	0.26	0.35	0.30	0.25	0.23					
	0.8	0.61	0.49	0.41	0.59	0.48	0.41	0.35	0.45	0.39	0.34	0.43	0.37	0.33	0.30					
姿図 	1	0.67	0.56	0.48	0.64	0.54	0.47	0.41	0.51	0.45	0.40	0.49	0.43	0.38	0.35					
	1.25	0.72	0.62	0.54	0.70	0.60	0.53	0.48	0.57	0.51	0.46	0.54	0.49	0.44	0.40					
	1.5	0.76	0.67	0.60	0.74	0.65	0.58	0.53	0.62	0.56	0.51	0.58	0.53	0.49	0.45					
	2	0.82	0.74	0.67	0.79	0.72	0.66	0.61	0.68	0.63	0.58	0.64	0.60	0.56	0.51					
	2.5	0.85	0.78	0.72	0.83	0.76	0.71	0.66	0.72	0.67	0.63	0.68	0.64	0.61	0.56					
	3	0.88	0.81	0.76	0.85	0.79	0.74	0.70	0.75	0.71	0.67	0.71	0.67	0.64	0.59					
光源	4	0.91	0.86	0.81	0.88	0.83	0.79	0.75	0.79	0.75	0.72	0.75	0.72	0.69	0.64					
品名 直管形LEDランプ	5	0.93	0.89	0.85	0.90	0.86	0.83	0.79	0.82	0.79	0.76	0.77	0.75	0.73	0.67					
形式 LDK40SS・N/15/24NE	7	0.96	0.92	0.89	0.93	0.90	0.87	0.84	0.85	0.83	0.81	0.81	0.79	0.77	0.71					
光束 2,400 lm	10	0.98	0.95	0.93	0.95	0.93	0.91	0.89	0.88	0.87	0.85	0.84	0.82	0.81	0.75					
器具効率 Ft= 96.9%		単体照度分布(初期値) 																		
上方光束 Fu= 12.1%																				
下方光束 Fd= 84.8%																				
最大取付間隔		配光曲線 																		
A-A 1.32 H																				
B-B 1.24 H																				
保守率	良																0.88			
	中	0.86																		
	否	0.81																		
光度 (cd/1000 lm)		配光曲線 																		
	A-0																B-B	C-0	A'-0	C'-0
0	252																252	252		
10	248																248	248		
20	239	232	235																	
30	222	208	215																	
40	201	174	187																	
50	181	141	161																	
60	153	101	129																	
70	127	58	99																	
80	106	22	77																	
90	82		53																	
100	62		37																	
110	48		27																	
120	36		19																	
130	24		13																	
140	17		5																	
150	3																			
160	1																			
170	1																			
180																				
		配光曲線 																		
		配光曲線 																		
		配光曲線 																		
		配光曲線 