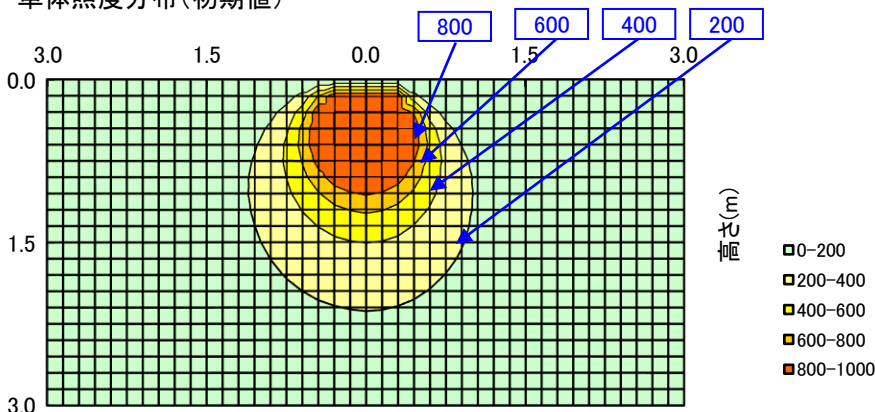
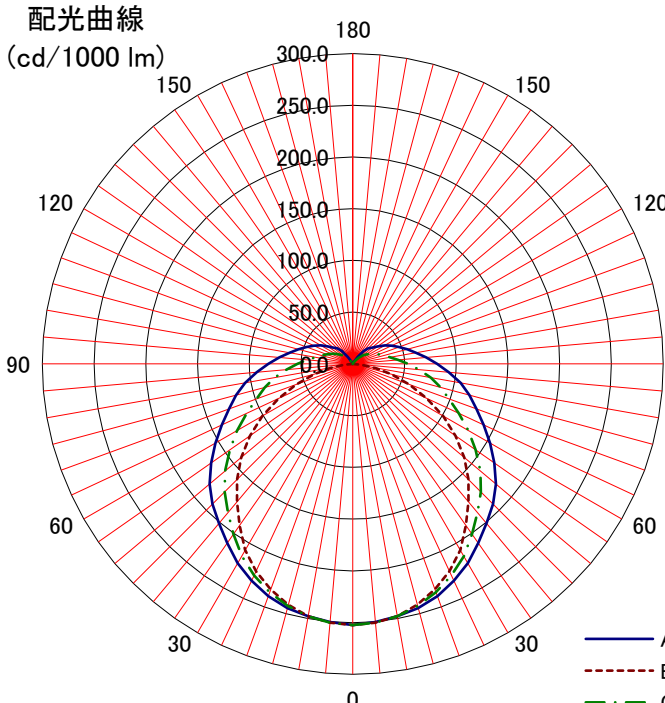


日立照明器具 照明特性																																																																																																																																								
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																								
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
		床	10%														0%																																																																																																																							
形式: NME4105-XM14E	室指数	照明率 S/H=1.0																																																																																																																																						
<備考>	0.6	0.52	0.40	0.33	0.50	0.39	0.32	0.27	0.37	0.31	0.26	0.35	0.30	0.25	0.23																																																																																																																									
	0.8	0.61	0.49	0.41	0.59	0.48	0.41	0.35	0.45	0.39	0.34	0.43	0.37	0.33	0.30																																																																																																																									
姿図 	1	0.67	0.56	0.48	0.64	0.54	0.47	0.41	0.51	0.45	0.40	0.49	0.43	0.38	0.35																																																																																																																									
	1.25	0.72	0.62	0.54	0.70	0.60	0.53	0.48	0.57	0.51	0.46	0.54	0.49	0.44	0.40																																																																																																																									
	1.5	0.76	0.67	0.60	0.74	0.65	0.58	0.53	0.62	0.56	0.51	0.58	0.53	0.49	0.45																																																																																																																									
	2	0.82	0.74	0.67	0.79	0.72	0.66	0.61	0.68	0.63	0.58	0.64	0.60	0.56	0.51																																																																																																																									
	2.5	0.85	0.78	0.72	0.83	0.76	0.71	0.66	0.72	0.67	0.63	0.68	0.64	0.61	0.56																																																																																																																									
	3	0.88	0.81	0.76	0.85	0.79	0.74	0.70	0.75	0.71	0.67	0.71	0.67	0.64	0.59																																																																																																																									
光源	4	0.91	0.86	0.81	0.88	0.83	0.79	0.75	0.79	0.75	0.72	0.75	0.72	0.69	0.64																																																																																																																									
品名 直管形LEDランプ	5	0.93	0.89	0.85	0.90	0.86	0.83	0.79	0.82	0.79	0.76	0.77	0.75	0.73	0.67																																																																																																																									
形式 LDK40SS・N/22/36NE	7	0.96	0.92	0.89	0.93	0.90	0.87	0.84	0.85	0.83	0.81	0.81	0.79	0.77	0.71																																																																																																																									
光束 3,600 lm	10	0.98	0.95	0.93	0.95	0.93	0.91	0.89	0.88	0.87	0.85	0.84	0.82	0.81	0.75																																																																																																																									
器具効率 Ft= 96.9%		単体照度分布(初期値) 																																																																																																																																						
上方光束 Fu= 12.1%																																																																																																																																								
下方光束 Fd= 84.8%																																																																																																																																								
最大取付間隔		配光曲線 (cd/1000 lm) 																																																																																																																																						
A-A 1.32 H																																																																																																																																								
B-B 1.24 H																																																																																																																																								
保守率																																																																																																																																								
良	0.88	<table><thead><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr></thead><tbody><tr><td>0</td><td>252</td><td>252</td><td>252</td><td></td><td></td></tr><tr><td>10</td><td>248</td><td>248</td><td>248</td><td></td><td></td></tr><tr><td>20</td><td>239</td><td>232</td><td>235</td><td></td><td></td></tr><tr><td>30</td><td>222</td><td>208</td><td>215</td><td></td><td></td></tr><tr><td>40</td><td>201</td><td>174</td><td>187</td><td></td><td></td></tr><tr><td>50</td><td>181</td><td>141</td><td>161</td><td></td><td></td></tr><tr><td>60</td><td>153</td><td>101</td><td>129</td><td></td><td></td></tr><tr><td>70</td><td>127</td><td>58</td><td>99</td><td></td><td></td></tr><tr><td>80</td><td>106</td><td>22</td><td>77</td><td></td><td></td></tr><tr><td>90</td><td>82</td><td></td><td>53</td><td></td><td></td></tr><tr><td>100</td><td>62</td><td></td><td>37</td><td></td><td></td></tr><tr><td>110</td><td>48</td><td></td><td>27</td><td></td><td></td></tr><tr><td>120</td><td>36</td><td></td><td>19</td><td></td><td></td></tr><tr><td>130</td><td>24</td><td></td><td>13</td><td></td><td></td></tr><tr><td>140</td><td>17</td><td></td><td>5</td><td></td><td></td></tr><tr><td>150</td><td>3</td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td>1</td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td>1</td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>																A-0	B-B	C-0	A'-0	C'-0	0	252	252	252			10	248	248	248			20	239	232	235			30	222	208	215			40	201	174	187			50	181	141	161			60	153	101	129			70	127	58	99			80	106	22	77			90	82		53			100	62		37			110	48		27			120	36		19			130	24		13			140	17		5			150	3					160	1					170	1					180					
	A-0																B-B	C-0	A'-0	C'-0																																																																																																																				
0	252																252	252																																																																																																																						
10	248																248	248																																																																																																																						
20	239																232	235																																																																																																																						
30	222																208	215																																																																																																																						
40	201																174	187																																																																																																																						
50	181																141	161																																																																																																																						
60	153																101	129																																																																																																																						
70	127																58	99																																																																																																																						
80	106	22	77																																																																																																																																					
90	82		53																																																																																																																																					
100	62		37																																																																																																																																					
110	48		27																																																																																																																																					
120	36		19																																																																																																																																					
130	24		13																																																																																																																																					
140	17		5																																																																																																																																					
150	3																																																																																																																																							
160	1																																																																																																																																							
170	1																																																																																																																																							
180																																																																																																																																								
中	0.86																																																																																																																																							
否	0.81																																																																																																																																							
光度 (cd/1000 lm)																																																																																																																																								