



日立照明器具 照明特性

形式: NME4203-J14A	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
	室指数		照明率 S/H=1.0													
姿図 	0.6		0.54	0.42	0.34	0.53	0.41	0.33	0.28	0.39	0.32	0.27	0.38	0.32	0.27	0.25
	0.8		0.64	0.51	0.43	0.62	0.50	0.42	0.37	0.48	0.41	0.36	0.47	0.40	0.35	0.33
	1		0.70	0.58	0.50	0.68	0.57	0.49	0.43	0.55	0.48	0.42	0.53	0.46	0.42	0.39
	1.25		0.76	0.65	0.57	0.73	0.63	0.56	0.50	0.61	0.54	0.49	0.59	0.53	0.48	0.45
	1.5		0.80	0.70	0.62	0.78	0.69	0.61	0.56	0.66	0.60	0.55	0.63	0.58	0.53	0.50
	2		0.86	0.77	0.70	0.84	0.76	0.69	0.64	0.73	0.67	0.63	0.70	0.65	0.61	0.58
	2.5		0.89	0.82	0.76	0.87	0.80	0.75	0.69	0.77	0.72	0.68	0.74	0.70	0.66	0.63
	3		0.92	0.85	0.80	0.90	0.84	0.78	0.74	0.80	0.76	0.72	0.77	0.74	0.70	0.66
	4		0.95	0.90	0.85	0.93	0.88	0.84	0.80	0.85	0.81	0.78	0.82	0.79	0.76	0.72
	5		0.98	0.93	0.89	0.95	0.91	0.87	0.84	0.88	0.85	0.82	0.85	0.82	0.80	0.76
品名 LED直管ランプ	5		0.98	0.93	0.89	0.95	0.91	0.87	0.84	0.88	0.85	0.82	0.85	0.82	0.80	0.76
形式 LDK40SS-N/18/24	7		1.00	0.97	0.94	0.98	0.95	0.92	0.89	0.92	0.89	0.87	0.89	0.87	0.85	0.81
器具光束: 4,690 lm	10		1.03	1.00	0.98	1.01	0.98	0.96	0.94	0.95	0.93	0.91	0.92	0.90	0.89	0.85

器具効率 Ft= 100.0%		
上方光束 Fu= 16.7%		
下方光束 Fd= 83.3%		
配光分類		
BZ-		
最大取付間隔		
A-A	1.34	H
B-B	1.26	H
保守率	良	0.86
	中	0.81
	否	0.72

単体照度分布(初期)

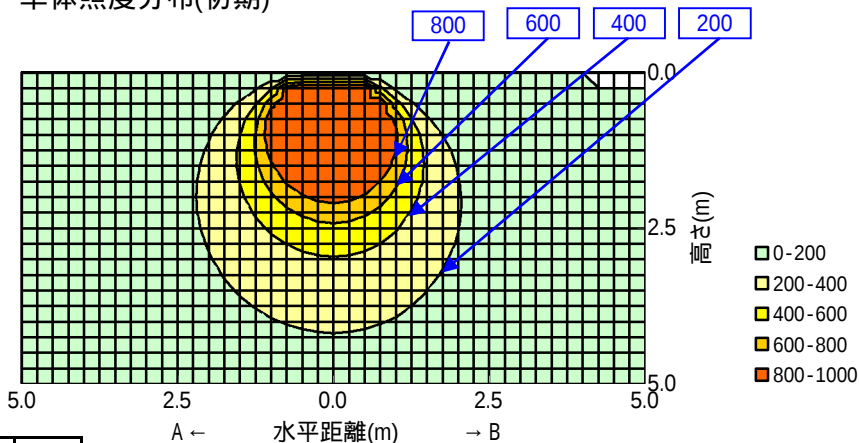

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	222	222	222		
10	220	218	219		
20	215	205	210		
30	206	185	196		
40	192	160	177		
50	178	129	156		
60	161	92	133		
70	145	57	108		
80	126	22	89		
90	85		56		
100	71		44		
110	60		37		
120	50		31		
130	41		26		
140	33		18		
150	18				
160					
170					
180					

配光曲線

