
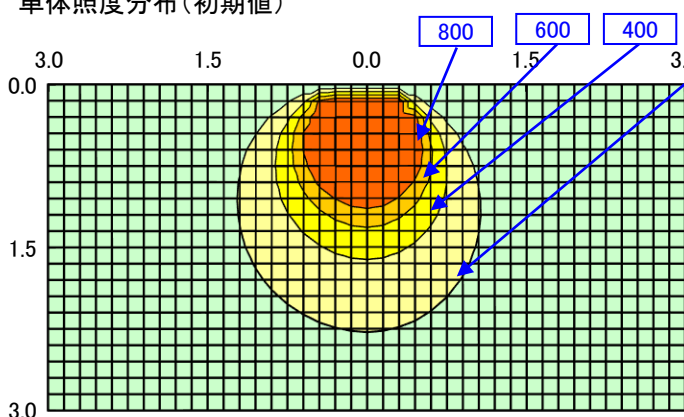
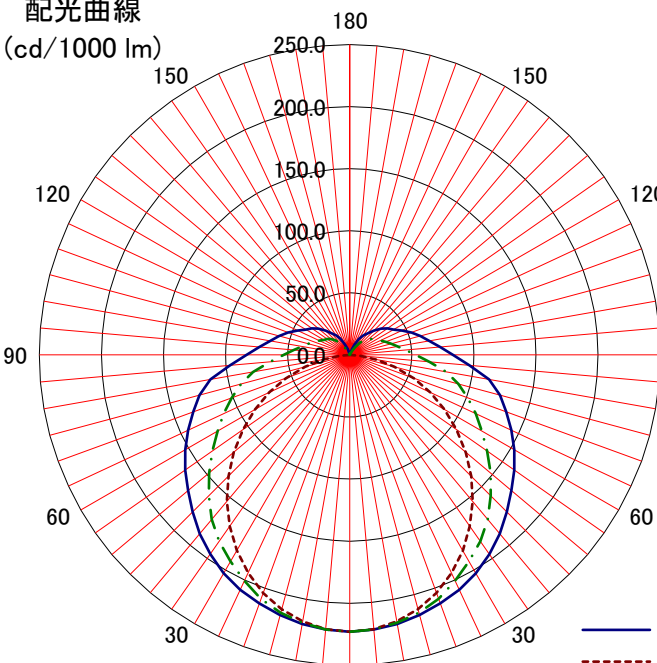


日立照明器具 照明特性

名称: 直管形LED搭載器具	天井	80%			70%				50%			30%			0%																																																																																																																										
	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																										
	床	10%														0%																																																																																																																									
形式: NME4203-JM14AE	室指数	照明率 S/H=1.0																																																																																																																																							
<備考>	0.6	0.50	0.38	0.30	0.48	0.37	0.30	0.25	0.35	0.28	0.24	0.33	0.27	0.23	0.20																																																																																																																										
	0.8	0.58	0.47	0.39	0.56	0.45	0.38	0.32	0.42	0.36	0.31	0.40	0.34	0.30	0.27																																																																																																																										
姿図 	1	0.64	0.53	0.45	0.61	0.51	0.44	0.38	0.48	0.42	0.37	0.45	0.40	0.35	0.31																																																																																																																										
	1.25	0.69	0.59	0.51	0.66	0.57	0.50	0.44	0.53	0.47	0.43	0.50	0.45	0.41	0.37																																																																																																																										
	1.5	0.73	0.64	0.56	0.70	0.62	0.55	0.50	0.58	0.52	0.47	0.54	0.49	0.45	0.41																																																																																																																										
	2	0.78	0.70	0.64	0.75	0.68	0.62	0.57	0.64	0.59	0.54	0.60	0.56	0.52	0.47																																																																																																																										
	2.5	0.82	0.75	0.69	0.79	0.72	0.67	0.62	0.68	0.63	0.59	0.64	0.60	0.56	0.51																																																																																																																										
	3	0.84	0.78	0.72	0.81	0.75	0.70	0.66	0.71	0.66	0.63	0.66	0.63	0.60	0.54																																																																																																																										
	光源	4	0.87	0.82	0.77	0.84	0.79	0.75	0.71	0.75	0.71	0.68	0.70	0.67	0.65	0.59																																																																																																																									
品名: 直管形LEDランプ	5	0.89	0.85	0.81	0.86	0.82	0.79	0.75	0.77	0.74	0.72	0.73	0.70	0.68	0.62																																																																																																																										
形式: LDK40SS・D/15/23NE	7	0.92	0.88	0.85	0.89	0.86	0.83	0.80	0.81	0.79	0.76	0.76	0.74	0.73	0.66																																																																																																																										
光束: 4,660 lm	10	0.94	0.91	0.89	0.91	0.89	0.87	0.85	0.84	0.82	0.81	0.79	0.78	0.76	0.70																																																																																																																										
器具効率 Ft= 93.8%		単体照度分布(初期値)  (lx) 0-200 200-400 400-600 600-800 800-1000																																																																																																																																							
上方光束 Fu= 14.2%																																																																																																																																									
下方光束 Fd= 79.7%																																																																																																																																									
最大取付間隔		配光曲線 (cd/1000 lm)  A B C-C'																																																																																																																																							
A-A 1.36 H																																																																																																																																									
B-B 1.22 H																																																																																																																																									
保守率	良	0.88	光度 (cd/1000 lm) <table><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>223</td><td>223</td><td>223</td><td></td><td></td></tr><tr><td>10</td><td>220</td><td>218</td><td>219</td><td></td><td></td></tr><tr><td>20</td><td>213</td><td>204</td><td>209</td><td></td><td></td></tr><tr><td>30</td><td>203</td><td>182</td><td>192</td><td></td><td></td></tr><tr><td>40</td><td>188</td><td>154</td><td>173</td><td></td><td></td></tr><tr><td>50</td><td>170</td><td>122</td><td>148</td><td></td><td></td></tr><tr><td>60</td><td>153</td><td>88</td><td>123</td><td></td><td></td></tr><tr><td>70</td><td>134</td><td>55</td><td>101</td><td></td><td></td></tr><tr><td>80</td><td>114</td><td>22</td><td>79</td><td></td><td></td></tr><tr><td>90</td><td>83</td><td></td><td>53</td><td></td><td></td></tr><tr><td>100</td><td>65</td><td></td><td>39</td><td></td><td></td></tr><tr><td>110</td><td>53</td><td></td><td>31</td><td></td><td></td></tr><tr><td>120</td><td>41</td><td></td><td>24</td><td></td><td></td></tr><tr><td>130</td><td>33</td><td></td><td>20</td><td></td><td></td></tr><tr><td>140</td><td>23</td><td></td><td>13</td><td></td><td></td></tr><tr><td>150</td><td>15</td><td></td><td>4</td><td></td><td></td></tr><tr><td>160</td><td>5</td><td></td><td>1</td><td></td><td></td></tr><tr><td>170</td><td>1</td><td></td><td>1</td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>																A-0	B-B	C-0	A'-0	C'-0	0	223	223	223			10	220	218	219			20	213	204	209			30	203	182	192			40	188	154	173			50	170	122	148			60	153	88	123			70	134	55	101			80	114	22	79			90	83		53			100	65		39			110	53		31			120	41		24			130	33		20			140	23		13			150	15		4			160	5		1			170	1		1			180					
	A-0	B-B																C-0	A'-0	C'-0																																																																																																																					
0	223	223																223																																																																																																																							
10	220	218																219																																																																																																																							
20	213	204	209																																																																																																																																						
30	203	182	192																																																																																																																																						
40	188	154	173																																																																																																																																						
50	170	122	148																																																																																																																																						
60	153	88	123																																																																																																																																						
70	134	55	101																																																																																																																																						
80	114	22	79																																																																																																																																						
90	83		53																																																																																																																																						
100	65		39																																																																																																																																						
110	53		31																																																																																																																																						
120	41		24																																																																																																																																						
130	33		20																																																																																																																																						
140	23		13																																																																																																																																						
150	15		4																																																																																																																																						
160	5		1																																																																																																																																						
170	1		1																																																																																																																																						
180																																																																																																																																									
	中	0.86																																																																																																																																							
	否	0.81																																																																																																																																							