
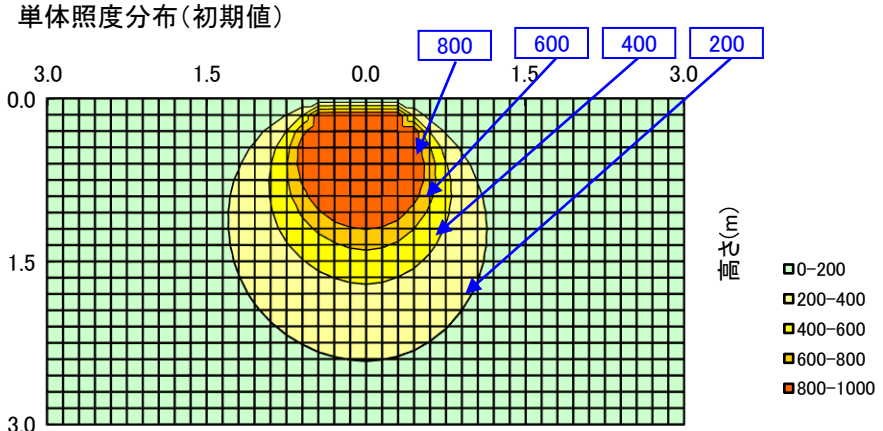
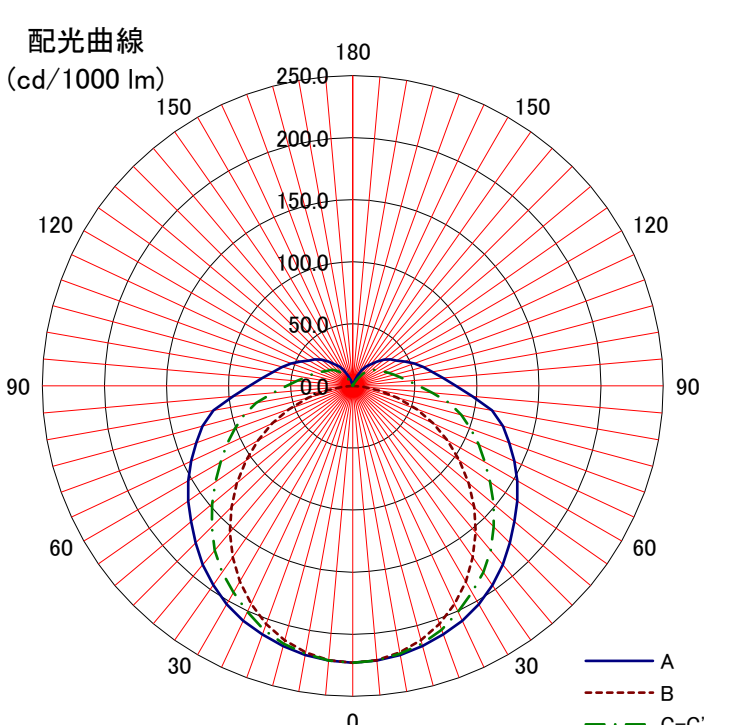


日立照明器具 照明特性																																																																																																																																								
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																								
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
		床	10%														0%																																																																																																																							
形式: NME4203-JM14AE	室指数	照明率 S/H=1.0																																																																																																																																						
〈備考〉	0.6	0.50	0.38	0.30	0.48	0.37	0.30	0.25	0.35	0.28	0.24	0.33	0.27	0.23	0.20																																																																																																																									
	0.8	0.58	0.47	0.39	0.56	0.45	0.38	0.32	0.42	0.36	0.31	0.40	0.34	0.30	0.27																																																																																																																									
姿図 	1	0.64	0.53	0.45	0.61	0.51	0.44	0.38	0.48	0.42	0.37	0.45	0.40	0.35	0.31																																																																																																																									
	1.25	0.69	0.59	0.51	0.66	0.57	0.50	0.44	0.53	0.47	0.43	0.50	0.45	0.41	0.37																																																																																																																									
	1.5	0.73	0.64	0.56	0.70	0.62	0.55	0.50	0.58	0.52	0.47	0.54	0.49	0.45	0.41																																																																																																																									
	2	0.78	0.70	0.64	0.75	0.68	0.62	0.57	0.64	0.59	0.54	0.60	0.56	0.52	0.47																																																																																																																									
	2.5	0.82	0.75	0.69	0.79	0.72	0.67	0.62	0.68	0.63	0.59	0.64	0.60	0.56	0.51																																																																																																																									
	3	0.84	0.78	0.72	0.81	0.75	0.70	0.66	0.71	0.66	0.63	0.66	0.63	0.60	0.54																																																																																																																									
	4	0.87	0.82	0.77	0.84	0.79	0.75	0.71	0.75	0.71	0.68	0.70	0.67	0.65	0.59																																																																																																																									
光源	5	0.89	0.85	0.81	0.86	0.82	0.79	0.75	0.77	0.74	0.72	0.73	0.70	0.68	0.62																																																																																																																									
品名 直管形LEDランプ	7	0.92	0.88	0.85	0.89	0.86	0.83	0.80	0.81	0.79	0.76	0.76	0.74	0.73	0.66																																																																																																																									
形式 LDK40SS・D/17/26NE	10	0.94	0.91	0.89	0.91	0.89	0.87	0.85	0.84	0.82	0.81	0.79	0.78	0.76	0.70																																																																																																																									
光束 5,240 lm																																																																																																																																								
器具効率 Ft= 93.8%		単体照度分布(初期値) 																																																																																																																																						
上方光束 Fu= 14.2%																																																																																																																																								
下方光束 Fd= 79.7%																																																																																																																																								
最大取付間隔		配光曲線 (cd/1000 lm) 																																																																																																																																						
A-A 1.36 H																																																																																																																																								
B-B 1.22 H																																																																																																																																								
保守率																																																																																																																																								
良	0.88	<table><thead><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr></thead><tbody><tr><td>0</td><td>223</td><td>223</td><td>223</td><td></td><td></td></tr><tr><td>10</td><td>220</td><td>218</td><td>219</td><td></td><td></td></tr><tr><td>20</td><td>213</td><td>204</td><td>209</td><td></td><td></td></tr><tr><td>30</td><td>203</td><td>182</td><td>192</td><td></td><td></td></tr><tr><td>40</td><td>188</td><td>154</td><td>173</td><td></td><td></td></tr><tr><td>50</td><td>170</td><td>122</td><td>148</td><td></td><td></td></tr><tr><td>60</td><td>153</td><td>88</td><td>123</td><td></td><td></td></tr><tr><td>70</td><td>134</td><td>55</td><td>101</td><td></td><td></td></tr><tr><td>80</td><td>114</td><td>22</td><td>79</td><td></td><td></td></tr><tr><td>90</td><td>83</td><td></td><td>53</td><td></td><td></td></tr><tr><td>100</td><td>65</td><td></td><td>39</td><td></td><td></td></tr><tr><td>110</td><td>53</td><td></td><td>31</td><td></td><td></td></tr><tr><td>120</td><td>41</td><td></td><td>24</td><td></td><td></td></tr><tr><td>130</td><td>33</td><td></td><td>20</td><td></td><td></td></tr><tr><td>140</td><td>23</td><td></td><td>13</td><td></td><td></td></tr><tr><td>150</td><td>15</td><td></td><td>4</td><td></td><td></td></tr><tr><td>160</td><td>5</td><td></td><td>1</td><td></td><td></td></tr><tr><td>170</td><td>1</td><td></td><td>1</td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>																A-0	B-B	C-0	A'-0	C'-0	0	223	223	223			10	220	218	219			20	213	204	209			30	203	182	192			40	188	154	173			50	170	122	148			60	153	88	123			70	134	55	101			80	114	22	79			90	83		53			100	65		39			110	53		31			120	41		24			130	33		20			140	23		13			150	15		4			160	5		1			170	1		1			180					
	A-0																B-B	C-0	A'-0	C'-0																																																																																																																				
0	223																223	223																																																																																																																						
10	220																218	219																																																																																																																						
20	213																204	209																																																																																																																						
30	203																182	192																																																																																																																						
40	188																154	173																																																																																																																						
50	170																122	148																																																																																																																						
60	153	88	123																																																																																																																																					
70	134	55	101																																																																																																																																					
80	114	22	79																																																																																																																																					
90	83		53																																																																																																																																					
100	65		39																																																																																																																																					
110	53		31																																																																																																																																					
120	41		24																																																																																																																																					
130	33		20																																																																																																																																					
140	23		13																																																																																																																																					
150	15		4																																																																																																																																					
160	5		1																																																																																																																																					
170	1		1																																																																																																																																					
180																																																																																																																																								
中	0.86																																																																																																																																							
否	0.81																																																																																																																																							
光度 (cd/1000 lm)																																																																																																																																								