


日立照明器具 照明特性

名称:直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式:NME4203-JM14AE	室指数	照明率 S/H=1.0														
<備考>	0.6	0.50	0.38	0.30	0.48	0.37	0.30	0.25	0.35	0.28	0.24	0.33	0.27	0.23	0.20	
	0.8	0.58	0.47	0.39	0.56	0.45	0.38	0.32	0.42	0.36	0.31	0.40	0.34	0.30	0.27	
姿図 	1	0.64	0.53	0.45	0.61	0.51	0.44	0.38	0.48	0.42	0.37	0.45	0.40	0.35	0.31	
	1.25	0.69	0.59	0.51	0.66	0.57	0.50	0.44	0.53	0.47	0.43	0.50	0.45	0.41	0.37	
	1.5	0.73	0.64	0.56	0.70	0.62	0.55	0.50	0.58	0.52	0.47	0.54	0.49	0.45	0.41	
	2	0.78	0.70	0.64	0.75	0.68	0.62	0.57	0.64	0.59	0.54	0.60	0.56	0.52	0.47	
	2.5	0.82	0.75	0.69	0.79	0.72	0.67	0.62	0.68	0.63	0.59	0.64	0.60	0.56	0.51	
	3	0.84	0.78	0.72	0.81	0.75	0.70	0.66	0.71	0.66	0.63	0.66	0.63	0.60	0.54	
	4	0.87	0.82	0.77	0.84	0.79	0.75	0.71	0.75	0.71	0.68	0.70	0.67	0.65	0.59	
光源	5	0.89	0.85	0.81	0.86	0.82	0.79	0.75	0.77	0.74	0.72	0.73	0.70	0.68	0.62	
品名:直管形LEDランプ	7	0.92	0.88	0.85	0.89	0.86	0.83	0.80	0.81	0.79	0.76	0.76	0.74	0.73	0.66	
形式:LDK40SS・D/22/34NE	10	0.94	0.91	0.89	0.91	0.89	0.87	0.85	0.84	0.82	0.81	0.79	0.78	0.76	0.70	
光束:6,980 lm																

器具効率 Ft=93.8%

上方光束 Fu=14.2%

下方光束 Fd=79.7%

最大取付間隔

A-A1.36H

B-B1.22H

保守率

良0.88


中0.86

否0.81

光度 (cd/1000 lm)


	A-0	B-B	C-0	A'-0	C'-0
0	223	223	223		
10	220	218	219		
20	213	204	209		
30	203	182	192		
40	188	154	173		
50	170	122	148		
60	153	88	123		
70	134	55	101		
80	114	22	79		
90	83		53		
100	65		39		
110	53		31		
120	41		24		
130	33		20		
140	23		13		
150	15		4		
160	5		1		
170	1		1		
180					

単体照度分布(初期値)

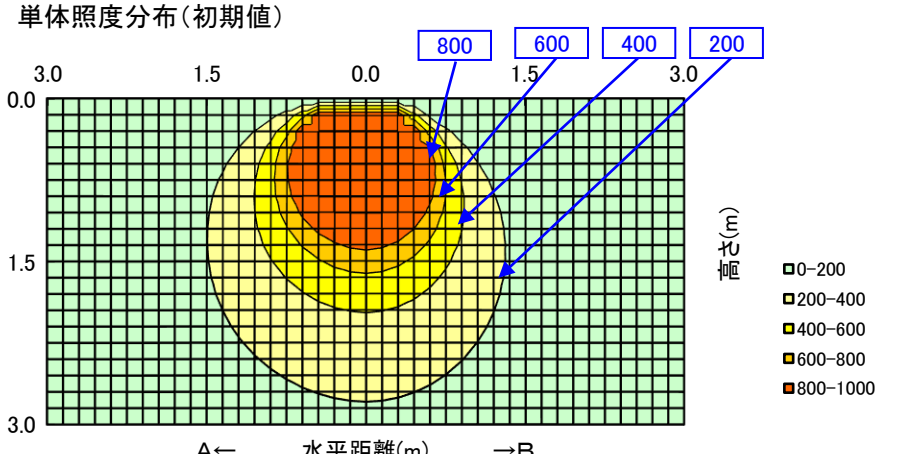

0-200
200-400
400-600
600-800
800-1000

配光曲線
(cd/1000 lm)

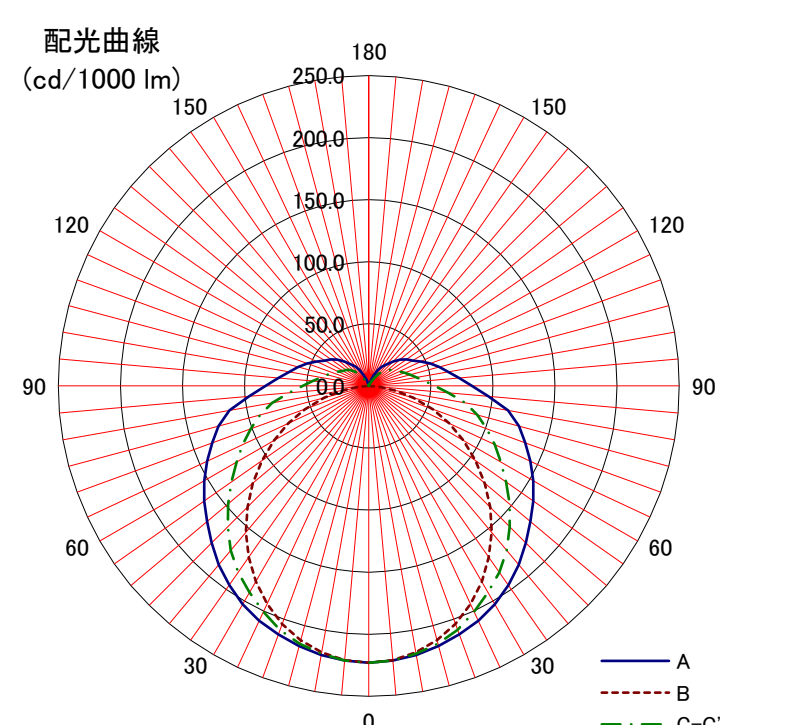

A
B
C-C'