
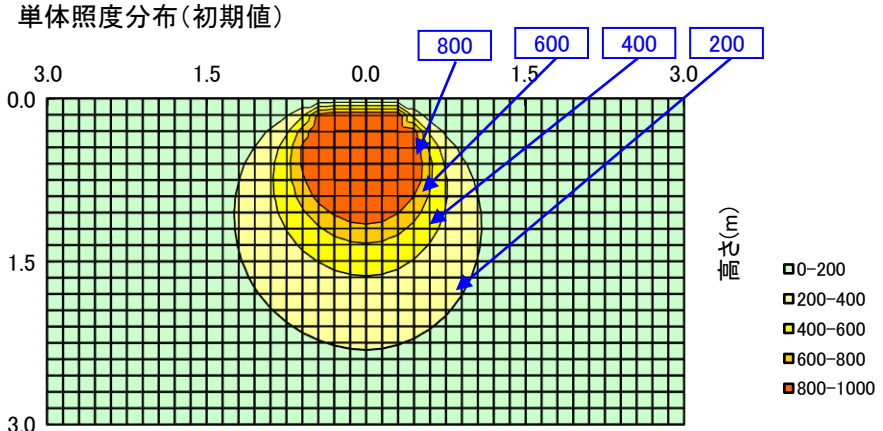
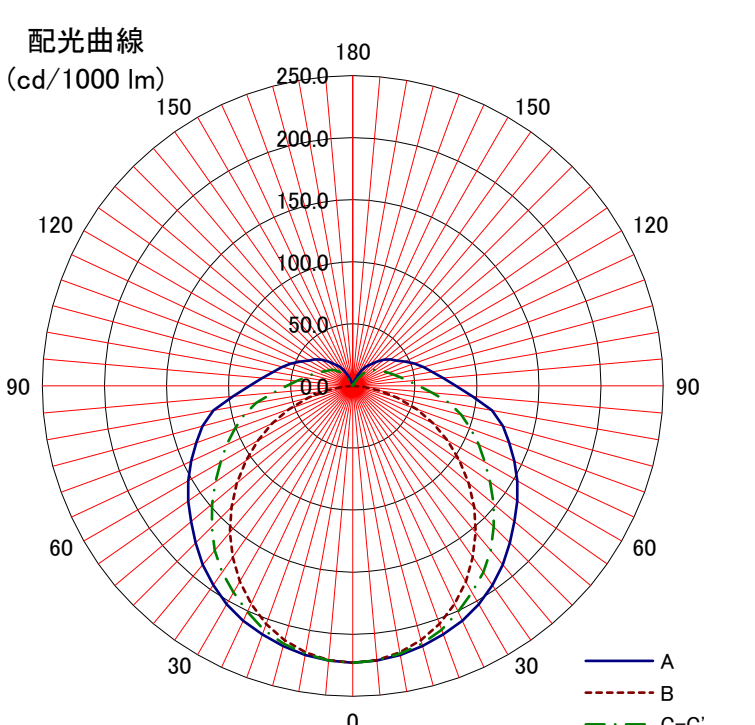


日立照明器具 照明特性																
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: NME4203-JM14AE	室指数	照明率 S/H=1.0														
<備考>	0.6	0.50	0.38	0.30	0.48	0.37	0.30	0.25	0.35	0.28	0.24	0.33	0.27	0.23	0.20	
	0.8	0.58	0.47	0.39	0.56	0.45	0.38	0.32	0.42	0.36	0.31	0.40	0.34	0.30	0.27	
姿図 	1	0.64	0.53	0.45	0.61	0.51	0.44	0.38	0.48	0.42	0.37	0.45	0.40	0.35	0.31	
	1.25	0.69	0.59	0.51	0.66	0.57	0.50	0.44	0.53	0.47	0.43	0.50	0.45	0.41	0.37	
	1.5	0.73	0.64	0.56	0.70	0.62	0.55	0.50	0.58	0.52	0.47	0.54	0.49	0.45	0.41	
	2	0.78	0.70	0.64	0.75	0.68	0.62	0.57	0.64	0.59	0.54	0.60	0.56	0.52	0.47	
	2.5	0.82	0.75	0.69	0.79	0.72	0.67	0.62	0.68	0.63	0.59	0.64	0.60	0.56	0.51	
	3	0.84	0.78	0.72	0.81	0.75	0.70	0.66	0.71	0.66	0.63	0.66	0.63	0.60	0.54	
	4	0.87	0.82	0.77	0.84	0.79	0.75	0.71	0.75	0.71	0.68	0.70	0.67	0.65	0.59	
光源	5	0.89	0.85	0.81	0.86	0.82	0.79	0.75	0.77	0.74	0.72	0.73	0.70	0.68	0.62	
品名 直管形LEDランプ	7	0.92	0.88	0.85	0.89	0.86	0.83	0.80	0.81	0.79	0.76	0.76	0.74	0.73	0.66	
形式 LDK40SS・N/15/24NE	10	0.94	0.91	0.89	0.91	0.89	0.87	0.85	0.84	0.82	0.81	0.79	0.78	0.76	0.70	
光束 4,800 lm																
器具効率 Ft= 93.8%		単体照度分布(初期値) 														
上方光束 Fu= 14.2%																
下方光束 Fd= 79.7%																
最大取付間隔																
A-A		1.36	H													
B-B		1.22	H													
保守率	良	0.88														
	中	0.86														
	否	0.81														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	223	223	223													
10	220	218	219													
20	213	204	209													
30	203	182	192													
40	188	154	173													
50	170	122	148													
60	153	88	123													
70	134	55	101													
80	114	22	79													
90	83		53													
100	65		39													
110	53		31													
120	41		24													
130	33		20													
140	23		13													
150	15		4													
160	5		1													
170	1		1													
180																
配光曲線 (cd/1000 lm)																
		A B C-C'														