
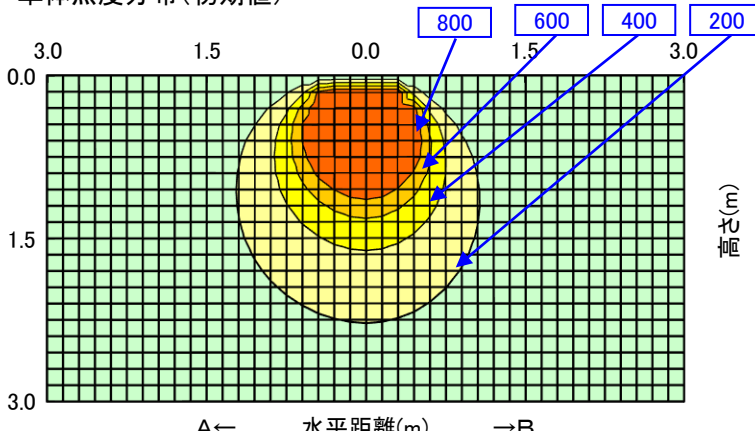
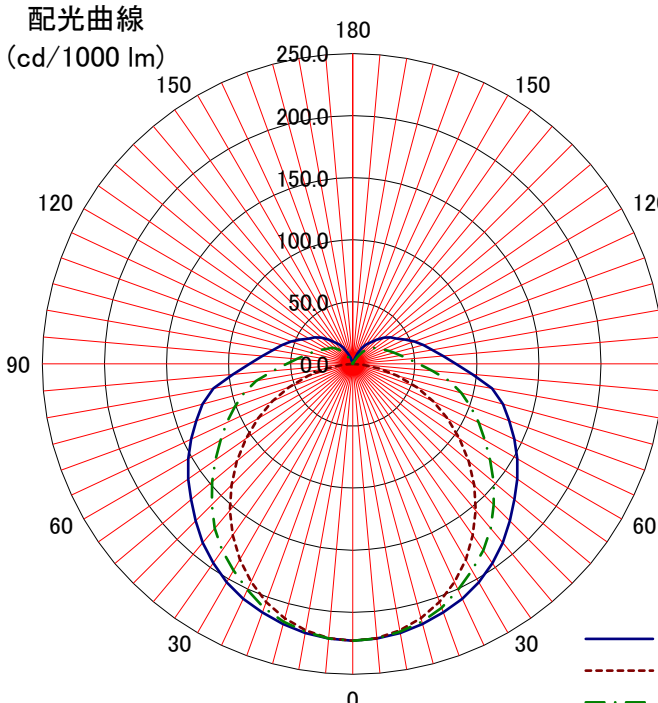


日立照明器具 照明特性																	
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
形式: NME4203-XM14E	室指数	照明率 S/H=1.0															
<備考>	0.6	0.50	0.38	0.30	0.48	0.37	0.30	0.25	0.35	0.28	0.24	0.33	0.27	0.23	0.20		
	0.8	0.58	0.47	0.39	0.56	0.45	0.38	0.32	0.42	0.36	0.31	0.40	0.34	0.30	0.27		
姿図 	1	0.64	0.53	0.45	0.61	0.51	0.44	0.38	0.48	0.42	0.37	0.45	0.40	0.35	0.31		
	1.25	0.69	0.59	0.51	0.66	0.57	0.50	0.44	0.53	0.47	0.43	0.50	0.45	0.41	0.37		
	1.5	0.73	0.64	0.56	0.70	0.62	0.55	0.50	0.58	0.52	0.47	0.54	0.49	0.45	0.41		
	2	0.78	0.70	0.64	0.75	0.68	0.62	0.57	0.64	0.59	0.54	0.60	0.56	0.52	0.47		
	2.5	0.82	0.75	0.69	0.79	0.72	0.67	0.62	0.68	0.63	0.59	0.64	0.60	0.56	0.51		
	3	0.84	0.78	0.72	0.81	0.75	0.70	0.66	0.71	0.66	0.63	0.66	0.63	0.60	0.54		
	4	0.87	0.82	0.77	0.84	0.79	0.75	0.71	0.75	0.71	0.68	0.70	0.67	0.65	0.59		
光源	5	0.89	0.85	0.81	0.86	0.82	0.79	0.75	0.77	0.74	0.72	0.73	0.70	0.68	0.62		
品名 直管形LEDランプ	7	0.92	0.88	0.85	0.89	0.86	0.83	0.80	0.81	0.79	0.76	0.76	0.74	0.73	0.66		
形式 LDK40SS・D/15/23NE	10	0.94	0.91	0.89	0.91	0.89	0.87	0.85	0.84	0.82	0.81	0.79	0.78	0.76	0.70		
光束 4,660 lm																	
器具効率 Ft= 93.8%		単体照度分布(初期値) 															
上方光束 Fu= 14.2%																	
下方光束 Fd= 79.7%																	
最大取付間隔		配光曲線 															
A-A 1.36 H																	
B-B 1.22 H																	
保守率	良																0.88
	中																0.86
	否																0.81
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	223	223	223														
10	220	218	219														
20	213	204	209														
30	203	182	192														
40	188	154	173														
50	170	122	148														
60	153	88	123														
70	134	55	101														
80	114	22	79														
90	83		53														
100	65		39														
110	53		31														
120	41		24														
130	33		20														
140	23		13														
150	15		4														
160	5		1														
170	1		1														
180																	