

日立照明器具 照明特性


名称: 直管形LED搭載器具	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: NME4205-JM14AE	室指数	照明率 S/H=1.0														
＜備考＞	0.6	0.51	0.39	0.32	0.49	0.39	0.32	0.27	0.37	0.31	0.26	0.35	0.30	0.26	0.23	
	0.8	0.60	0.48	0.41	0.58	0.47	0.40	0.35	0.45	0.39	0.34	0.43	0.38	0.33	0.30	
姿図 	1	0.65	0.55	0.47	0.63	0.53	0.46	0.41	0.51	0.45	0.40	0.49	0.43	0.39	0.36	
	1.25	0.71	0.61	0.53	0.68	0.59	0.53	0.47	0.57	0.51	0.46	0.54	0.49	0.45	0.41	
	1.5	0.75	0.66	0.59	0.72	0.64	0.58	0.52	0.61	0.56	0.51	0.58	0.54	0.50	0.46	
	2	0.80	0.72	0.66	0.78	0.71	0.65	0.60	0.68	0.63	0.58	0.64	0.60	0.57	0.53	
	2.5	0.83	0.77	0.71	0.81	0.75	0.70	0.65	0.72	0.67	0.63	0.68	0.65	0.61	0.57	
	3	0.86	0.80	0.74	0.83	0.78	0.73	0.69	0.74	0.70	0.67	0.71	0.68	0.65	0.60	
	4	0.89	0.84	0.79	0.86	0.82	0.78	0.74	0.78	0.75	0.72	0.75	0.72	0.70	0.65	
光源	5	0.91	0.87	0.83	0.89	0.85	0.81	0.78	0.81	0.78	0.76	0.78	0.75	0.73	0.69	
品名 直管形LEDランプ	7	0.93	0.90	0.87	0.91	0.88	0.86	0.83	0.85	0.82	0.80	0.81	0.79	0.78	0.73	
形式 LDK40SS・D/15/23NE	10	0.95	0.93	0.91	0.93	0.91	0.89	0.87	0.87	0.86	0.84	0.84	0.83	0.81	0.77	
光束 4,660 lm																

器具効率 Ft= 93.4%
 上方光束 Fu= 7.8%
 下方光束 Fd= 85.6%

最大取付間隔			
A-A	1.32	H	
B-B	1.24	H	
保守率	良	0.88	
	中	0.86	
	否	0.81	

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	258	258	258		
10	253	253	253		
20	243	238	240		
30	228	214	220		
40	207	180	195		
50	183	146	164		
60	155	105	131		
70	129	64	101		
80	103	22	76		
90	51		34		
100	38		23		
110	29		16		
120	23		12		
130	16		8		
140	11		6		
150	7		2		
160	1		1		
170	1				
180					

単体照度分布(初期値)

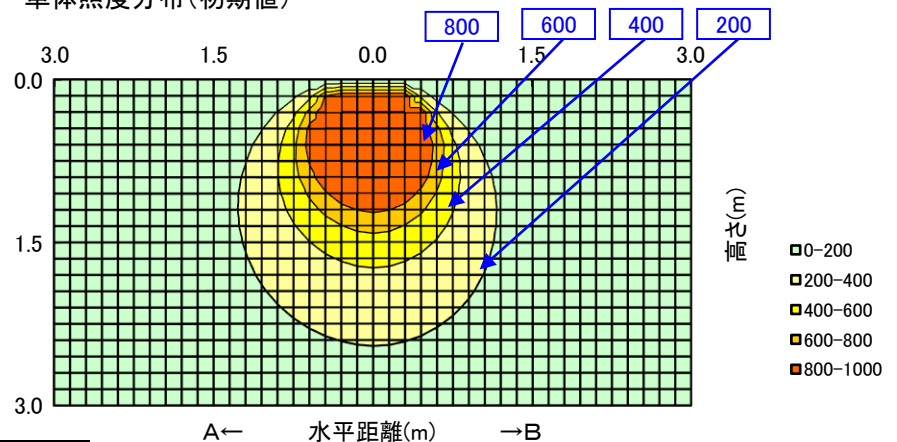

配光曲線
(cd/1000 lm)

