


日立照明器具 照明特性


形式: NME4205-X14A	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
	室指数		照明率 S/H=1.0													
姿図 	0.6		0.53	0.40	0.32	0.51	0.39	0.32	0.26	0.37	0.30	0.25	0.35	0.29	0.25	0.22
	0.8		0.62	0.49	0.41	0.59	0.48	0.40	0.35	0.45	0.39	0.33	0.43	0.37	0.32	0.29
	1		0.68	0.56	0.48	0.65	0.55	0.47	0.41	0.52	0.45	0.39	0.49	0.43	0.38	0.34
	1.25		0.74	0.63	0.55	0.71	0.61	0.53	0.47	0.58	0.51	0.46	0.54	0.49	0.44	0.40
	1.5		0.78	0.68	0.60	0.75	0.66	0.59	0.53	0.62	0.56	0.51	0.59	0.54	0.49	0.45
	2		0.84	0.75	0.68	0.81	0.73	0.67	0.61	0.69	0.63	0.59	0.65	0.60	0.56	0.52
	2.5		0.87	0.80	0.73	0.84	0.77	0.72	0.67	0.73	0.68	0.64	0.69	0.65	0.61	0.56
	3		0.90	0.83	0.77	0.87	0.81	0.75	0.71	0.76	0.72	0.68	0.72	0.68	0.65	0.60
	4		0.93	0.88	0.83	0.90	0.85	0.81	0.77	0.81	0.77	0.73	0.76	0.73	0.70	0.65
	5		0.95	0.91	0.86	0.93	0.88	0.84	0.81	0.84	0.80	0.77	0.79	0.76	0.74	0.68
品名 LED直管ランプ	5		0.95	0.91	0.86	0.93	0.88	0.84	0.81	0.84	0.80	0.77	0.79	0.76	0.74	0.68
形式 LDK40SS N/18/24	7		0.98	0.95	0.91	0.95	0.92	0.89	0.86	0.87	0.85	0.83	0.83	0.81	0.79	0.73
器具光束: 4,520 lm	10		1.00	0.98	0.95	0.98	0.95	0.93	0.91	0.91	0.89	0.87	0.86	0.85	0.83	0.77

器具効率 Ft= 100.0%
 上方光束 Fu= 12.6%
 下方光束 Fd= 87.4%

配光分類		
BZ-		
最大取付間隔		
A-A	1.38	H
B-B	1.28	H
保守率	良	0.86
	中	0.81
	否	0.72

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	237	237	237		
10	233	234	233		
20	226	222	224		
30	216	203	209		
40	202	177	190		
50	183	143	166		
60	163	107	140		
70	143	64	114		
80	116	25	87		
90	72		55		
100	55		35		
110	45		28		
120	37		22		
130	29		17		
140	21		9		
150	10				
160					
170					
180					

単体照度分布(初期)

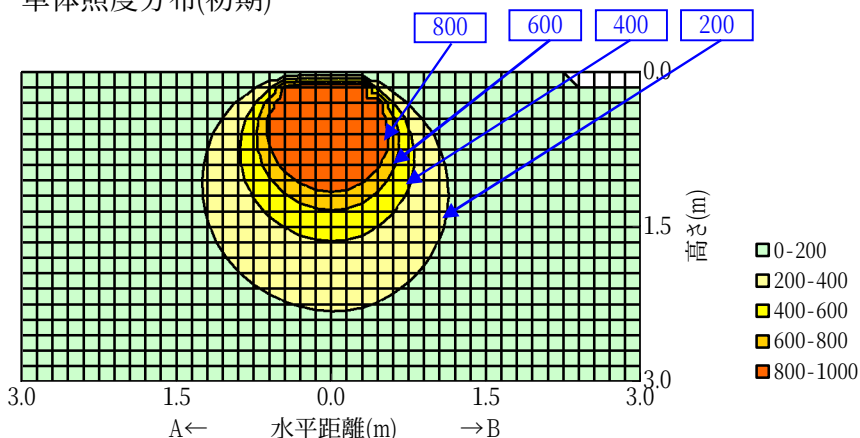

配光曲線

