
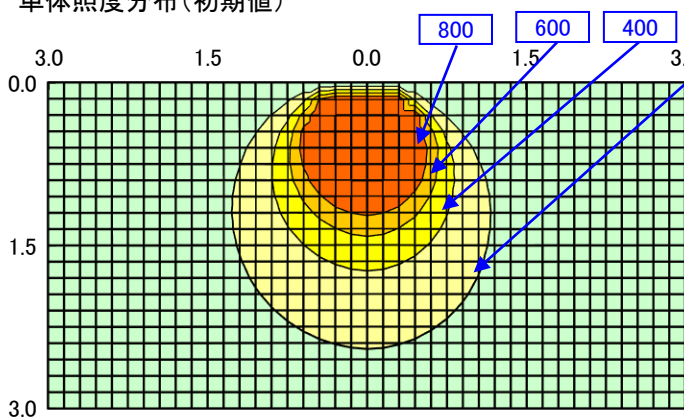
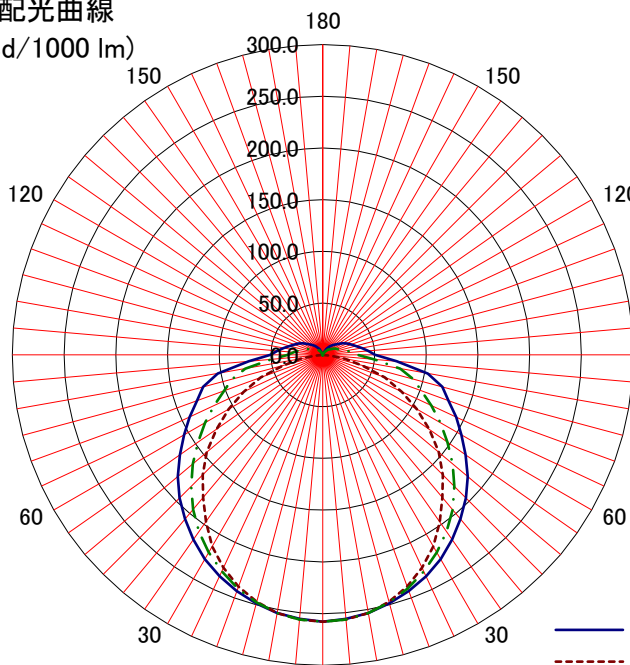


日立照明器具 照明特性

名称: 直管形LED搭載器具	天井	80%			70%				50%			30%			0%																																																																																																																										
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																									
形式: NME4205-XM14E	床	10%														0%																																																																																																																									
		照明率 S/H=1.0																																																																																																																																							
〈備考〉	室指数	0.6	0.51	0.39	0.32	0.49	0.39	0.32	0.27	0.37	0.31	0.26	0.35	0.30	0.26	0.23																																																																																																																									
	0.8	0.60	0.48	0.41	0.58	0.47	0.40	0.35	0.45	0.39	0.34	0.43	0.38	0.33	0.30																																																																																																																										
姿図 	1	0.65	0.55	0.47	0.63	0.53	0.46	0.41	0.51	0.45	0.40	0.49	0.43	0.39	0.36																																																																																																																										
	1.25	0.71	0.61	0.53	0.68	0.59	0.53	0.47	0.57	0.51	0.46	0.54	0.49	0.45	0.41																																																																																																																										
	1.5	0.75	0.66	0.59	0.72	0.64	0.58	0.52	0.61	0.56	0.51	0.58	0.54	0.50	0.46																																																																																																																										
	2	0.80	0.72	0.66	0.78	0.71	0.65	0.60	0.68	0.63	0.58	0.64	0.60	0.57	0.53																																																																																																																										
	2.5	0.83	0.77	0.71	0.81	0.75	0.70	0.65	0.72	0.67	0.63	0.68	0.65	0.61	0.57																																																																																																																										
	3	0.86	0.80	0.74	0.83	0.78	0.73	0.69	0.74	0.70	0.67	0.71	0.68	0.65	0.60																																																																																																																										
	4	0.89	0.84	0.79	0.86	0.82	0.78	0.74	0.78	0.75	0.72	0.75	0.72	0.70	0.65																																																																																																																										
光源	5	0.91	0.87	0.83	0.89	0.85	0.81	0.78	0.81	0.78	0.76	0.78	0.75	0.73	0.69																																																																																																																										
品名 直管形LEDランプ	7	0.93	0.90	0.87	0.91	0.88	0.86	0.83	0.85	0.82	0.80	0.81	0.79	0.78	0.73																																																																																																																										
形式 LDK40SS・D/15/23NE	10	0.95	0.93	0.91	0.93	0.91	0.89	0.87	0.87	0.86	0.84	0.84	0.83	0.81	0.77																																																																																																																										
光束 4,660 lm																																																																																																																																									
器具効率 Ft= 93.4%		単体照度分布(初期値)  800 600 400 200 3.0 1.5 0.0 1.5 3.0 0.0 1.5 3.0 A← 水平距離(m) →B (E)lx 0-200 200-400 400-600 600-800 800-1000																																																																																																																																							
上方光束 Fu= 7.8%																																																																																																																																									
下方光束 Fd= 85.6%																																																																																																																																									
最大取付間隔		配光曲線 (cd/1000 lm)  180 150 120 90 60 30 0 300.0 250.0 200.0 150.0 100.0 50.0 0.0 A B C-C'																																																																																																																																							
A-A 1.32 H																																																																																																																																									
B-B 1.24 H																																																																																																																																									
保守率 良 0.88																																																																																																																																									
保守率	中	0.86	光度 (cd/1000 lm) <table><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>258</td><td>258</td><td>258</td><td></td><td></td></tr><tr><td>10</td><td>253</td><td>253</td><td>253</td><td></td><td></td></tr><tr><td>20</td><td>243</td><td>238</td><td>240</td><td></td><td></td></tr><tr><td>30</td><td>228</td><td>214</td><td>220</td><td></td><td></td></tr><tr><td>40</td><td>207</td><td>180</td><td>195</td><td></td><td></td></tr><tr><td>50</td><td>183</td><td>146</td><td>164</td><td></td><td></td></tr><tr><td>60</td><td>155</td><td>105</td><td>131</td><td></td><td></td></tr><tr><td>70</td><td>129</td><td>64</td><td>101</td><td></td><td></td></tr><tr><td>80</td><td>103</td><td>22</td><td>76</td><td></td><td></td></tr><tr><td>90</td><td>51</td><td></td><td>34</td><td></td><td></td></tr><tr><td>100</td><td>38</td><td></td><td>23</td><td></td><td></td></tr><tr><td>110</td><td>29</td><td></td><td>16</td><td></td><td></td></tr><tr><td>120</td><td>23</td><td></td><td>12</td><td></td><td></td></tr><tr><td>130</td><td>16</td><td></td><td>8</td><td></td><td></td></tr><tr><td>140</td><td>11</td><td></td><td>6</td><td></td><td></td></tr><tr><td>150</td><td>7</td><td></td><td>2</td><td></td><td></td></tr><tr><td>160</td><td>1</td><td></td><td>1</td><td></td><td></td></tr><tr><td>170</td><td>1</td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>																A-0	B-B	C-0	A'-0	C'-0	0	258	258	258			10	253	253	253			20	243	238	240			30	228	214	220			40	207	180	195			50	183	146	164			60	155	105	131			70	129	64	101			80	103	22	76			90	51		34			100	38		23			110	29		16			120	23		12			130	16		8			140	11		6			150	7		2			160	1		1			170	1					180					
		A-0																B-B	C-0	A'-0	C'-0																																																																																																																				
0	258	258																258																																																																																																																							
10	253	253																253																																																																																																																							
20	243	238																240																																																																																																																							
30	228	214																220																																																																																																																							
40	207	180																195																																																																																																																							
50	183	146																164																																																																																																																							
60	155	105																131																																																																																																																							
70	129	64																101																																																																																																																							
80	103	22	76																																																																																																																																						
90	51		34																																																																																																																																						
100	38		23																																																																																																																																						
110	29		16																																																																																																																																						
120	23		12																																																																																																																																						
130	16		8																																																																																																																																						
140	11		6																																																																																																																																						
150	7		2																																																																																																																																						
160	1		1																																																																																																																																						
170	1																																																																																																																																								
180																																																																																																																																									
	否	0.81																																																																																																																																							