


日立照明器具 照明特性

形式: NME4223-J14A	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
	室指数		照明率 S/H=1.0													
姿図 	0.6	0.59	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33	
	0.8	0.69	0.58	0.51	0.68	0.58	0.51	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43	
	1	0.76	0.66	0.59	0.75	0.65	0.58	0.53	0.64	0.57	0.53	0.62	0.57	0.52	0.50	
	1.25	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.70	0.65	0.60	0.69	0.64	0.59	0.57	
	1.5	0.86	0.78	0.72	0.85	0.77	0.71	0.66	0.75	0.70	0.66	0.74	0.69	0.65	0.63	
	2	0.92	0.85	0.80	0.90	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.71	
	2.5	0.95	0.89	0.84	0.93	0.88	0.84	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.75	
	3	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.79	
	4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83	
	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.86	
光源	4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83	
品名 LED直管ランプ	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.86	
形式 LDK40SS-N/18/24	7	1.04	1.02	0.99	1.03	1.00	0.98	0.97	0.98	0.97	0.95	0.96	0.95	0.93	0.91	
器具光束 4,020 lm	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.94	

器具効率 Ft=	100.0%
上方光束 Fu=	0.0%
下方光束 Fd=	100.0%
配光分類	BZ-
最大取付間隔	
A-A	1.38 H
B-B	1.30 H
保守率	良 0.86
	中 0.81
	否 0.72

単体照度分布(初期)

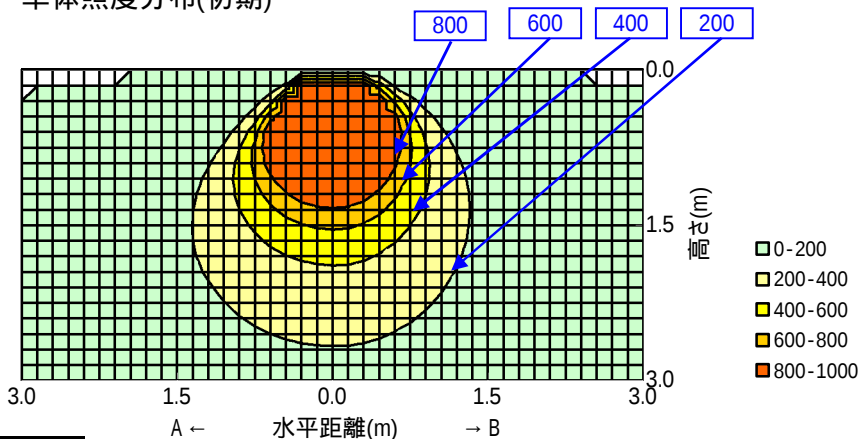

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	354	354	354		
10	351	351	350		
20	345	332	340		
30	323	304	317		
40	288	269	287		
50	212	222	243		
60	103	163	147		
70	46	102	65		
80	21	43	21		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

配光曲線

