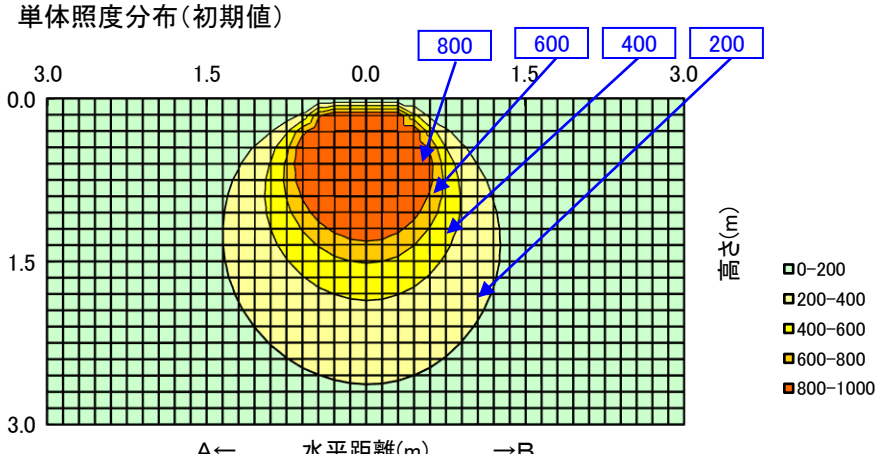
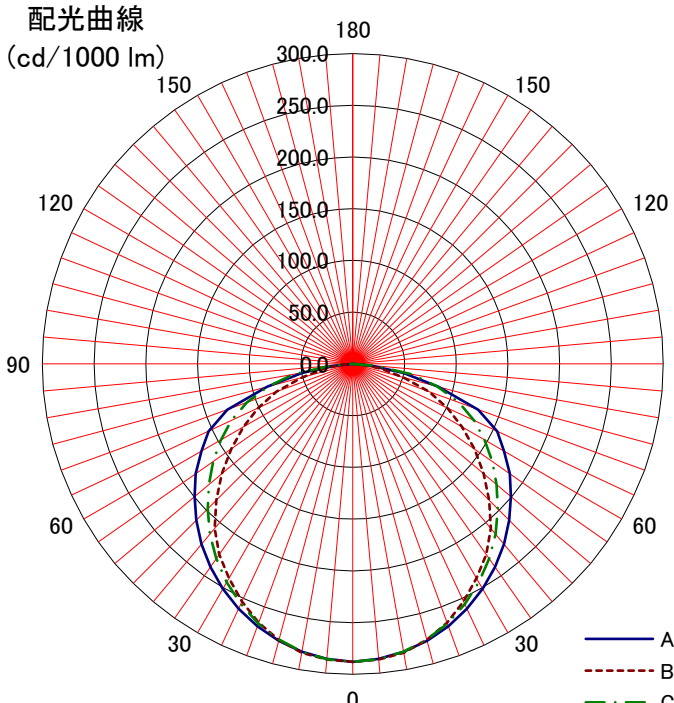
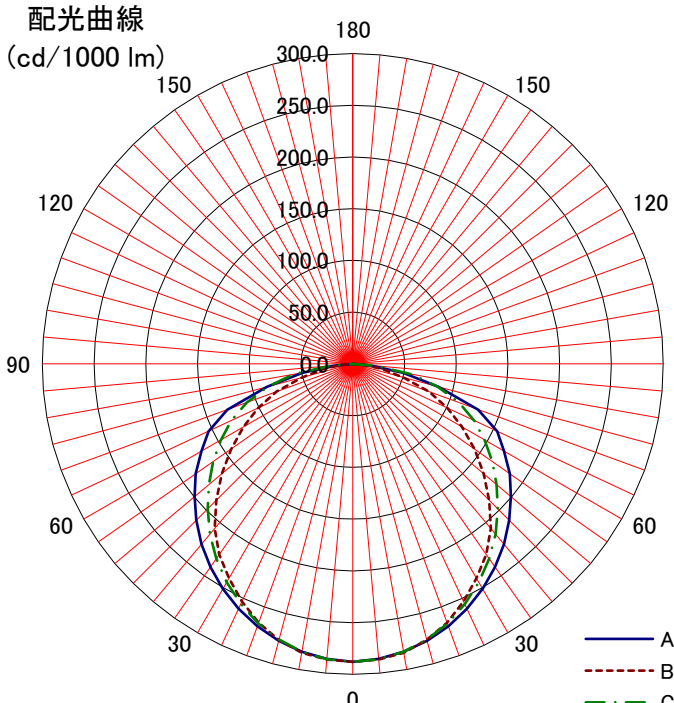


日立照明器具 照明特性																	
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
形式: NME4223-JM14AE	室指数	照明率 S/H=1.0															
<備考>	0.6	0.51	0.40	0.33	0.50	0.39	0.33	0.28	0.38	0.32	0.28	0.37	0.32	0.28	0.26		
	0.8	0.59	0.49	0.42	0.58	0.48	0.41	0.36	0.47	0.41	0.36	0.46	0.40	0.36	0.34		
姿図 	1	0.65	0.55	0.48	0.64	0.54	0.48	0.42	0.53	0.47	0.42	0.52	0.46	0.42	0.40		
	1.25	0.71	0.61	0.55	0.69	0.61	0.54	0.49	0.59	0.53	0.49	0.57	0.52	0.48	0.46		
	1.5	0.75	0.66	0.60	0.73	0.65	0.59	0.54	0.64	0.58	0.54	0.62	0.57	0.53	0.51		
	2	0.80	0.73	0.67	0.78	0.72	0.67	0.62	0.70	0.65	0.62	0.68	0.64	0.61	0.59		
	2.5	0.83	0.77	0.72	0.82	0.76	0.71	0.67	0.74	0.70	0.66	0.72	0.69	0.66	0.63		
	3	0.85	0.80	0.75	0.84	0.79	0.75	0.71	0.77	0.73	0.70	0.75	0.72	0.69	0.67		
	4	0.88	0.84	0.80	0.87	0.83	0.79	0.76	0.81	0.78	0.75	0.79	0.76	0.74	0.72		
光源	5	0.90	0.87	0.83	0.89	0.86	0.83	0.80	0.83	0.81	0.79	0.81	0.79	0.77	0.75		
品名 直管形LEDランプ	7	0.92	0.90	0.88	0.91	0.89	0.87	0.85	0.87	0.85	0.83	0.85	0.83	0.82	0.79		
形式 LDK40SS・N/15/24NE	10	0.94	0.92	0.91	0.93	0.91	0.90	0.88	0.89	0.88	0.87	0.87	0.86	0.85	0.83		
光束 4,800 lm																	
器具効率 Ft= 90.0%		単体照度分布(初期値) 															
上方光束 Fu= 0.0%																	
下方光束 Fd= 90.0%																	
最大取付間隔		配光曲線 															
A-A 1.32 H																	
B-B 1.24 H																	
保守率	良																0.86
	中																0.81
	否																0.72
光度 (cd/1000 lm)																	配光曲線 
A-0 288																	
B-B 288																	
C-0 288																	
A'-0																	
C'-0																	
0 288																	
10 283																	
20 270																	
30 251																	
40 228																	
50 200																	
60 169																	
70 129																	
80 50																	
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	