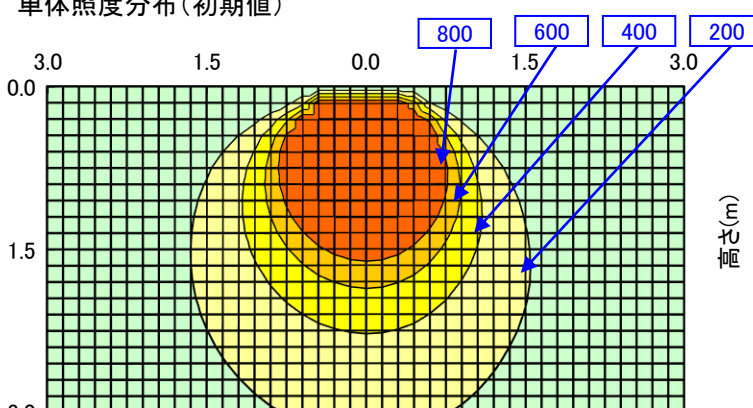
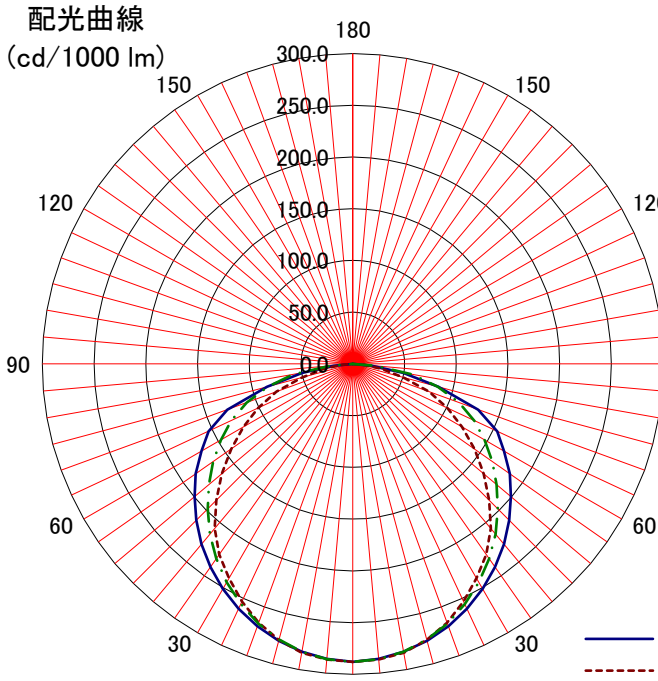


日立照明器具 照明特性																																																																																																																																								
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																								
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
形式: NME4223-JM14AE		床	10%														0%																																																																																																																							
<備考>	室指数	照明率 S/H=1.0																																																																																																																																						
		0.6	0.51	0.40	0.33	0.50	0.39	0.33	0.28	0.38	0.32	0.28	0.37	0.32	0.28	0.26																																																																																																																								
	0.8	0.59	0.49	0.42	0.58	0.48	0.41	0.36	0.47	0.41	0.36	0.46	0.40	0.36	0.34																																																																																																																									
	姿図	1	0.65	0.55	0.48	0.64	0.54	0.48	0.42	0.53	0.47	0.42	0.52	0.46	0.42	0.40																																																																																																																								
		1.25	0.71	0.61	0.55	0.69	0.61	0.54	0.49	0.59	0.53	0.49	0.57	0.52	0.48	0.46																																																																																																																								
		1.5	0.75	0.66	0.60	0.73	0.65	0.59	0.54	0.64	0.58	0.54	0.62	0.57	0.53	0.51																																																																																																																								
		2	0.80	0.73	0.67	0.78	0.72	0.67	0.62	0.70	0.65	0.62	0.68	0.64	0.61	0.59																																																																																																																								
		2.5	0.83	0.77	0.72	0.82	0.76	0.71	0.67	0.74	0.70	0.66	0.72	0.69	0.66	0.63																																																																																																																								
		3	0.85	0.80	0.75	0.84	0.79	0.75	0.71	0.77	0.73	0.70	0.75	0.72	0.69	0.67																																																																																																																								
		4	0.88	0.84	0.80	0.87	0.83	0.79	0.76	0.81	0.78	0.75	0.79	0.76	0.74	0.72																																																																																																																								
5		0.90	0.87	0.83	0.89	0.86	0.83	0.80	0.83	0.81	0.79	0.81	0.79	0.77	0.75																																																																																																																									
光源	7	0.92	0.90	0.88	0.91	0.89	0.87	0.85	0.87	0.85	0.83	0.85	0.83	0.82	0.79																																																																																																																									
	10	0.94	0.92	0.91	0.93	0.91	0.90	0.88	0.89	0.88	0.87	0.87	0.86	0.85	0.83																																																																																																																									
品名 直管形LEDランプ		単体照度分布 (初期値) 																																																																																																																																						
形式 LDK40SS・N/22/36NE																																																																																																																																								
光束 7,200 lm																																																																																																																																								
器具効率 Ft= 90.0%																																																																																																																																								
上方光束 Fu= 0.0%		配光曲線 (cd/1000 lm) 																																																																																																																																						
下方光束 Fd= 90.0%																																																																																																																																								
最大取付間隔																																																																																																																																								
A-A 1.32 H																																																																																																																																								
B-B 1.24 H																																																																																																																																								
保守率	良	0.86																																																																																																																																						
	中	0.81																																																																																																																																						
	否	0.72																																																																																																																																						
光度 (cd/1000 lm)		<table><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>288</td><td>288</td><td>288</td><td></td><td></td></tr><tr><td>10</td><td>283</td><td>284</td><td>283</td><td></td><td></td></tr><tr><td>20</td><td>270</td><td>266</td><td>267</td><td></td><td></td></tr><tr><td>30</td><td>251</td><td>239</td><td>244</td><td></td><td></td></tr><tr><td>40</td><td>228</td><td>208</td><td>215</td><td></td><td></td></tr><tr><td>50</td><td>200</td><td>165</td><td>181</td><td></td><td></td></tr><tr><td>60</td><td>169</td><td>122</td><td>147</td><td></td><td></td></tr><tr><td>70</td><td>129</td><td>79</td><td>109</td><td></td><td></td></tr><tr><td>80</td><td>50</td><td>29</td><td>59</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>																A-0	B-B	C-0	A'-0	C'-0	0	288	288	288			10	283	284	283			20	270	266	267			30	251	239	244			40	228	208	215			50	200	165	181			60	169	122	147			70	129	79	109			80	50	29	59			90						100						110						120						130						140						150						160						170						180					
	A-0	B-B	C-0	A'-0	C'-0																																																																																																																																			
0	288	288	288																																																																																																																																					
10	283	284	283																																																																																																																																					
20	270	266	267																																																																																																																																					
30	251	239	244																																																																																																																																					
40	228	208	215																																																																																																																																					
50	200	165	181																																																																																																																																					
60	169	122	147																																																																																																																																					
70	129	79	109																																																																																																																																					
80	50	29	59																																																																																																																																					
90																																																																																																																																								
100																																																																																																																																								
110																																																																																																																																								
120																																																																																																																																								
130																																																																																																																																								
140																																																																																																																																								
150																																																																																																																																								
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								