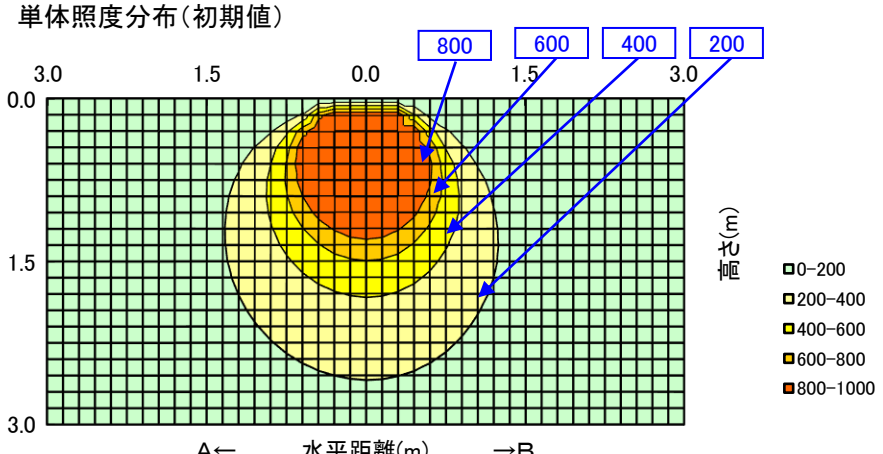
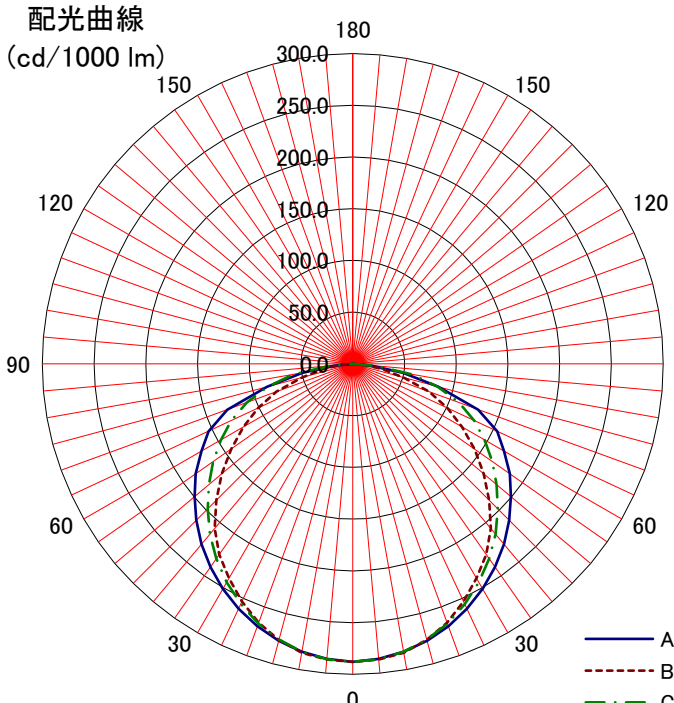


日立照明器具 照明特性																															
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%															
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%															
		床	10%													0%															
形式: NME4223-XM14E	室指数	照明率 S/H=1.0																													
<備考>	0.6	0.51	0.40	0.33	0.50	0.39	0.33	0.28	0.38	0.32	0.28	0.37	0.32	0.28	0.26																
	0.8	0.59	0.49	0.42	0.58	0.48	0.41	0.36	0.47	0.41	0.36	0.46	0.40	0.36	0.34																
姿図 	1	0.65	0.55	0.48	0.64	0.54	0.48	0.42	0.53	0.47	0.42	0.52	0.46	0.42	0.40																
	1.25	0.71	0.61	0.55	0.69	0.61	0.54	0.49	0.59	0.53	0.49	0.57	0.52	0.48	0.46																
	1.5	0.75	0.66	0.60	0.73	0.65	0.59	0.54	0.64	0.58	0.54	0.62	0.57	0.53	0.51																
	2	0.80	0.73	0.67	0.78	0.72	0.67	0.62	0.70	0.65	0.62	0.68	0.64	0.61	0.59																
	2.5	0.83	0.77	0.72	0.82	0.76	0.71	0.67	0.74	0.70	0.66	0.72	0.69	0.66	0.63																
	3	0.85	0.80	0.75	0.84	0.79	0.75	0.71	0.77	0.73	0.70	0.75	0.72	0.69	0.67																
	4	0.88	0.84	0.80	0.87	0.83	0.79	0.76	0.81	0.78	0.75	0.79	0.76	0.74	0.72																
光源	5	0.90	0.87	0.83	0.89	0.86	0.83	0.80	0.83	0.81	0.79	0.81	0.79	0.77	0.75																
品名 直管形LEDランプ	7	0.92	0.90	0.88	0.91	0.89	0.87	0.85	0.87	0.85	0.83	0.85	0.83	0.82	0.79																
形式 LDK40SS・D/15/23NE	10	0.94	0.92	0.91	0.93	0.91	0.90	0.88	0.89	0.88	0.87	0.87	0.86	0.85	0.83																
光束 4,660 lm																															
器具効率 Ft= 90.0%		単体照度分布(初期値) 																													
上方光束 Fu= 0.0%																															
下方光束 Fd= 90.0%																															
最大取付間隔																															
A-A		1.32	H																												
B-B		1.24	H																												
保守率	良	0.86																													
	中	0.81																													
	否	0.72																													
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																													
	A-0	B-B	C-0	A'-0	C'-0																										
0	288	288	288																												
10	283	284	283																												
20	270	266	267																												
30	251	239	244																												
40	228	208	215																												
50	200	165	181																												
60	169	122	147																												
70	129	79	109																												
80	50	29	59																												
90																															
100																															
110																															
120																															
130																															
140																															
150																															
160																															
170																															
180																															